

## 1117B

### 1.4A Bipolar Linear Regulator

#### Features

- Maximum output current is 1.2A
- Range of operation input voltage: Max 15V
- Line regulation: 0.03%/V (typ.)
- Standby current: 2mA (typ.)
- Load regulation: 0.2%/A (typ.)
- Environment Temperature: -40°C~125°C

#### Applications

- Power Management for Computer Mother Board, Graphic Card
- LCD Monitor and LCD TV
- DVD Decode Board
- ADSL Modem
- Post Regulators for Switching Supplies

#### General Description

1117B is a series of low dropout three-terminal regulators with a dropout of 1.3V at 1.2A load current.

1117B features a very low standby current 2mA compared to 5mA of competitor.


Other than a fixed version,  $V_{out} = 1.2V, 1.5V, 2.5V, 2.85V, 3.3V$ , and  $5V$ , 1117B has an adjustable version, which can provide an output voltage from 1.25 to 12V with only

two external resistors.

1117B offers thermal shut down function, to assure the stability of chip and power system. And it uses trimming technique to guarantee output voltage accuracy within 2%. Other output voltage accuracy can be customized on demand, such as 1%.

1117B is available in SOT -223, TO-252 packages.

#### Typical Application

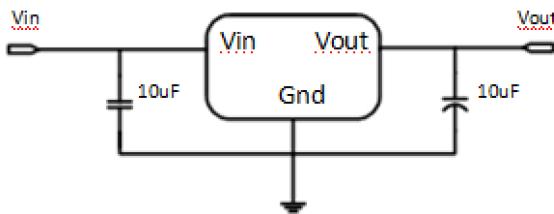

Application circuit of 1117A fixed version

#### Selection Table

Part No.	Symbol.	Output Voltage	Package	Marking
1117B	XX=12	1.2V	SOT-223 TO-252	1117B XX SSWW
	XX=15	1.5V		
	XX=25	2.5V		
	XX=33	3.3V		
	XX=50	5.0V		
	XX=ADJ	Adj		

Note: 1. "XX" stands for output voltage,


2. "SSWW" stands for order number and Data Code.

## Ordering Information

Part No.	Package Type	Packing type
1117B -XXV	SOT223	2500 Tape&Reel
1117B -XXTR	TO252	2500 Tape&Reel

Note: "XX" stands for output voltages.

## Block Diagram

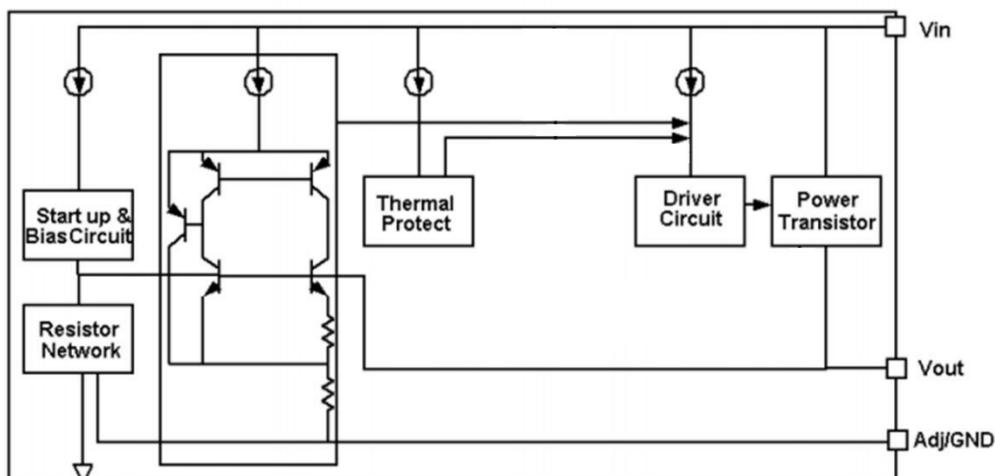

## Pin Configuration

SOT223 (Top View)



Table1: TX1117C series (SOT223 PKG)

PIN NO.	PIN NAME	FUNCTION
1	VSS/ADJ	VSS/ADJ pin
2	VOUT	Output voltage pin
3	VIN	Input voltage pin
4	VOUT	Output voltage pin

TO252 (Top View)

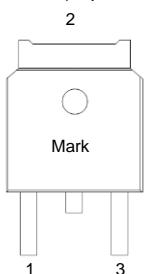


Table2: TX1117C-XXTR series (TO252 PKG)

PIN NO.	PIN NAME	FUNCTION
1	VSS/ADJ	VSS/ADJ pin
2	VOUT	Output voltage pin
3	VIN	Input voltage pin

## Absolute Maximum Ratings

Max Input Voltage .....	.....	18V
Max Operating Junction Temperature( $T_j$ ) .....	.....	150°C
Storage Temperature( $T_s$ ).....	.....	-55°C~150°C
Lead Temperature & Time.....	.....	260°C 10S
Caution: Exceed these limits to damage to the device. Exposure to absolute maximum rating conditions may affect device reliability.		

## Electrical Characteristics

$T_A=25^\circ\text{C}$ , unless otherwise noted.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{ref}$	Reference voltage	1117B -Adj 10mA $\leq$ $I_{out}$ $\leq$ 1.4A , $V_{in}=3.25\text{V}$	1.225	1.25	1.275	V
$V_{out}$	Output voltage	1117B -1.2V 0 $\leq$ $I_{out}$ $\leq$ 1.4A , $V_{in}=3.2\text{V}$	1.176	1.2	1.224	V
		1117B -1.5V 0 $\leq$ $I_{out}$ $\leq$ 1.4A , $V_{in}=3.8\text{V}$	1.764	1.8	1.836	V
		1117B -2.5V 0 $\leq$ $I_{out}$ $\leq$ 1.4A , $V_{in}=4.5\text{V}$	2.45	2.5	2.55	V
		1117B -3.3V 0 $\leq$ $I_{out}$ $\leq$ 1.4A , $V_{in}=5.3\text{V}$	3.234	3.3	3.366	V
		1117B -5.0V 0 $\leq$ $I_{out}$ $\leq$ 1.4A , $V_{in}=7.0\text{V}$	4.9	5.0	5.1	V

$\Delta V_{out}$	Line regulation	1117B -1.2V $I_{out}=10\text{mA}$ , $2.7\text{V} \leq V_{in} \leq 10\text{V}$		4	20	mV
		1117B -ADJ $I_{out}=10\text{mA}$ , $2.75\text{V} \leq V_{in} \leq 12\text{V}$		5	30	mV
		1117B -1.5V $I_{out}=10\text{mA}$ , $3.3\text{V} \leq V_{in} \leq 12\text{V}$		5	40	mV
		1117B -2.5V $I_{out}=10\text{mA}$ , $4.0\text{V} \leq V_{in} \leq 12\text{V}$		8	50	mV
		1117B -3.3V $I_{out}=10\text{mA}$ , $4.8\text{V} \leq V_{in} \leq 12\text{V}$		9	60	mV
		1117B -5.0V $I_{out}=10\text{mA}$ , $6.5\text{V} \leq V_{in} \leq 12\text{V}$		10	70	mV

		1117B -1.2V		2	24	mV
--	--	-------------	--	---	----	----

$\Delta V_{out}$	Load regulation	Vin = 2.7V, 10mA $\leq I_{out} \leq 1.4A$				
		1117B -ADJ Vin = 2.75V, 10mA $\leq I_{out} \leq 1.4A$		2	25	mV
		1117B -1.5V Vin = 3.3V, 10mA $\leq I_{out} \leq 1.4A$		3	36	mV
		1117B -2.5V Vin = 4.0V, 10mA $\leq I_{out} \leq 1.4A$		4	50	mV
		1117B -3.3 Vin = 4.8V, 10mA $\leq I_{out} \leq 1.4A$		6	66	mV
		1117B-5.0 Vin = 6.5V, 10mA $\leq I_{out} \leq 1.4A$		9	100	mV
		Iout = 100mA		1.2	1.3	V
Vdrop	Dropout voltage	Iout = 1.4A		1.3	1.5	V
		Imin	Minimum load current	1117B -ADJ	2	10
Iq	Quiescent Current	1117B -1.2V, Vin=10V		2	5	mA
		1117B -1.5V, Vin=12V		2	5	mA
		1117B -2.5V, Vin=12V		2	5	mA
		1117B -3.3V, Vin=12V		2	5	mA
		1117B -5.0V, Vin=12V		2	5	mA
IAdj	Adjust pin current	1117B -ADJ Vin=5V, 10mA $\leq I_{out} \leq 1.4A$		55	120	uA
Ichange	Iadj change	1117B -ADJ Vin=5V, 10mA $\leq I_{out} \leq 1.4A$		0.2	10	uA
$\Delta V / \Delta T$	Temperature coefficien			$\pm 100$		ppm
$\theta_{JC}$	Thermal resistance	SOT-223		20		°C/W
		TO-252		10		

Note1: All test are conducted under ambient temperature 25° C and within a short period of time 20ms

Note2: Load current smaller than minimum load current of 1117B -ADJ will lead to unstable or oscillation output.

## Detailed Description


1117B is a series of low dropout voltage, three terminal regulators. Its application circuit is very simple: the fixed version only needs two capacitors and the adjustable version only needs two resistors and two capacitors to work. It is composed of some modules including start-up circuit, bias circuit, bandgap, thermal shutdown, power transistors and its driver circuit and so on.

The bandgap module provides stable reference voltage, whose temperature coefficient is compensated by careful design considerations. The temperature coefficient is under 100 ppm/°C. And the accuracy of output voltage is guaranteed by trimming technique.

## Typical Application

JTD1117B has an adjustable version and six fixed versions (1.2V, 1.5V, 2.5V, 3.3V and 5V)


### Fixed Output Voltage Version

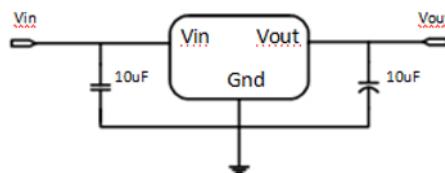

Application circuit of JTD1117B fixed version

- 1) Recommend using 10uF tan capacitor as bypass capacitor (C1) for all application circuit.
- 2) Recommend using 10uF tan capacitor to assure circuit stability.

### Adjustable Output Voltage Version

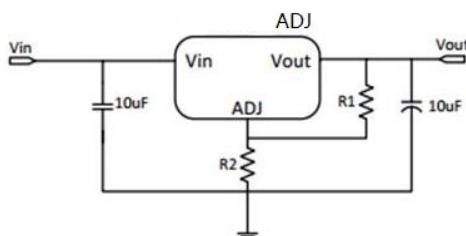

Application Circuit of 1117B -ADJ

The output voltage of adjustable version follows the equation:  $V_{out} = 1.25 \times (1 + R2/R1) + I_{Adj} \times R2$ . We can ignore  $I_{Adj}$  because  $I_{Adj}$  (about 50uA) is much less than the current of R1 (about 2~10mA).

- 1) To meet the minimum load current (>10mA) requirement, R1 is recommended to be 125ohm or lower. As 1117B -ADJ can keep itself stable at load current about 2mA, R1 is not allowed to be higher than 625ohm.
- 2) Using a bypass capacitor ( $C_{ADJ}$ ) between the ADJ pin and ground can improve ripple rejection. This bypass capacitor prevents ripple from being amplified as the output voltage is increased. The impedance of  $C_{ADJ}$  should be less than R1 to prevent ripple from being amplified. As R1 is normally in the range of 100Ω~500Ω, the value of  $C_{ADJ}$  should satisfy this equation:  $1/(2 \pi \times f_{ripple} \times C_{ADJ}) < R1$ .

## Thermal Considerations


We have to take heat dissipation into great consideration when output current or differential voltage of input and output voltage is large. Because in such cases, the power dissipation consumed by 1117B is very large. 1117B series uses SOT-223 package type and its thermal resistance is about 20°C/W. And the copper area of application board can affect the total thermal resistance. If copper area is 5cm\*5cm (two sides), the resistance is about 30°C/W. So the total thermal resistance is about 20°C/W + 30°C/W. We can decrease total thermal resistance by increasing copper area in application board. When there is no good heat dissipation copper are in PCB, the total thermal resistance will be as high as 120°C/W, then the power dissipation of 1117B could allow on itself is less than 1W. And furthermore, 1117B will work at junction temperature higher than 125°C under such condition and no lifetime is guaranteed.

## Typical Performance Characteristics

$T_A=25^\circ\text{C}$ , unless otherwise noted.


### Line regulation

1117C-ADJ Vout Vs. Vin

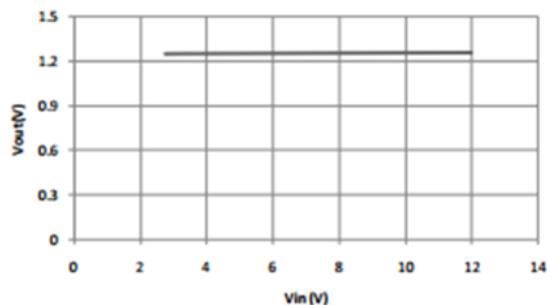


### Load regulation

1117C-ADJ Vout Vs. Iout

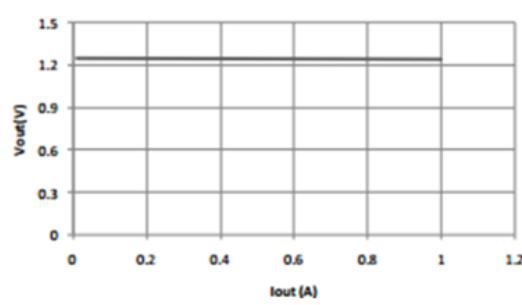


### Dropout voltage

Dropout voltage

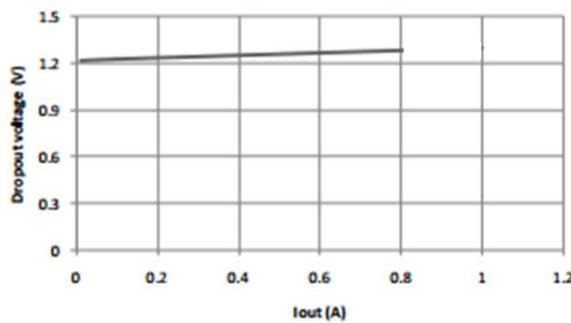


### Thermal performance with OTP

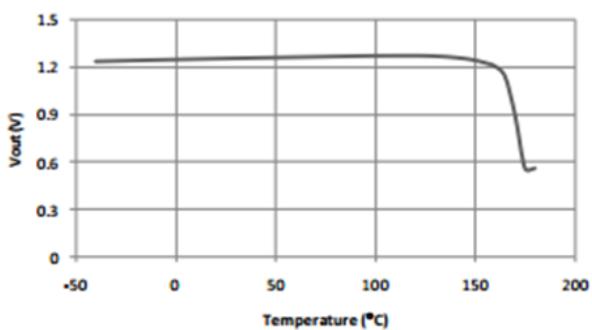


## Package Information

### SOT-223 PACKAGE OUTLINE DIMENSIONS

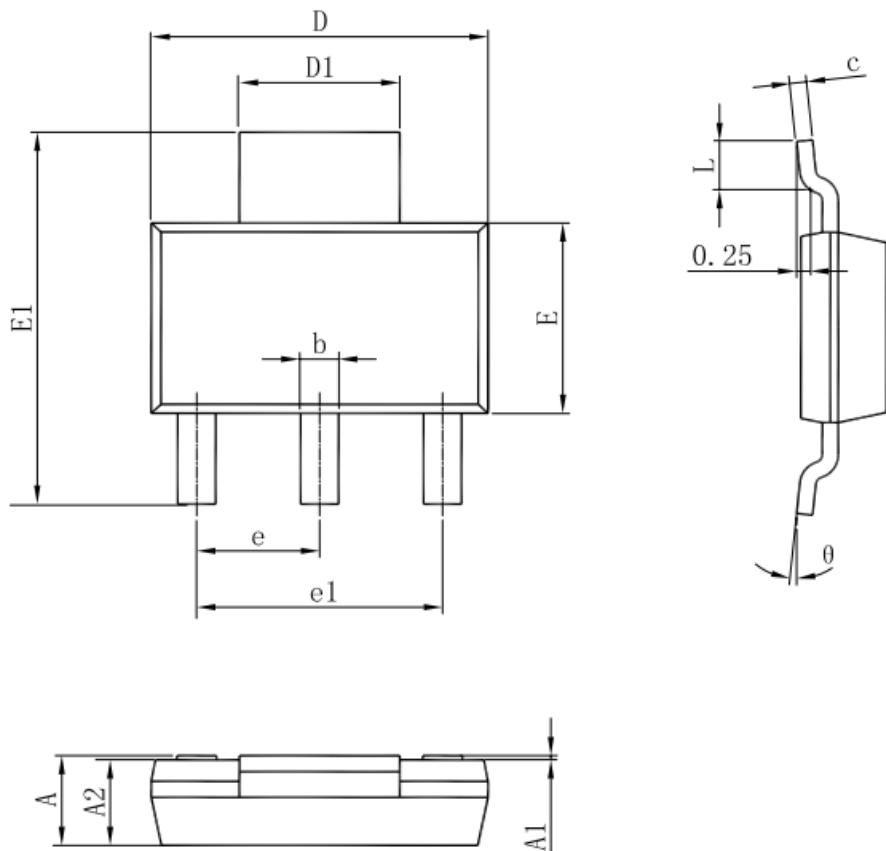

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.520	1.800	0.060	0.071
A1	0.000	0.100	0.000	0.004
A2	1.500	1.700	0.059	0.067
b	0.660	0.820	0.026	0.032
c	0.250	0.350	0.010	0.014
D	6.200	6.400	0.244	0.252
D1	2.900	3.100	0.114	0.122
E	3.300	3.700	0.130	0.146
E1	6.830	7.070	0.269	0.278
e	2.300(BSC)		0.091(BSC)	
e1	4.500	4.700	0.177	0.185
L	0.900	1.150	0.035	0.045
θ	0°	10°	0°	10°

## TO-252-2L PACKAGE OUTLINE DIMENSIONS

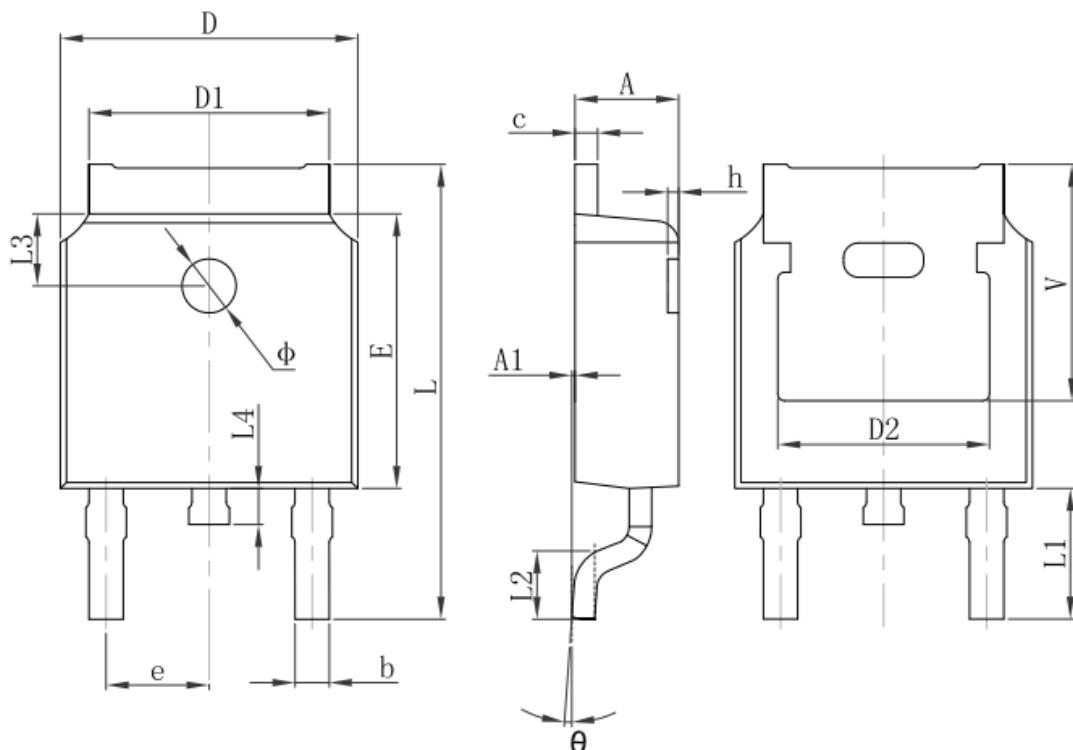

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.660	0.860	0.026	0.034
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 REF.		0.190 REF.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.800	10.400	0.386	0.409
L1	2.900 REF.		0.114 REF.	
L2	1.400	1.700	0.055	0.067
L3	1.600 REF.		0.063 REF.	
L4	0.600	1.000	0.024	0.039
Φ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.350 REF.		0.211 REF.	