


DC/DC Converter

VRB48_LD-50W(H)R3(A2S/A4S) Series

MORNSUN®

50W isolated DC-DC converter in 2x1 inch
Wide input and regulated single output

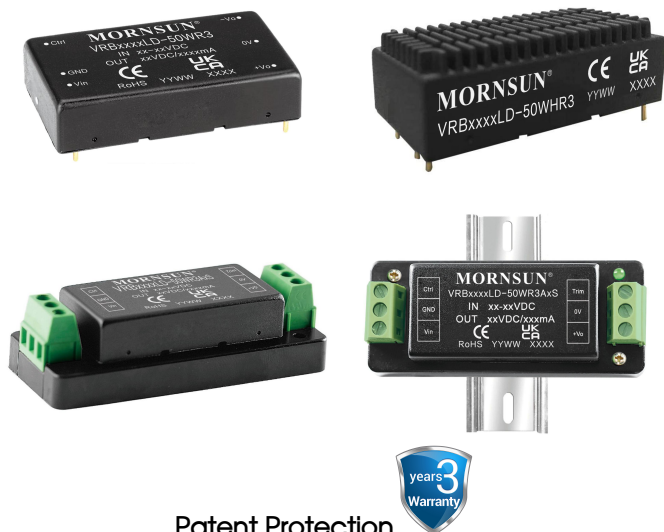

Patent Protection
CE Report EN62368-1
UKCA Report BS EN62368-1
RoHS

FEATURES

- Wide 2:1 input voltage range
- High efficiency up to 92%
- I/O isolation test voltage 1.5k VDC
- Input under-voltage protection, output short circuit, over-current, over-voltage protection
- Operating ambient temperature range: -40°C to +105°C
- No-load power consumption as low as 0.048W
- Six-sided metal shielding package
- Input reverse polarity protection available with chassis (A2S) or DIN-Rail mounting (A4S) version
- Industry standard pin-out
- Meets IEC62368 standards

VRB48_LD-50W(H)R3(A2S/A4S) series of isolated 50W DC-DC converter products with a wide 2:1 input voltage range. They feature efficiencies up to 92%, input to output isolation is tested with 1500VDC and the converter safely operate ambient temperature of -40°C to +105°C, input under-voltage protection, output short-circuit, over-current, over-voltage protection. They are ideally and widely used in applications such as industrial control, electric power, instruments and communications.

Selection Guide

| Certification | Part No. ① | Input Voltage (VDC) | | Output | | Full Load Efficiency ④ (%) Min./Typ. | Capacitive Load (μF)Max. |
|---------------|-----------------------------|---------------------|--------|---------------|-----------------------|--------------------------------------|--------------------------|
| | | Nominal ② (Range) | Max. ③ | Voltage (VDC) | Current(mA) Max./Min. | | |
| EN/BS EN | VRB4803LD-50W(H)R3(A2S/A4S) | 48 (36-75) | 80 | 3.3 | 10000/0 | 89/91 | 27000 |
| | VRB4805LD-50W(H)R3(A2S/A4S) | | | 5 | 10000/0 | 89/91 | 18900 |
| | VRB4812LD-50W(H)R3(A2S/A4S) | | | 12 | 4167/0 | 90/92 | 3700 |
| | VRB4815LD-50W(H)R3(A2S/A4S) | | | 15 | 3333/0 | 90/92 | 2000 |
| | VRB4824LD-50W(H)R3(A2S/A4S) | | | 24 | 2083/0 | 90/92 | 1000 |

Note:
① Use "H" suffix for heat sink mounting, "A2S" suffix for chassis mounting and "A4S" suffix for DIN-Rail mounting. We recommend to choose modules with a heat sink for enhanced heat dissipation and applications with extreme temperature requirements;
② The minimum input voltage and starting voltage of A2S and A4S Model are 1VDC higher than those of DIP package due to input reverse polarity protection function;
③ Exceeding the maximum input voltage may cause permanent damage;
④ Efficiency is measured at nominal input voltage and rated output load; efficiencies for A2S and A4S Model's is decreased by 2% due to the input reverse polarity protection circuit.

Input Specifications

| Item | Operating Conditions | | Min. | Typ. | Max. | Unit |
|-------------------------------------|--|-------------|------|--------|---------|------|
| Input Current (full load / no-load) | Nominal input voltage | 3.3V output | -- | 756/1 | 773/-- | mA |
| | | 5V output | -- | 1145/2 | 1171/-- | |
| | | 12V output | -- | 1133/4 | 1158/-- | |
| | | 15V output | -- | 1133/4 | 1158/-- | |
| | | 24V output | -- | 1133/3 | 1158/-- | |
| Surge Voltage (1sec. max.) | | | -0.7 | -- | 80 | VDC |
| Start-up Voltage | | | -- | -- | 36 | |
| Input Under-voltage Protection | | | 26 | 30 | -- | |
| Start-up Time | Nominal input voltage & constant resistance load | | -- | 10 | 120 | ms |

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2024.09.20-A/5 Page 1 of 8

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

| | | | | | |
|--------------|------------------------|--|---|----|----|
| Input Filter | | PI filter | | | |
| Hot Plug | | Unavailable | | | |
| Ctrl* | Module on | Ctrl pin open or pulled high (TTL 3.0-12VDC) | | | |
| | Module off | Ctrl pin pulled low to GND (0-1.2VDC) | | | |
| | Input current when off | -- | 2 | 12 | mA |

Note: *The Ctrl pin voltage is referenced to input GND.

Output Specifications

| Item | Operating Conditions | | Min. | Typ. | Max. | Unit |
|------------------------------|---|----------------|---------------------------|------|-------|--------|
| Voltage Accuracy | 5%-100% load | | -- | ±1 | ±3 | % |
| Linear Regulation | Input voltage variation from low to high at full load | | -- | ±0.2 | ±0.5 | |
| Load Regulation | 5%-100% load | | -- | ±0.5 | ±1 | |
| Transient Recovery Time | 25% load step change, nominal input voltage | | -- | 250 | 500 | μs |
| Transient Response Deviation | 25% load step change, input voltage range | 3.3V/5V output | -- | ±3 | ±8 | % |
| | | others | -- | ±3 | ±5 | |
| Temperature Coefficient | Full load | | -- | -- | ±0.03 | %/℃ |
| Ripple & Noise* | 20MHz bandwidth, 5%-100% load | 3.3V/5V output | -- | 170 | 200 | mV p-p |
| | | 12V/15V output | -- | 200 | 250 | |
| | | 24V output | -- | 180 | 350 | |
| Trim | Input voltage range | | 90 | -- | 110 | %Vo |
| Over-voltage Protection | | | 110 | 140 | 160 | |
| Over-current Protection | | | 110 | 140 | 200 | %Io |
| Short Circuit Protection | | | Continuous, self-recovery | | | |

Note: *The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit |
|--------------------------------------|---|--|------|------|---------|
| Isolation | Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max. | 1500 | -- | -- | VDC |
| | Input/output-Housing Electric Strength Test for 1 minute with a leakage current of 1mA max. | 1000 | -- | -- | |
| Insulation Resistance | Input-output resistance at 500VDC | 100 | -- | -- | MΩ |
| Isolation Capacitance | Input-output capacitance at 100kHz/0.1V | -- | 2200 | -- | pF |
| Operating Temperature | See Fig. 1 | -40 | -- | +105 | °C |
| Storage Temperature | | -55 | -- | +125 | |
| Storage Humidity | Non-condensing | 5 | -- | 95 | %RH |
| Pin Soldering Resistance Temperature | Soldering spot is 1.5mm away from case for 10 seconds | -- | -- | +300 | °C |
| Vibration | | 10-150Hz, 5G, 0.75mm. along X, Y and Z | | | |
| Switching Frequency * | PWM mode | -- | 300 | -- | kHz |
| MTBF | MIL-HDBK-217F@25°C | 1000 | -- | -- | k hours |

Note: *Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.


Mechanical Specifications

| | | | |
|----------------|---------------------|---|--------------------------|
| Case Material | Aluminum alloy | | |
| Dimensions | Without heat sink | Horizontal package | 50.80 x 25.40 x 11.80 mm |
| | | A2S chassis mounting | 76.00 x 31.50 x 21.20 mm |
| | | A4S DIN-Rail mounting | 76.00 x 31.50 x 25.80 mm |
| | With heat sink | Horizontal package | 51.40 x 26.20 x 16.50 mm |
| | | A2S chassis mounting | 76.00 x 31.50 x 25.30 mm |
| | | A4S DIN-Rail mounting | 76.00 x 31.50 x 29.90 mm |
| Weight | Without heat sink | Horizontal package/A2S chassis mounting/A4S DIN-Rail mounting | 39g/62g/82g (Typ.) |
| | With heat sink | Horizontal package/A2S chassis mounting/A4S DIN-Rail mounting | 47g/70g/90g (Typ.) |
| Cooling Method | Free air convection | | |

Electromagnetic Compatibility (EMC)

| | | | |
|-----------|-------|-----------------|--|
| Emissions | CE | CISPR32/EN55032 | CLASS B (see Fig.3-② for recommended circuit) |
| | RE | CISPR32/EN55032 | CLASS B (see Fig.3-② for recommended circuit) |
| Immunity | ESD | IEC/EN61000-4-2 | Contact $\pm 6\text{kV}$ perf. Criteria B |
| | RS | IEC/EN61000-4-3 | 10V/m perf. Criteria A |
| | EFT | IEC/EN61000-4-4 | 100kHz $\pm 2\text{kV}$ (see Fig.3-① for recommended circuit) perf. Criteria B |
| | Surge | IEC/EN61000-4-5 | line to line $\pm 2\text{kV}$ (see Fig.3-① for recommended circuit) perf. Criteria B |
| | CS | IEC/EN61000-4-6 | 10 Vr.m.s perf. Criteria A |


Typical Characteristic Curves

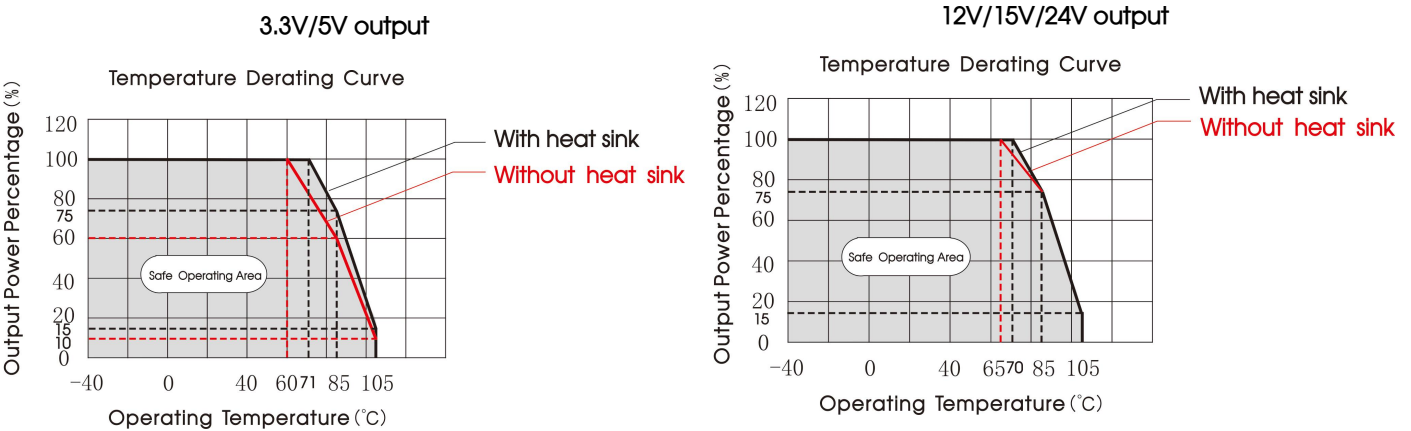

Design Reference

1. Typical application

All DC-DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2. Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.

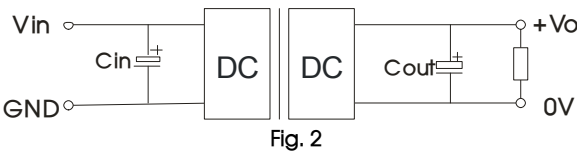

| Vout (VDC) | Cin (μF) | Cout (μF) |
|------------|-------------------------|------------------------|
| 3.3 | 100 μF /100V | 470 μF /10V |
| 5 | | 470 μF /10V |
| 12/15 | | 100 μF /25V |
| 24 | | 47 μF /50V |

2. EMC compliance circuit

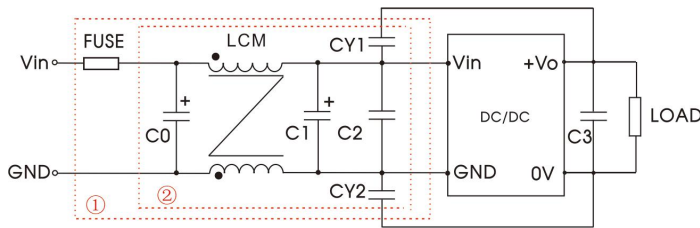



Fig. 3

Note: We use Part ① in Fig. 3 for Immunity tests and Part ② for Emissions test.
Selecting based on needs.

Parameter description:

| Model | Vin: 48V |
|----------|--|
| FUSE | T/2A/250VAC |
| C0 | 330μF/100V |
| LCM | 2.2mH, recommended to use MORNSUN P/N: FL2D-30-222 |
| C1 | 330μF/100V |
| C2 | 2.2μF/100V |
| CY1, CY2 | Y1 Safety capacitor 3.3nF/250VAC |
| C3 | Refer to the Cout in Fig.2 |

3. Trim Function for Output Voltage Adjustment (open if unused)

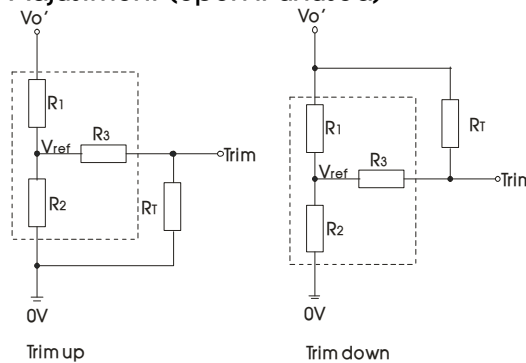

TRIM resistor connection (dashed line shows internal resistor network)

Calculating Trim resistor values:

$$\begin{aligned} \text{up: } R_T &= \frac{aR_2}{R_2-a} - R_3 & a &= \frac{V_{ref}}{V_{o'} - V_{ref}} \cdot R_1 \\ \text{down: } R_T &= \frac{aR_1}{R_1-a} - R_3 & a &= \frac{V_{o'} - V_{ref}}{V_{ref}} \cdot R_2 \end{aligned}$$

R_T is Trim resistance
 a is a self-defined parameter, with no real meaning.


| Vout(V) | Vout adjustable value(V) | RT(kΩ) | R1(kΩ) | R2(kΩ) | R3(kΩ) | Vref(V) |
|---------|--------------------------|--------|--------|--------|--------|---------|
| 3.3 | Up: 3.63 | 10 | 4.83 | 2.87 | 10 | 1.24 |
| | Down: 2.97 | 13.5 | 4.83 | 2.87 | 10 | 1.24 |
| 5 | Up: 5.5 | 4.3 | 2.87 | 2.87 | 10 | 2.5 |
| | Down: 4.5 | 1.5 | 2.87 | 2.87 | 10 | 2.5 |
| 12 | Up: 13.2 | 7.6 | 10.90 | 2.87 | 15 | 2.5 |
| | Down: 10.8 | 60.7 | 10.90 | 2.87 | 15 | 2.5 |
| 15 | Up: 16.5 | 8.9 | 14.35 | 2.87 | 15 | 2.5 |
| | Down: 13.5 | 90.2 | 14.35 | 2.87 | 15 | 2.5 |
| 24 | Up: 26.4 | 21.6 | 24.77 | 2.87 | 5.1 | 2.5 |
| | Down: 21.6 | 185.9 | 24.77 | 2.87 | 5.1 | 2.5 |

4. The products do not support parallel connection of their output


5. For additional information please refer to DC-DC converter application notes on

www.mornsun-power.com

VRB48_LD-50WR3 Dimensions and Recommended Layout

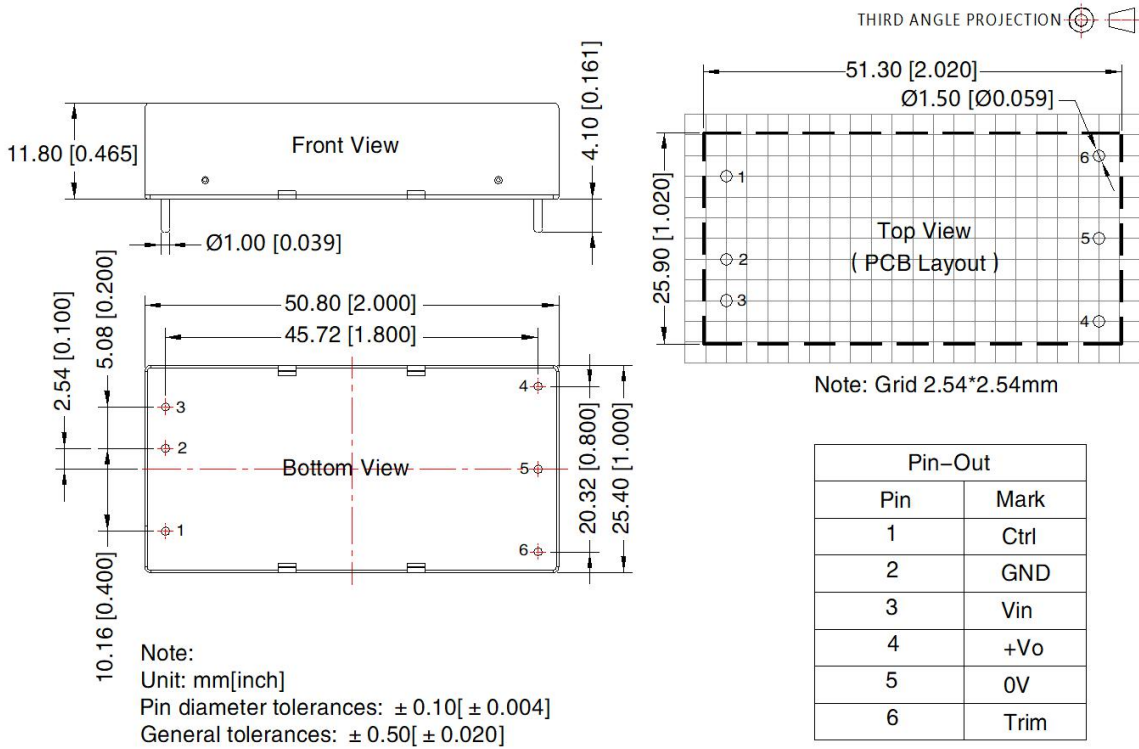


VRB48_LD-50WR3A2S Dimensions and Recommended Layout

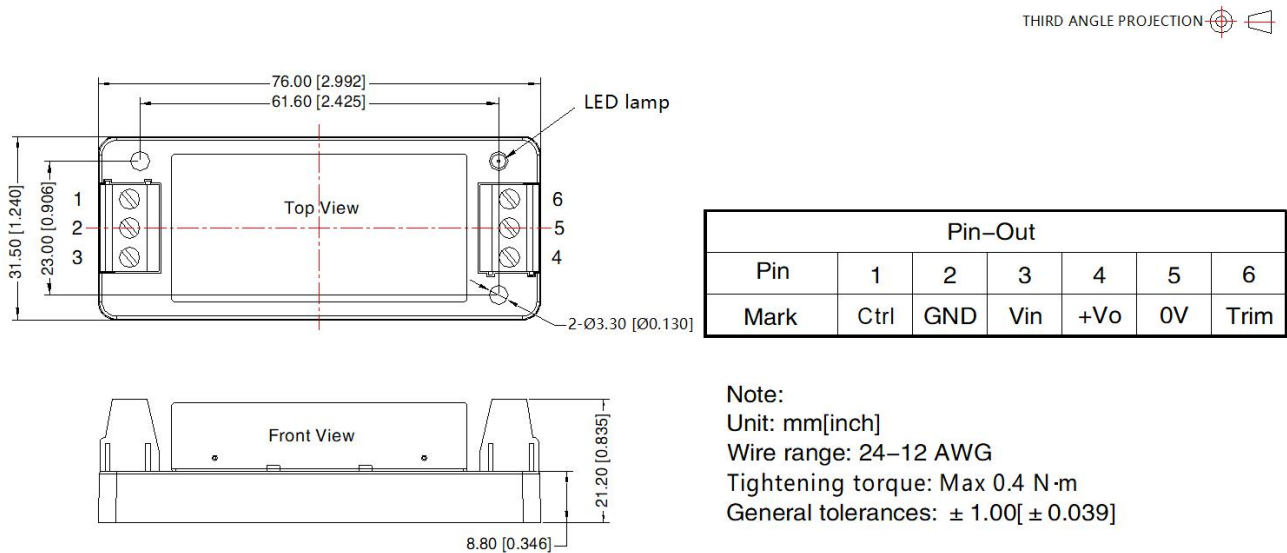


VRB48_LD-50WR3A4S Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

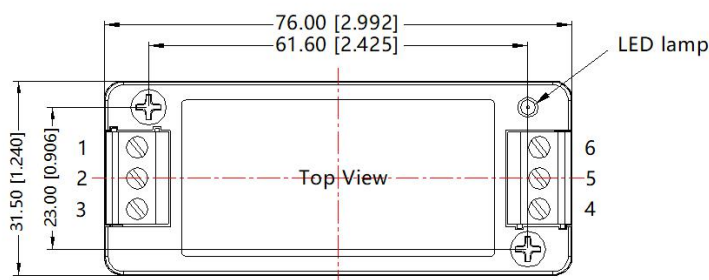


| Pin-Out | | | | | | |
|---------|------|-----|-----|-----|----|------|
| Pin | 1 | 2 | 3 | 4 | 5 | 6 |
| Mark | Ctrl | GND | Vin | +Vo | 0V | Trim |

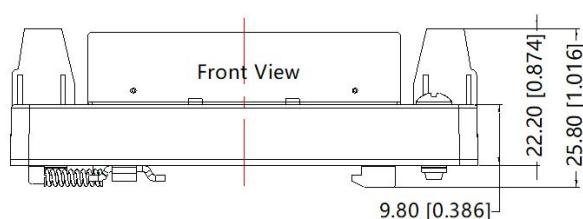


Note:
Unit: mm[inch]
Mounting rail: TS35
Wire range: 24-12 AWG
Tightening torque: Max 0.4 N·m
General tolerances: $\pm 1.00 [\pm 0.039]$

VRB48_LD-50WHR3 Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

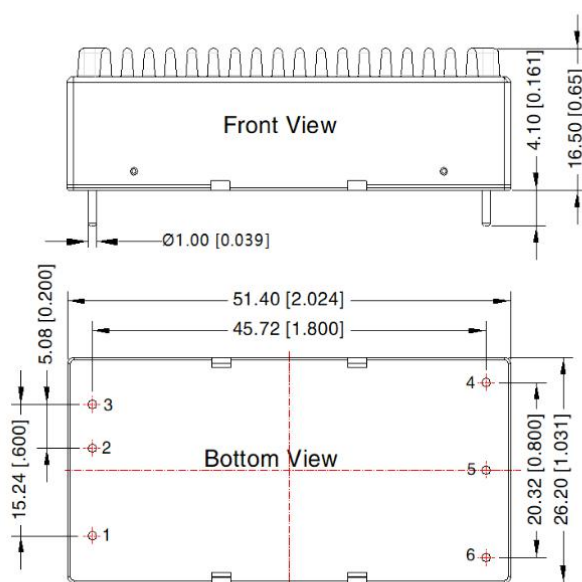


Note:
Unit: mm[inch]
Pin diameter tolerances: $\pm 0.10 [\pm 0.004]$
General tolerances: $\pm 0.50 [\pm 0.020]$

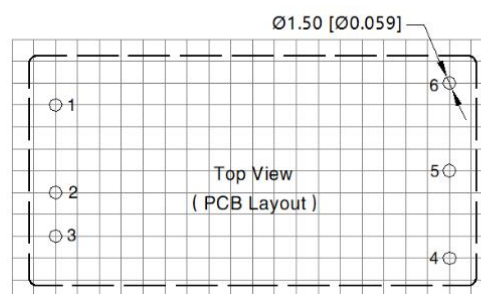


Note: Grid 2.54*2.54mm


| Pin-Out | |
|---------|------|
| Pin | Mark |
| 1 | Ctrl |
| 2 | GND |
| 3 | Vin |
| 4 | +Vo |
| 5 | 0V |
| 6 | Trim |

VRB48_LD-50WHR3A2S Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

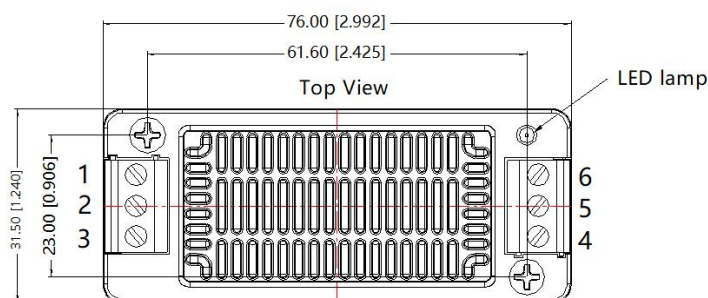


| Pin-Out | | | | | | |
|---------|------|-----|-----|-----|----|------|
| Pin | 1 | 2 | 3 | 4 | 5 | 6 |
| Mark | Ctrl | GND | Vin | +Vo | 0V | Trim |

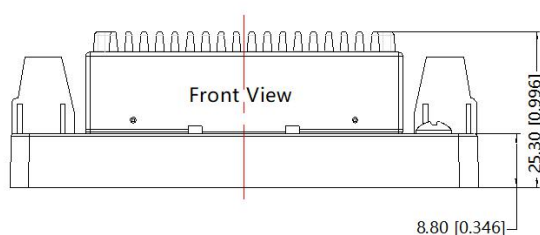


Note:
Unit: mm[inch]
Mounting rail: TS35
Wire range: 24-12 AWG
Tightening torque: Max 0.4 N·m
General tolerances: $\pm 1.00 [\pm 0.039]$

VRB48_LD-50WHR3A4S Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

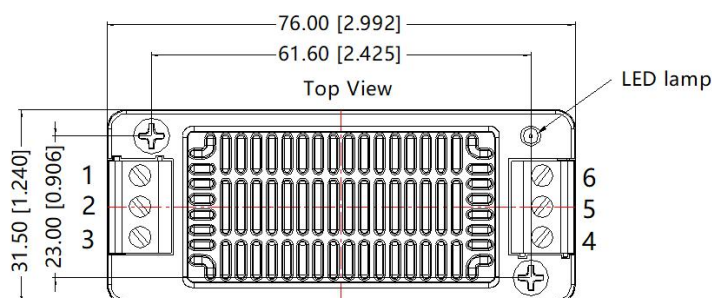

| Pin-Out | | | | | | |
|---------|------|-----|-----|-----|----|------|
| Pin | 1 | 2 | 3 | 4 | 5 | 6 |
| Mark | Ctrl | GND | Vin | +Vo | 0V | Trim |

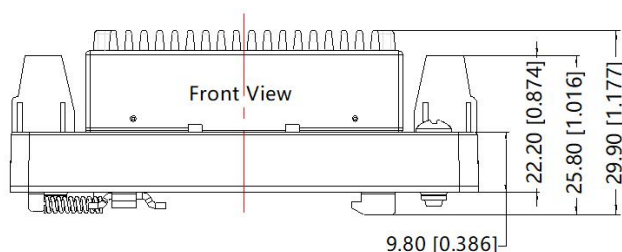

Note:
Unit: mm[inch]
Mounting rail: TS35
Wire range: 24-12 AWG
Tightening torque: Max 0.4 N·m
General tolerances: $\pm 1.00 [\pm 0.039]$

Note:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. The Packaging bag number of Horizontal packaging: 58200035(without heat sink), 58200051(with heat sink), A2S/A4S packaging number: 58220022(without heat sink and with heat sink);
2. It is recommended to use at more than 10% load. If the load is lower than 10%, the ripple of the product may exceed the specifications, but the reliability of the product is not affected.
3. The maximum capacitive load offered were tested at nominal input voltage and full load;
4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
5. All index testing methods in this datasheet are based on company corporate standards;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8 Nanyun 4th Road, Huangpu District, Guangzhou, China
Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com