




1.Features


- V_{DS} 1200V
- I_D 74A
- $R_{DS(ON)}$ 37 m Ω

TO-247-3



2.Mechanical Data

- Case:Molded Plastic,TO-247-3;
- Epoxy:UL 94V-0 rate flame retardant
- Terminals:Plated Leads Solderable per MIL-STD-750,Method-2026.
- Marking: marked on body.
- Mounting Position : Any.



3.Maximum Ratings and Electrical Characteristics

Rating at 25°C Cambient temperature unless otherwise specified

Characteristics		Symbol	Ratings	Unit
Drain-Source Voltage		V_{DS}	1200	V
Drain Current Continuous	$T_C=25^{\circ}\text{C}$	I_D	74	A
	$T_C=100^{\circ}\text{C}$		52	
PeakDrain Current		I_{DM}	150	A
Gate-Source Voltage		V_{GSmax}	-8/+22	V
Recommend Gate-Source Voltage		V_{GSop}	-4/+18	V
Power Dissipation	$T_C=25^{\circ}\text{C}$	P_{tot}	312	W
	$T_C=100^{\circ}\text{C}$		156	
Maximum Junction Temperature		T_J	-40~175	$^{\circ}\text{C}$
Storage Temperature Range		T_{stg}	-40~175	$^{\circ}\text{C}$
Thermal Resistance from Junction to Case		$R_{th(j-c)}$	0.48	$^{\circ}\text{C/W}$



Characteristics		Symbol	Test conditions	Min	TYP	Max	Unit
Static Characteristics							
Drain -Source Breakdown Voltage		BV _{DSS}	V _{GS} = 0V,I _D =0.1mA	1200	-	-	V
Zero Gate Voltage Drain Current		I _{DSS}	V _{DS} = 1200V,V _{GS} = 0V	-	1	-	uA
Gate-Source Leakage Current		I _{GSS}	V _{GS} = 0V,V _{DS} =18V	-	-	250	nA
Gate Threshold Voltage	T _J =25°C	V _{GS (th)}	V _{GS} = V _{DS} , I _D =10mA	2.0	2.6	4.0	V
	T _J =175°C			-	2	-	
Drain-Source On-State Resistance	T _J =25°C	R _{DS(on)}	V _{GS} =18V, I _D =40A	-	37	-	mΩ
	T _J =175°C			-	47	-	
Dynamic Characteristics							
Input Capacitance		C _{iss}	V _{DS} =1000V V _{GS} =0V f = 100kHz	-	2975	-	pF
Output Capacitance		C _{oss}		-	119	-	
Reverse Transfer Capacitance		C _{rss}		-	12	-	
Total Gate Charge		Q _g	V _{DS} =800V, V _{GS} =-4/18V I _D =40A	-	117	-	nC
Gate-Source Charge		Q _{gs}		-	38	-	
Gate-Drain Charge		Q _{gd}		-	27	-	
Switching Characteristics							
Turn-on Delay Time		t _{d(on)}	V _{DD} =800V, V _{GS} =-4V/18V I _D =40A ,R _G =2.5Ω	-	22	-	ns
Turn-on Rise Time		t _r		-	30	-	
Turn-off Delay Time		t _{d(off)}		-	33	-	
Turn-off Fail Time		t _f		-	11	-	
Turn-On Energy		E _{on}		-	701	-	
Turn-Off Energy		E _{off}		-	80	-	
Drain-Source Diode Characteristics							
Diode Forward Voltage	T _J =25°C	V _{SD}	V _{GS} =-4V, I _{SD} =20A	-	5	-	V
	T _J =175°C			-	4.4	-	
Continuous Diode Forward Current	T _J =25°C	I _S	V _{GS} =-4V	-	45	-	A
	T _J =100°C			-	20	-	
Reverse Recovery Time		T _{rr}	V _{GS} =-4V, I _{SD} =40A, V _R =800V, di/dt=3900A/μs	-	20	-	ns
Reverse Recovery Charge		Q _{rr}		-	540	-	nC
Peak reverse recovery current		I _{rrm}		-	52	-	A



4. Rating And Characteristic Curves

Fig.1 Output Characteristics $T_j = -40^\circ\text{C}$

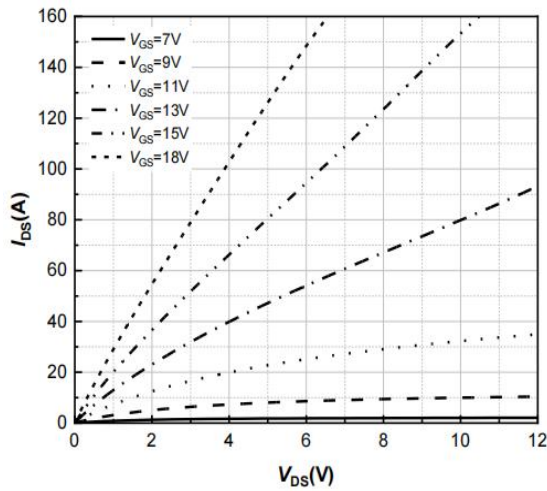


Fig.2 Output Characteristics $T_j = 25^\circ\text{C}$

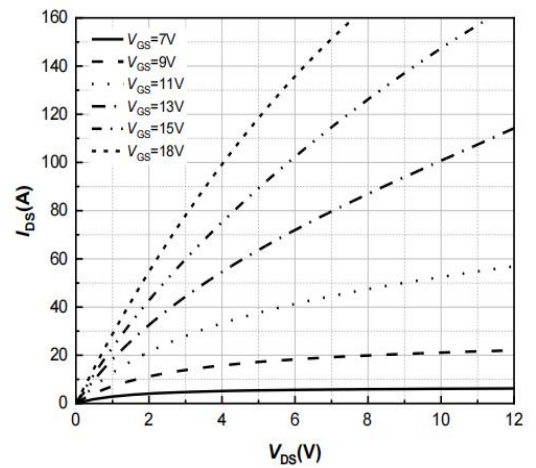


Fig.3 Output Characteristics $T_j = 175^\circ\text{C}$

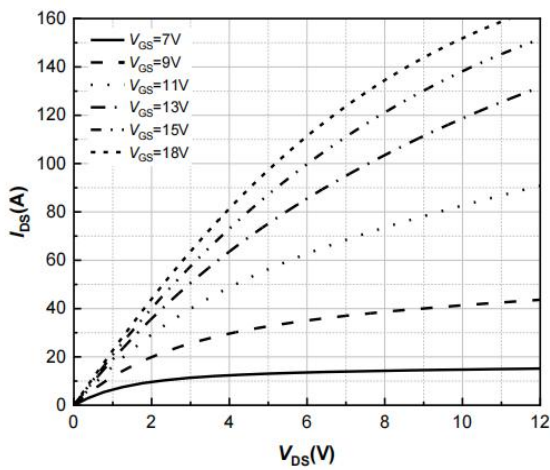


Fig.4 Normalized $R_{DS(on)}$ DS vs. Temperature

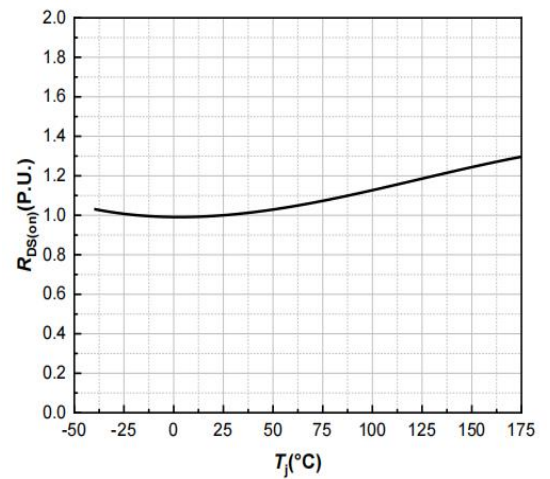


Fig.5 $R_{DS(on)}$ VS I_{DS} (A)

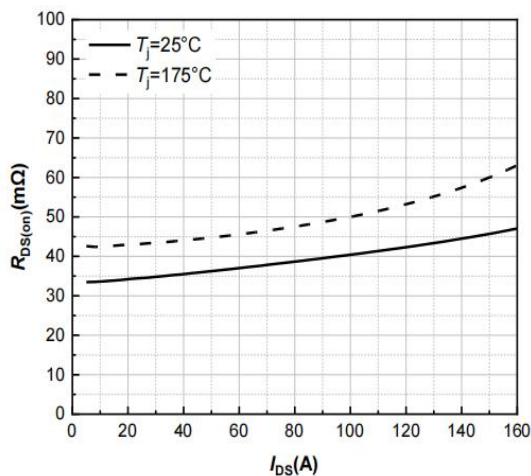


Fig.6 $R_{DS(on)}$ VS T_j ($^\circ\text{C}$)

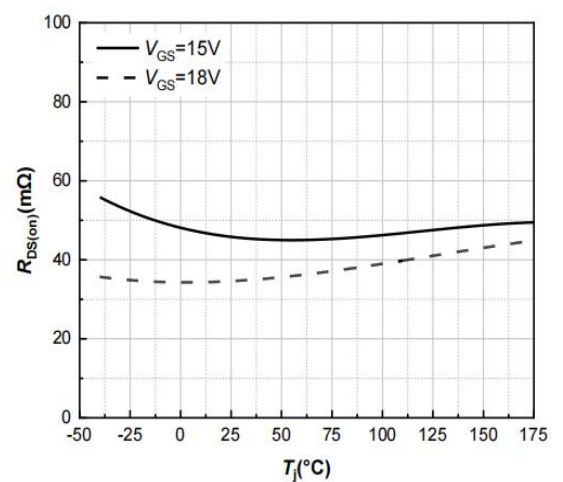




Fig.7 $I_{DS}(A)$ vs V_{GS} $V_{DS}=20V$

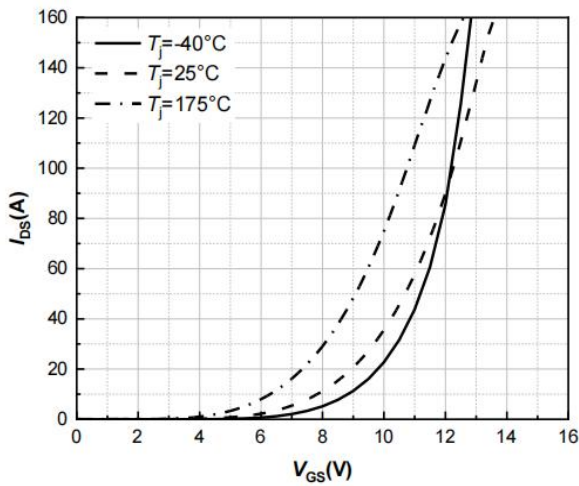


Fig.8 Body Diode Characteristic $T_j = -40^\circ\text{C}$

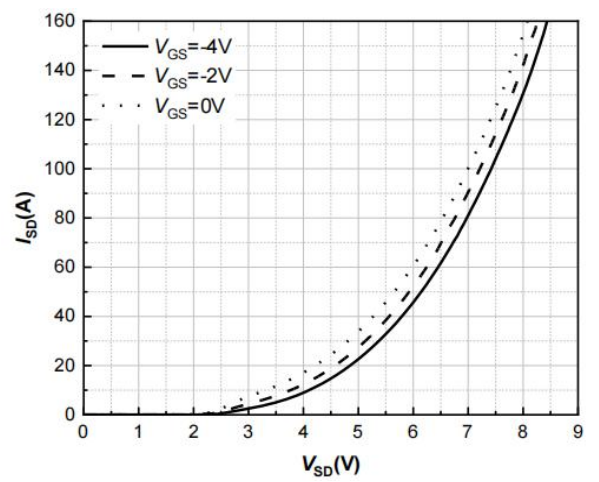


Fig.9 Body Diode Characteristic $T_j = 25^\circ\text{C}$

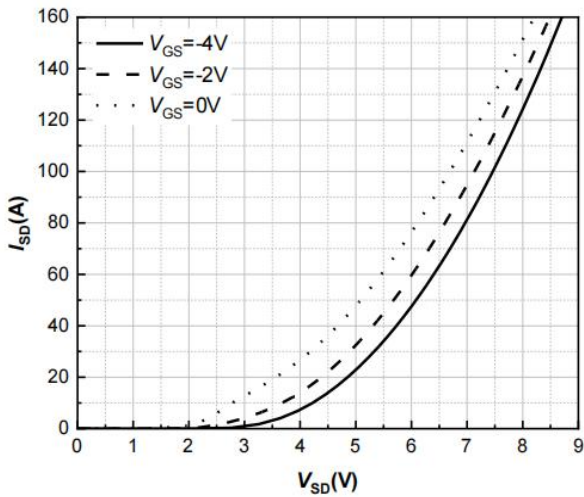


Fig.10 Body Diode Characteristic $T_j = 175^\circ\text{C}$

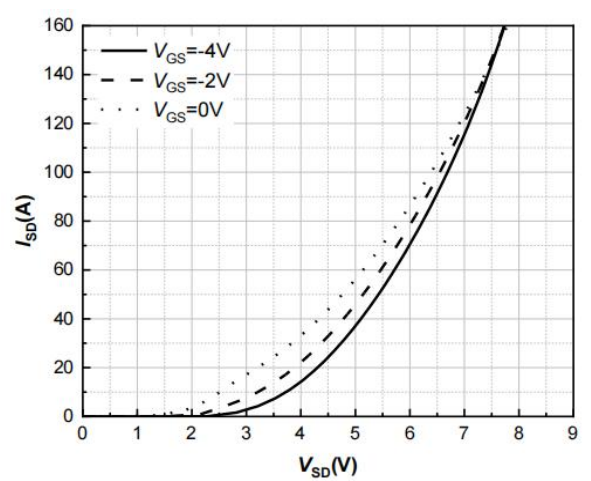


Fig.11 Threshold Voltage vs. Temperature

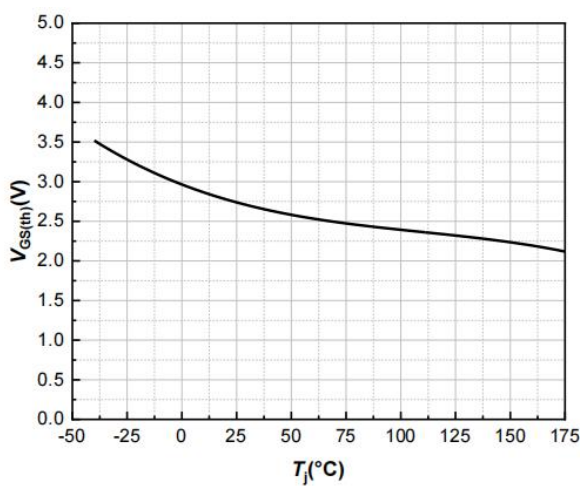


Fig.12 Gate Charge Characteristics

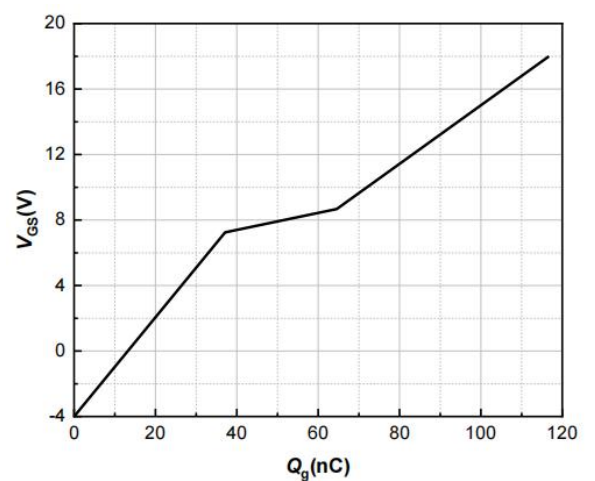




Fig.13 3rd Quadrant Characteristic $T_j = -40^\circ\text{C}$

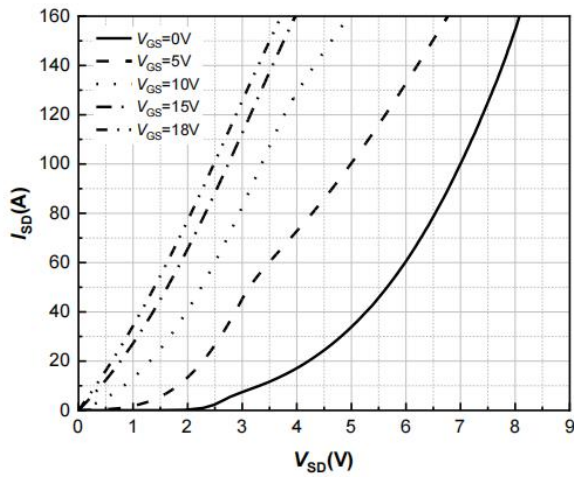


Fig.14. 3rd Quadrant Characteristic $T_j = 25^\circ\text{C}$

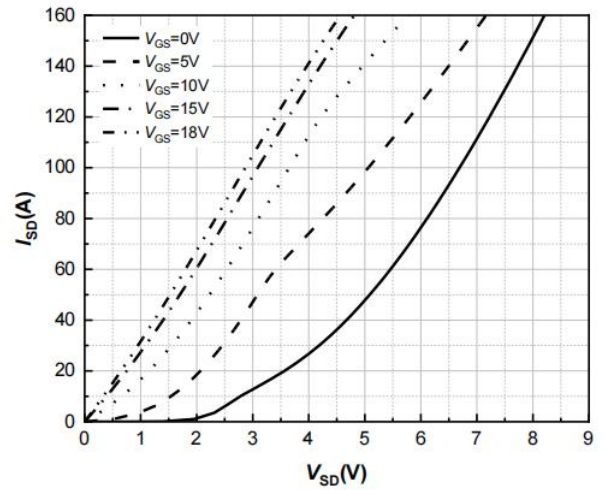


Fig.15 3rd Quadrant Characteristic $T_j = 175^\circ\text{C}$

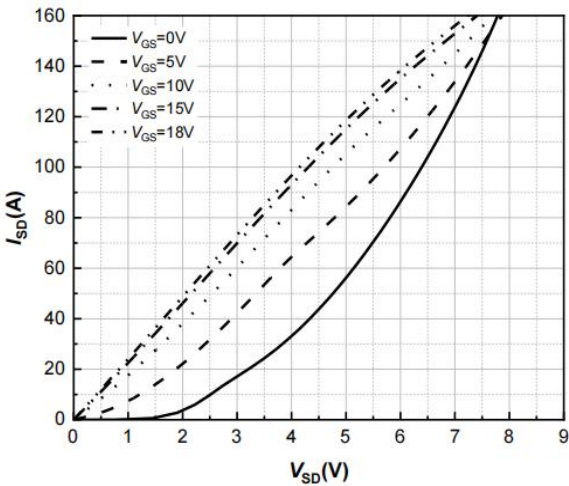


Fig.16 Output Capacitor Stored Energy

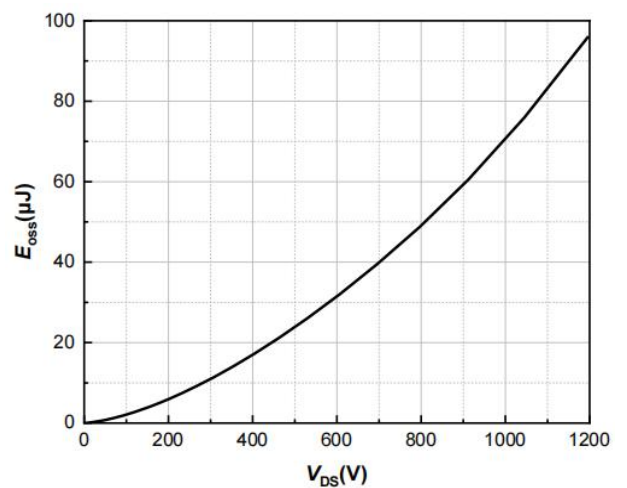


Fig.17 Capacitances vs. Drain-Source

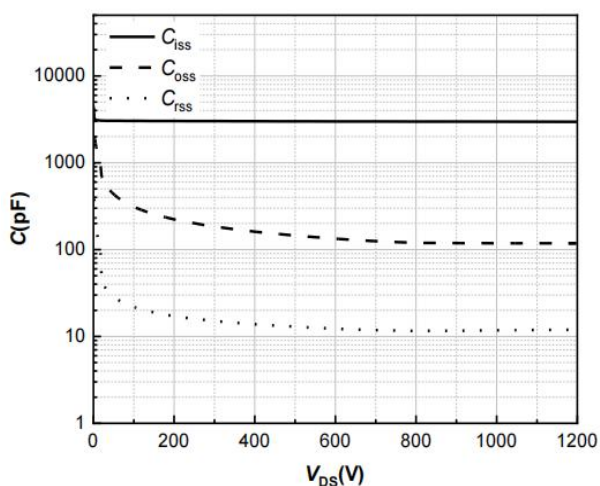


Fig.18 I_{DS} (A) vs. T_c ($^\circ\text{C}$)

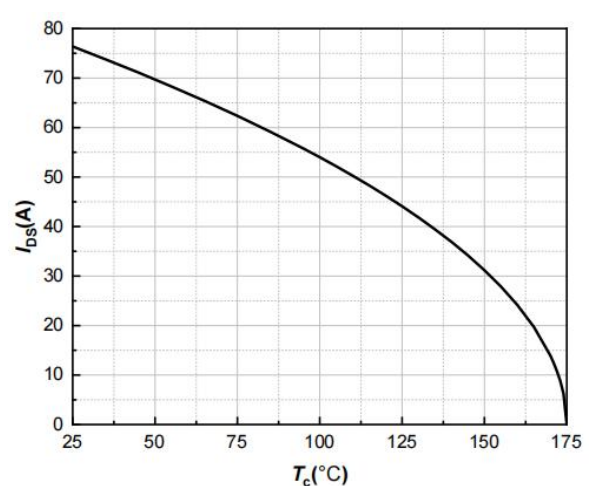




Fig.19 P_{tot} vs $T_c(^{\circ}C)$


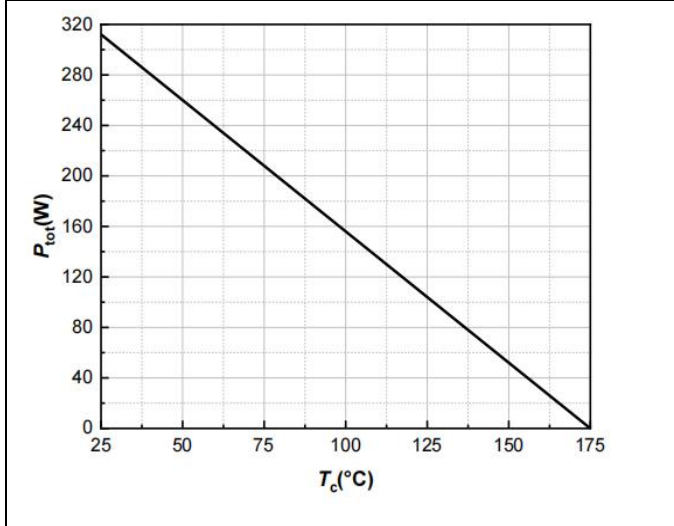


Fig.20 Transient Thermal Impedance




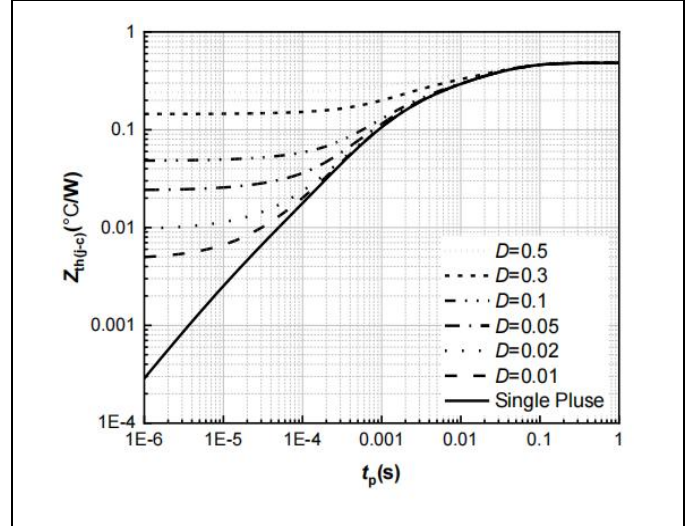

SC037N120J3



1200V 79A N-CHANNEL POWER MOSFET

5.Dimensions

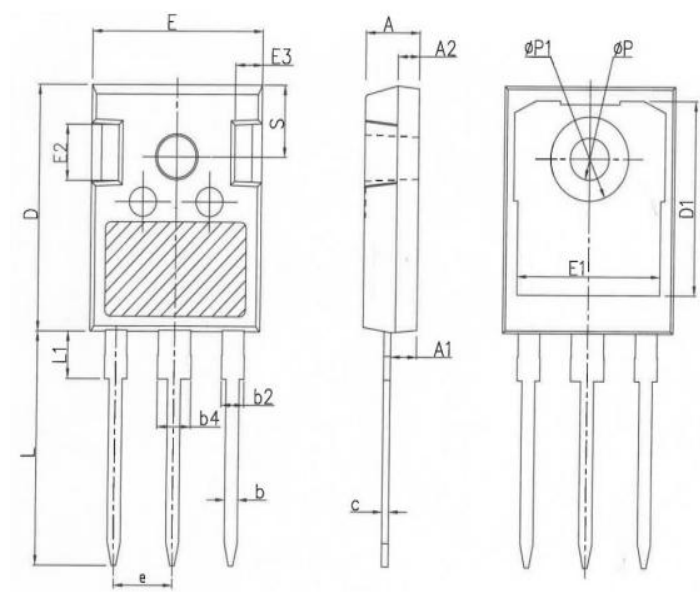

DIM	Unit(inch)		Unit(mm)	
	MIN	MAX	MIN	MAX
A	0.189	0.205	4.80	5.20
A1	0.087	0.102	2.21	2.59
A2	0.073	0.085	1.85	2.15
b	0.044	0.054	1.11	1.36
b2	0.075	0.087	1.91	2.21
b4	0.115	0.126	2.91	3.21
c	0.020	0.030	0.51	0.75
D	0.815	0.839	20.70	21.30
D1	0.640	0.663	16.25	16.85
E	0.610	0.634	15.50	16.10
E1	0.512	0.535	13.00	13.60
E2	0.189	0.205	4.80	5.20
E3	0.091	0.106	2.30	2.70
e	2.54 BSC			
L	0.758	0.796	19.26	20.22
L1	-	0.169	-	4.30
θp	0.134	0.150	3.40	3.80
θp1	-	0.287	-	7.30
S	6.15 BSC			

6. Part Marking System

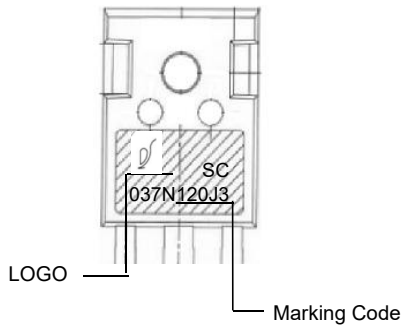

7. Package Information

Package	Packing Type	Quantity(pcs)
TO-247	Tube	25



Important Notice and Disclaimer

- Reproducing and modifying information of the document is prohibited without from XINNUO.
- XINNUO reserves the right to make changes to this document and its products and specifications.
- XINNUO disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- XINNUO does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the here in document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. XINNUO makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown her are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify XINNUO for any damages resulting from such improper use or sale.
- Since XINNUO uses lot number as the tracking base, please provide the lot number for tracking when complaining.