



- Excellent Insertion Loss and Isolation performance
- GPIO Control Interface
- Vdd support 1.6V~4.2V
- Broadband frequency range: 0.1 to 7.125 GHz
- Low insertion loss: 0.80 dB @ 7.125 GHz
- Small package: DFN- 6-1.1 x 0.7 x 0.5mm
- No DC blocking capacitors required
- 1kV HBM ESD Protection on all pins

Product Applications

- 5G multimode cellular tablets and Multi-Mode LTE
- Diversity antenna switching

Product Features

Product Description

The LX1630H is a Silicon On Insulator (SOI) Single Pole, Double Throw (SPDT) antenna switch which require very low insertion loss, high isolation and high linearity performance.

The high linearity performance and low insertion loss for 5G NR, and LTE applications.

The LX1630H is manufactured in a 1.1 x 0.7 x 0.5mm, 6-pin surface mount Duad Flat No-Lead (DFN) package.

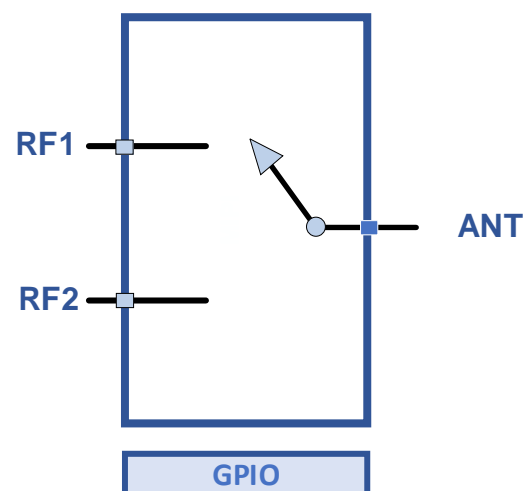


Figure 1 Functional Block Diagram

Absolute Maximum Conditions

Parameters	Symbol	Minimum	Maximum	Units
Supply voltage	V _{DD}	1.6	+4.8	V
Control voltage	V _{CC}	0	+3.0	V
RF input power	P _{in}		+40	dBm
Storage temperature	T _{STG}	-55	+150	°C
Operating temperature	T _{OP}	-40	+90	°C
Human Body Model, Class 1C	ESD	1000		V

1: Test condition 50% duty cycle, VSWR=1:1, +25 ° C

Note: Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.

General Electrical Specifications

Parameters	Symbol	Test Condition	Min.	Typ.	Max.	Units
Supply voltage	V _{DD}		1.6	2.8/1.8	4.2	V
Supply current, active mode	I _{DD}			50	100	μA
Control signal:						
High			1.6	1.8	3.0	V
Low					0.3	
Control current:						
High	I _{CTL}				5	μA
Low						
Turn-on time (PIN = +27 dBm)	T _{ON}	Measured from 50% of final VDD supply voltage to 90% of RF power			10	μs
Switching time (PIN = +27 dBm)	T _{SW}	Measured from 50% of final VDD supply voltage to 90% of RF power		2	3	μs

RF Specifications

Parameters	Symbol	Test Condition	Min.	Typ.	Max.	Units
Operating frequency	f		0.1		7.125	GHz
Insertion loss	IL	Up to 1.0 GHz		0.30	0.35	dB
		Up to 2.0 GHz		0.35	0.45	
		Up to 3.0 GHz		0.40	0.50	
		Up to 4.8 GHz		0.45	0.55	
		Up to 6.0 GHz		0.65	0.75	
		Up to 6.425 GHz		0.75	0.85	
Isolation (ANT port to any receive port)	Iso	Up to 1.0 GHz	32	35		dB
		Up to 2.0 GHz	27	30		
		Up to 3.0 GHz	22	25		
		Up to 4.8 GHz	20	22		
		Up to 6.0 GHz	15	18		
		Up to 6.425 GHz	15	16		
Return loss	RL	All ports, up to 2.7 GHz		20		dB
		All ports, up to 6.0 GHz		16		
		All ports, up to 6.425GHz		15		
		All ports, up to 7.125GHz		15		
2nd Order harmonics	2fo	Pin = +26 dBm,900MHz	-60	-64		dBm
		Pin = +35 dBm,900MHz	-40	-45		
3rd Order harmonics	3fo	Pin = +26 dBm,900MHz	-70	-72		dBm
		Pin = +35 dBm,900MHz	-42	-44		
0.1 dB Compression Point 50% duty cycle, VSWR=1:1	P0.1dB	900M, 50Ω		+40		dBm

Truth Table

VCTL	ANT-RFX
0	ANT-RF1 on
1	ANT-RF2 on

Lingchip Confidential

Pin-out Information

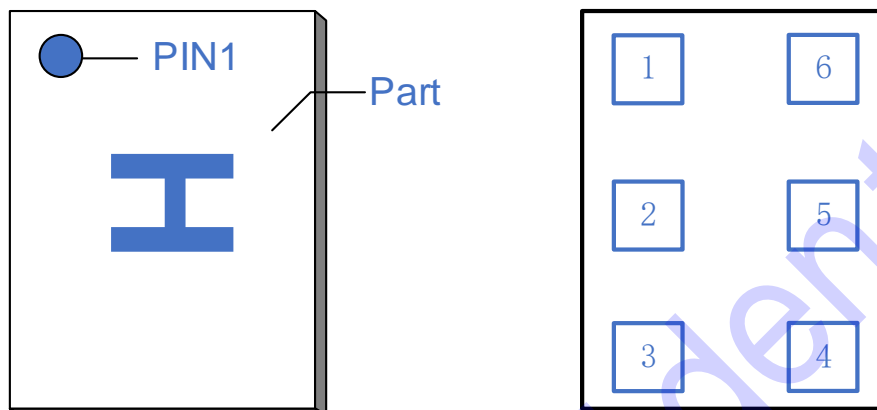


Figure 2 Pin-out Information

Table 1. Pin Description

Pin #	Name	Description	Pin #	Name	Description
1	RF2	RF Port 2	4	VDD	Voltage Supply
2	GND	Ground	5	ANT	Antenna Port
3	RF1	RF Port 1	6	VCTL	Logic Control Voltage

Application circuit

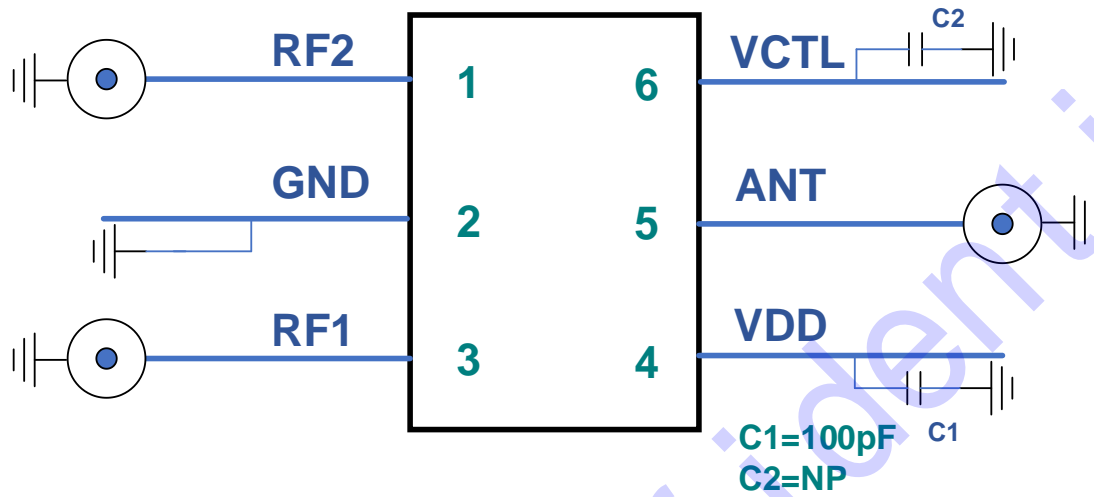


Figure 3 Application circuit

Evaluation Board

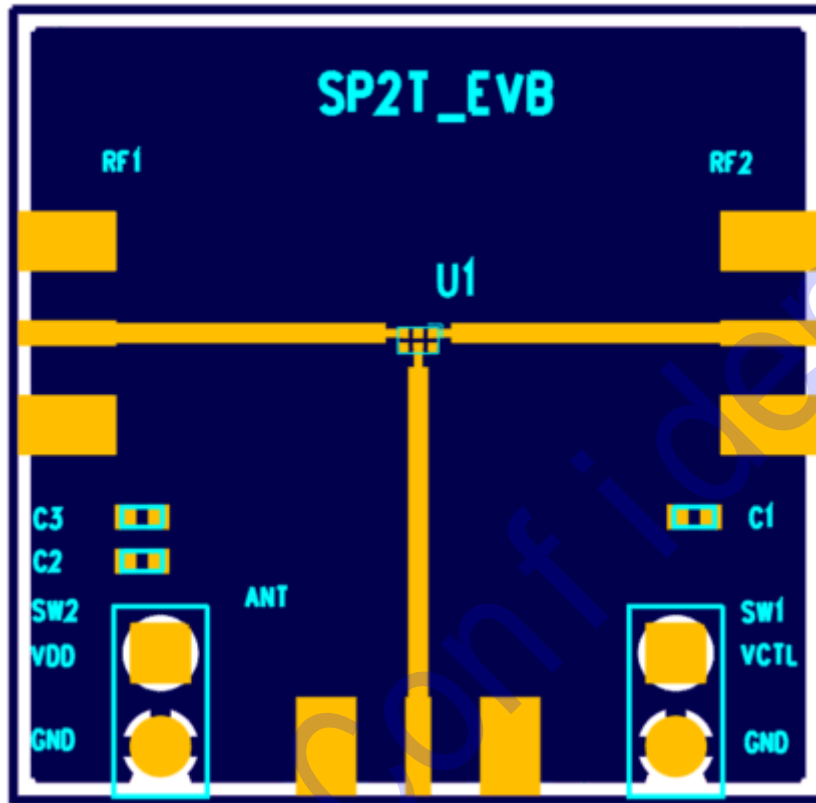


Figure 4 Evaluation Board Assembly Diagram

Package Outline Dimension

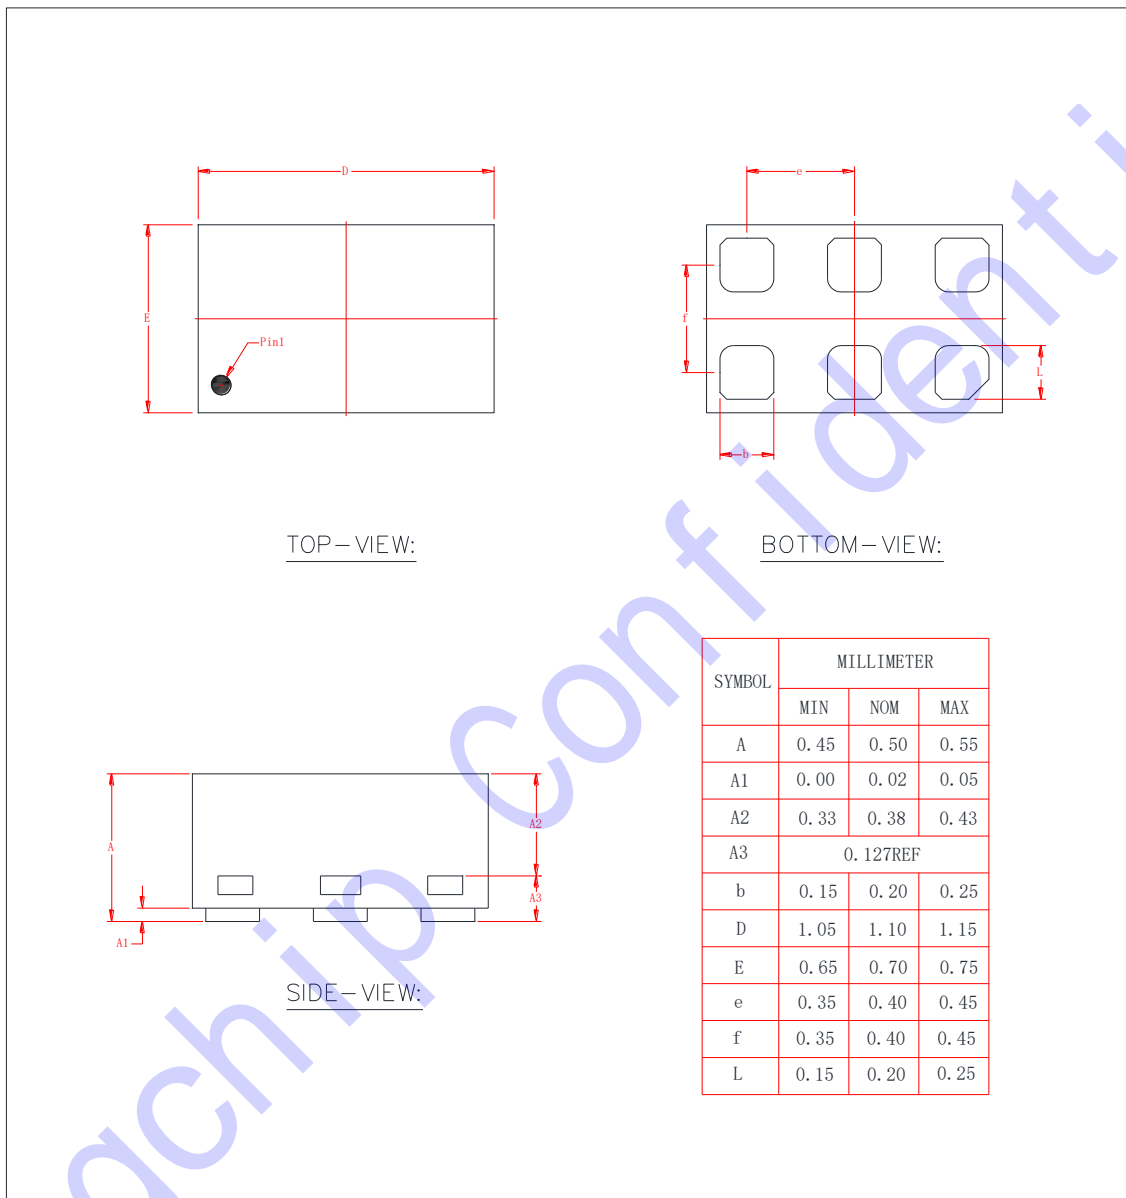


Figure 5 Package Outline Dimension

Package Dimensions (5000pcs)

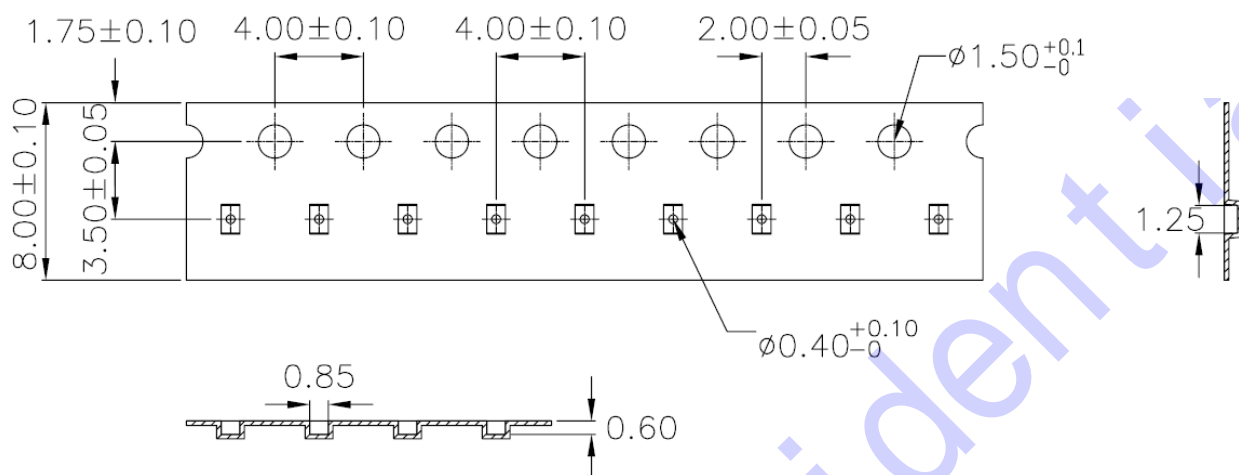


Figure 6 Tape and Reel Dimensions


Declaration of No Harmful Substances

This part is compliant with 2005/20/EC packaging directive, 1907/2006/EC REACH directive and the 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment), as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead free
- Halogen Free (Chlorine, Bromine)
- SVHC Free

Reflow Chart

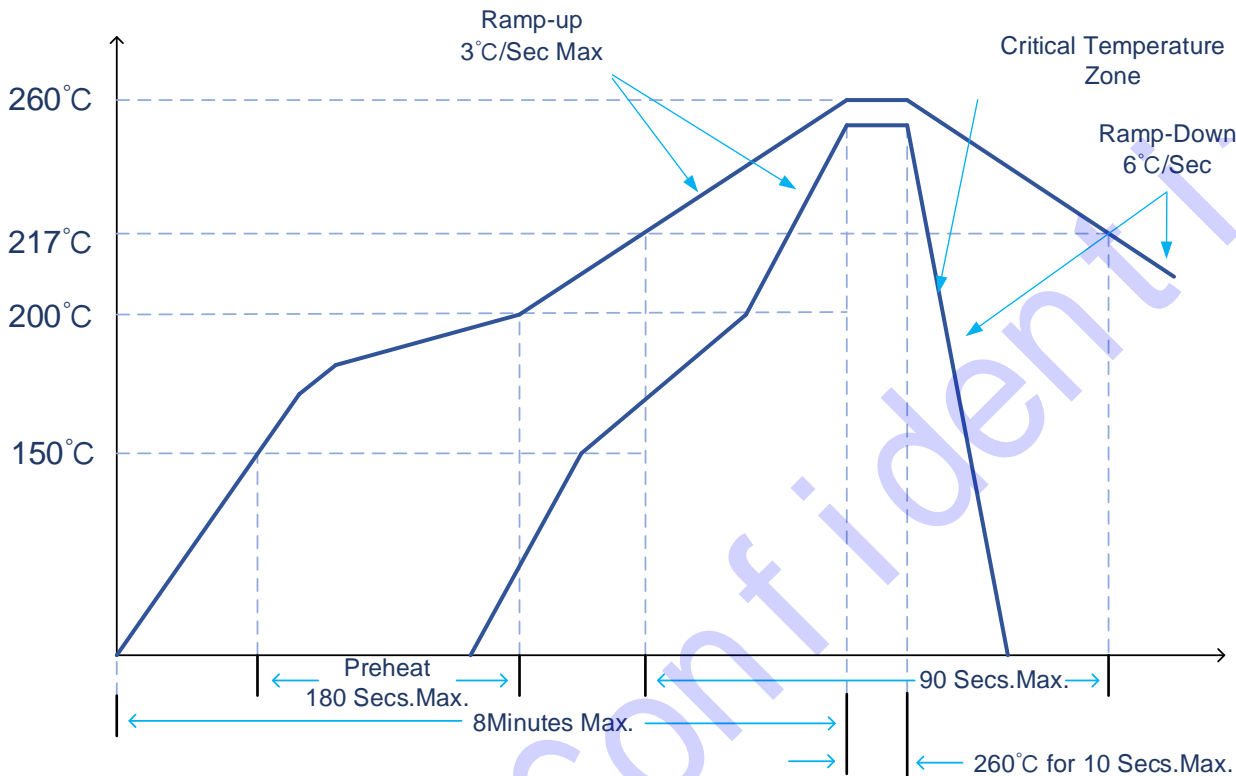

NOTE: Reflow Profile with 240°C peak also acceptable.