

Product Specification

XBLW SN74HC47

BCD-to-Seven-Segment Common anode
LED Decodes/Drivers

WEB | www.xinboleic.com




Description

The SN74HC47 feature active-low outputs designed for driving common-anode LEDs or incandescent indicators directly. Display patterns for BCD input counts above 9 are unique symbols to authenticate input conditions.

Features

- Supply voltage range: 2V to 6V
- Temperature range: -40°C to +125°C
- Packaging information: DIP-16/SOP-16/TSSOP-16

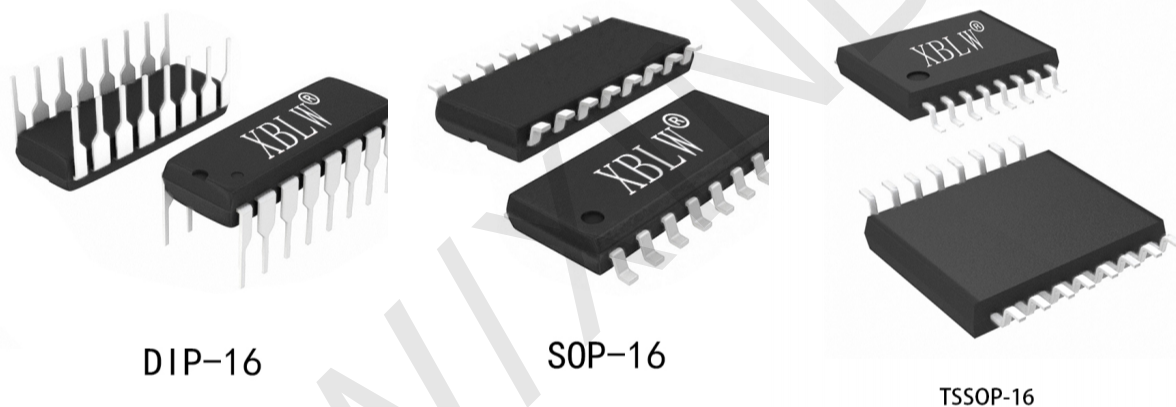

Ordering Information

Product Model	Package Type	Marking	Packing	Packing Qty
XBLW SN74HC47N	DIP-16	74HC47N	Tube	1000Pcs/Box
XBLW SN74HC47DTR	SOP-16	74HC47	Tape	2500Pcs/Reel
XBLW SN74HC47TDTR	TSSOP-16	74HC47	Tape	3000Pcs/Reel

Block Diagram


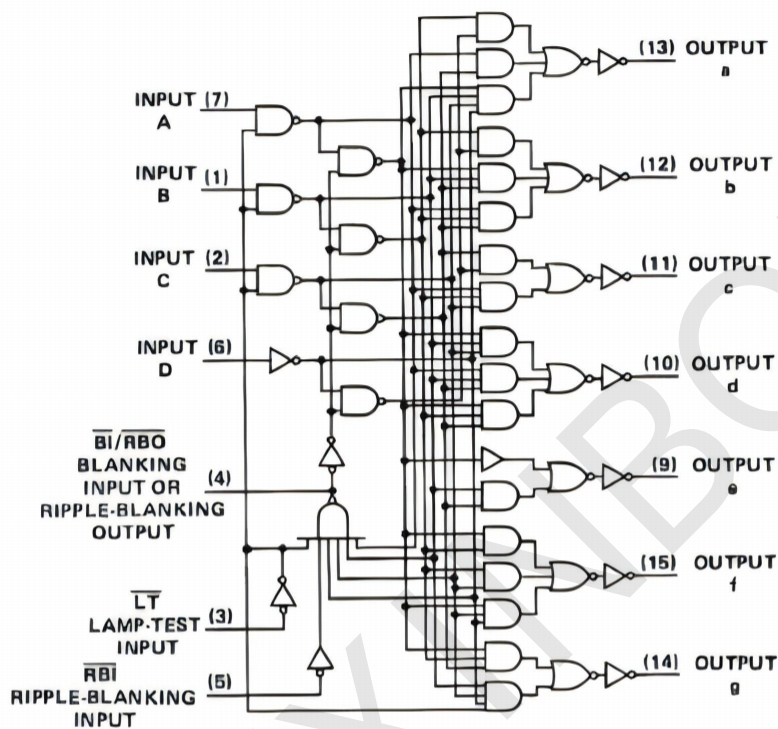


Figure 1.logic symbol

Pin Configurations

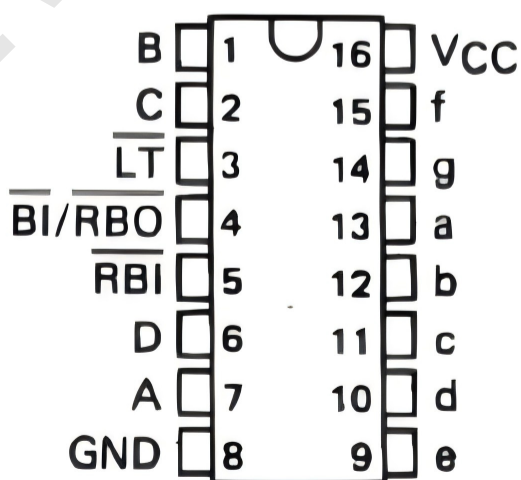

Pin Description

Pin No.	Pin Name	Description
1	B	data input
2	C	data input
3	$\bar{L}T$	lamp test
4	$\bar{B}I/\bar{R}B\bar{O}$	blanking input/ripple blanking output
5	$\bar{R}BI$	ripple blanking input
6	D	data input
7	A	data input
8	GND	ground (0V)
9	e	data output
10	d	data output
11	c	data output
12	b	data output
13	a	data output
14	g	data output
15	f	data output
16	V _{CC}	supply voltage

Function Table

Decimal or function	Input							Output						
	$\overline{\text{LT}}$	$\overline{\text{RBI}}$	D	C	B	A	$\overline{\text{BI/RBO}}$	a	b	c	d	e	f	g
0	H	H	L	L	L	L	H	on	on	on	on	on	on	off
1	H	X	L	L	L	H	H	off	on	on	off	off	off	off
2	H	X	L	L	H	L	H	on	on	off	on	on	off	on
3	H	X	L	L	H	H	H	on	on	on	on	off	off	on
4	H	X	L	H	L	L	H	off	on	on	off	off	on	on
5	H	X	L	H	L	H	H	on	off	on	on	off	on	on
6	H	X	L	H	H	L	H	off	off	on	on	on	on	on
7	H	X	L	H	H	H	H	on	on	on	off	off	off	off
8	H	X	H	L	L	L	H	on	on	on	on	on	on	on
9	H	X	H	L	L	H	H	on	on	on	off	off	on	on
10	H	X	H	L	H	L	H	off	off	off	on	on	off	on
11	H	X	H	L	H	H	H	off	off	on	on	off	off	on
12	H	X	H	H	L	L	H	off	on	off	off	off	on	on
13	H	X	H	H	L	H	H	on	off	off	on	off	on	on
14	H	X	H	H	H	L	H	off	off	off	on	on	on	on
15	H	X	H	H	H	H	H	off	off	off	off	off	off	off
$\overline{\text{BI}}$	X	X	X	X	X	X	L	off	off	off	off	off	off	off
$\overline{\text{RBI}}$	H	L	L	L	L	L	L	off	off	off	off	off	off	off
LT	L	X	X	X	X	X	H	on	on	on	on	on	on	on

Note:

[1] H=HIGH voltage level; L=LOW voltage level; X=don't care.

[2] The blanking input ($\overline{\text{BI}}$) must be open or held at a high logic level when output functions 0 through 15 are desired. The ripple-blanking input (RBI) must be open or high if blanking of a decimal zero is not desired. [3] When a low logic level is applied directly to the blanking input ($\overline{\text{BI}}$), all segment outputs are off regardless of the level of any other input.

[4] When ripple-blanking input (RBI) and inputs A, B, C, D are at a low level with the lamp test input high, all segment outputs go off and the ripple-blanking output ($\overline{\text{RBO}}$) goes to a low level (response condition).

[5] When the blanking input/ripple blanking output ($\overline{\text{BI/RBO}}$) is open or held high and a low is applied to the lamp test input, all segment outputs are on.



Figure 3. Segment identification

Electrical Parameter

Absolute Maximum Ratings

(Voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Max.	Unit
supply voltage	V_{CC}	-	-0.5	+7	V
supply current	I_{CC}	-	-	50	mA
ground current	I_{GND}	-	-50	-	mA
input clamping current	I_{IK}	$V_I < -0.5V$ or $V_I > V_{CC}+0.5V$	-	± 20	mA
output clamping current	I_{OK}	$V_O < -0.5V$ or $V_O > V_{CC}+0.5V$	-	± 20	mA
output current	I_O	$-0.5V < V_O < V_{CC}+0.5V$	-	± 25	mA
storage temperature	T_{stg}	-	-65	+150	°C
soldering temperature	T_L	10s	DIP	245	°C
			SOP/TSSOP	260	

Recommended Operating Conditions

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
supply voltage	V_{CC}	-	2.0	5.0	6.0	V
input voltage	V_I	-	0	-	V_{CC}	V
output voltage	V_O	-	0	-	V_{CC}	V
ambient temperature	T_{amb}	-	-40	-	+125	°C

Electrical Characteristics

DC Characteristics 1

($T_{amb} = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	V _{CC}	Conditions	Min.	Typ.	Max.	Unit
HIGH-level input voltage	V _{IH}	2.0V	-	1.5	1.2	-	V
		4.5V	-	3.15	2.4	-	V
		6.0V	-	4.2	3.2	-	V
LOW-level input voltage	V _{IL}	2.0V	-	-	0.8	0.5	V
		4.5V	-	-	2.1	1.35	V
		6.0V	-	-	2.8	1.8	V
LOW-level output voltage	V _{OL}	2.0V	I _O =20μA	-	0	0.1	V
		4.5V	I _O =20μA	-	0	0.1	V
		6.0V	I _O =20μA	-	0	0.1	V
		4.5V	I _O =4.0mA	-	0.15	0.33	V
		6.0V	I _O =5.2mA	-	0.16	0.33	V
HIGH-level input current	I _{IH}	6.0V	V _I =V _{CC}	-	-	20	μA
LOW-level input current	I _{IL} (A/B/ C/D)	6.0V	V _I = GND	-	-	-20	μA
	I _{IL} ($\bar{\text{BI}}$ / $\bar{\text{RBO}}$ / $\bar{\text{RBI}}/\bar{\text{LT}}$)	6.0V	V _I = GND	-	-	-1.2	mA
supply current	I _{CC}	6.0V	V _I =V _{CC} or GND; I _O =0A	-	-	13	mA

DC Characteristics 2

($T_{amb} = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	V _{CC}	Conditions	Min.	Typ.	Max.	Unit
HIGH-level input voltage	V _{IH}	2.0V	-	1.5	-	-	V
		4.5V	-	3.15	-	-	V
		6.0V	-	4.2	-	-	V
LOW-level input voltage	V _{IL}	2.0V	-	-	-	0.5	V
		4.5V	-	-	-	1.35	V
		6.0V	-	-	-	1.8	V
LOW-level output voltage	V _{OL}	2.0V	I _O =20 μ A	-	-	0.1	V
		4.5V	I _O =20 μ A	-	-	0.1	V
		6.0V	I _O =20 μ A	-	-	0.1	V
		4.5V	I _O =4.0mA	-	-	0.4	V
		6.0V	I _O =5.2mA	-	-	0.4	V
HIGH-level input current	I _{IH}	6.0V	V _I =V _{CC}	-	-	20	μ A
LOW-level input current	I _{IL} (A/B/ C/D)	6.0V	V _I = GND	-	-	-20	μ A
	I _{IL} ($\bar{\text{BI}}$ / $\bar{\text{RBO}}$ / $\bar{\text{RBI}}/\bar{\text{LT}}$)	6.0V	V _I = GND	-	-	-1.2	mA
supply current	I _{CC}	6.0V	V _I =V _{CC} or GND; I _O =0A	-	-	13	mA

AC Characteristics

($T_{amb} = 25^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
Turn-on time	t _{ON}	V _{CC} =5.0V; C _L =15pF; R _L =665 Ω	from A input	-	-	100	ns
			from $\bar{\text{RBI}}$ input, outputs (a-f only)	-	-	100	ns
Turn-offtime	t _{OFF}	V _{CC} =5.0V; C _L =15pF; R _L =665 Ω	from A input	-	-	100	ns
			from $\bar{\text{RBI}}$ input, outputs (a-f only)	-	-	100	ns

Testing Circuit

AC Testing Circuit


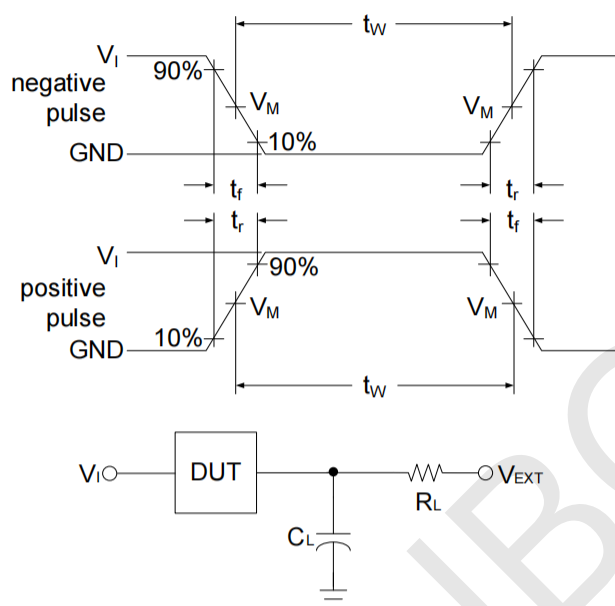


Figure 4. Test circuit for measuring switching times
 C_L includes probe and jig capacitance.

Test Data

Type	Input		Load		V_{EXT}
	V_I	$t_r = t_f$	C_L	R_L	t_{ON}/t_{OFF}
SN74HC47	V_{CC}	3.0ns	15pF	665 Ω	V_{CC}

AC Testing Waveforms

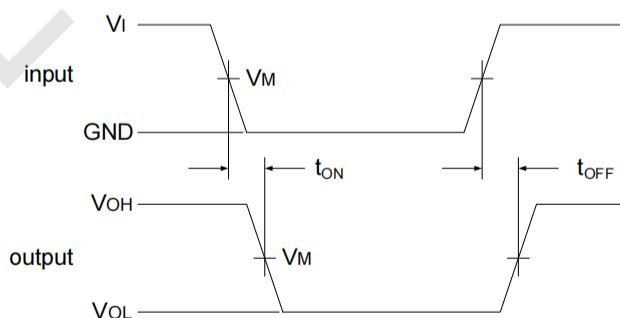


Measurement Points

Type	Input	Output
	V_M	V_M
SN74HC47	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$

Package Information




· DIP-16

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Inches	
	Min(mm)	Max(mm)		Min(in)	Max(in)
A	3.710	4.310	A	0.146	0.170
A1	0.510		A1	0.020	
A2	3.200	3.600	A2	0.126	0.142
B	0.380	0.570	B	0.015	0.022
B1	1.524 (BSC)		B1	0.060 (BSC)	
C	0.204	0.360	C	0.008	0.014
D	18.80	19.20	D	0.740	0.756
E	6.200	6.600	E	0.244	0.260
E1	7.320	7.920	E1	0.288	0.312
e	2.540 (BSC)		e	0.100 (BSC)	
L	3.000	3.600	L	0.118	0.142
E2	8.400	9.000	E2	0.331	0.354

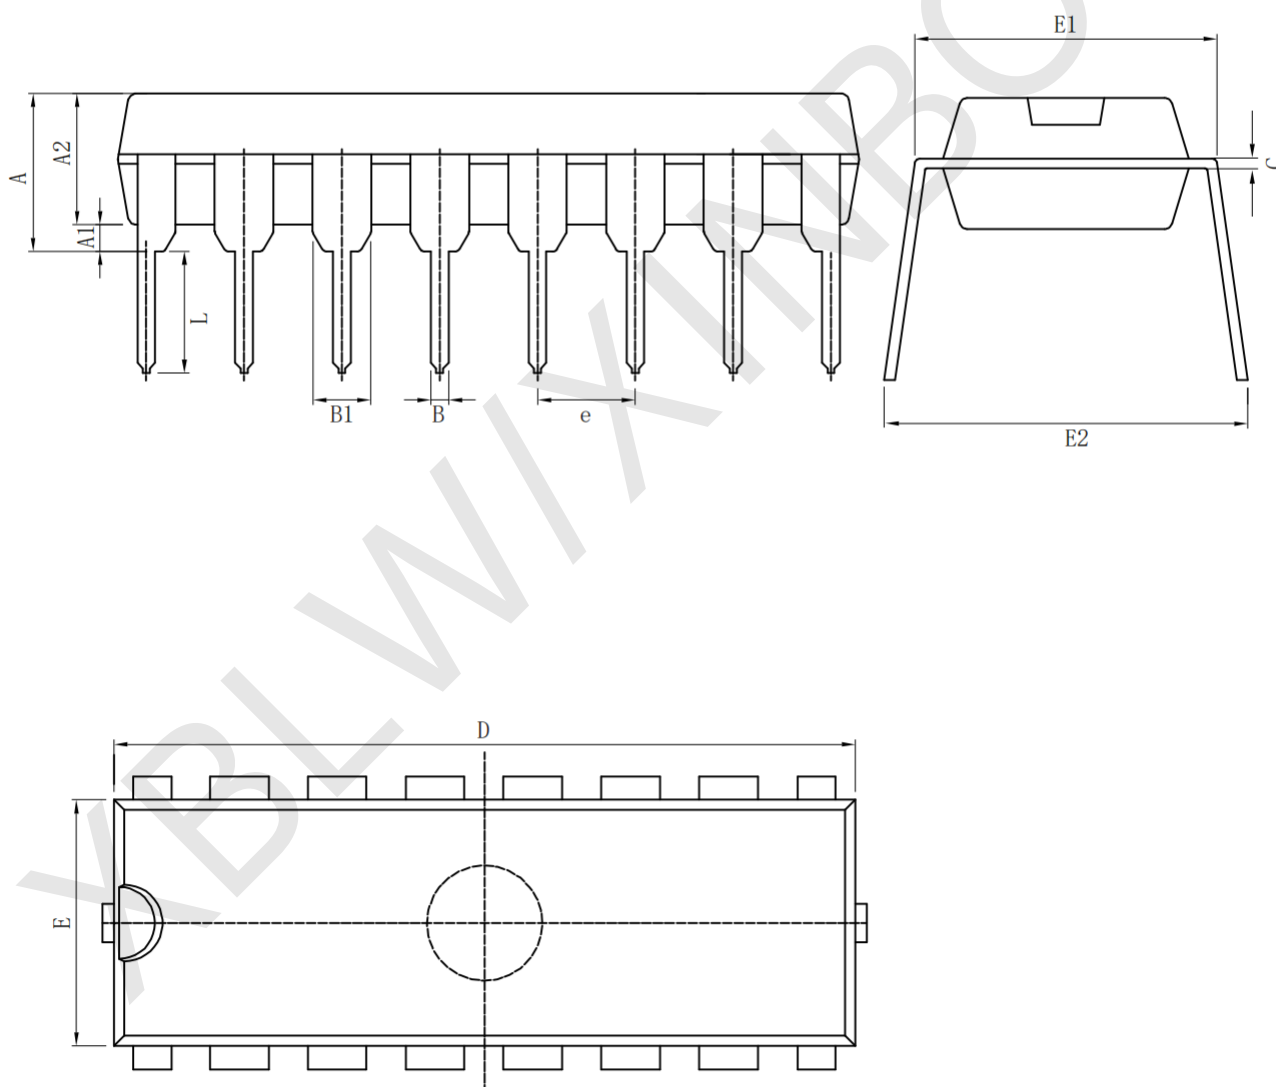


· SOP-16

Size Symbol	Dimensions In Millimeters			Size Symbol	Dimensions In Inches		
	Min (mm)	Nom (mm)	Max (mm)		Min (in)	Nom (in)	Max (in)
A	1.500	1.600	1.700	A	0.059	0.063	0.067
A1	0.100	0.150	0.250	A1	0.004	0.006	0.010
A2	1.400	1.450	1.500	A2	0.055	0.057	0.059
A3	0.600	0.650	0.700	A3	0.024	0.026	0.028
b	0.300	0.400	0.500	b	0.012	0.016	0.020
c	0.150	0.200	0.250	c	0.006	0.008	0.010
D	9.800	9.900	10.00	D	0.386	0.390	0.394
E	5.800	6.000	6.200	E	0.228	0.236	0.244
E1	3.850	3.900	3.950	E1	0.152	0.154	0.156
e	1.27 (BSC)			e	0.050 (BSC)		
L	0.500	0.600	0.700	L	0.020	0.024	0.028
L1	1.05 (BSC)			L1	0.041 (BSC)		
θ	0°	4°	8°	θ	0°	4°	8°

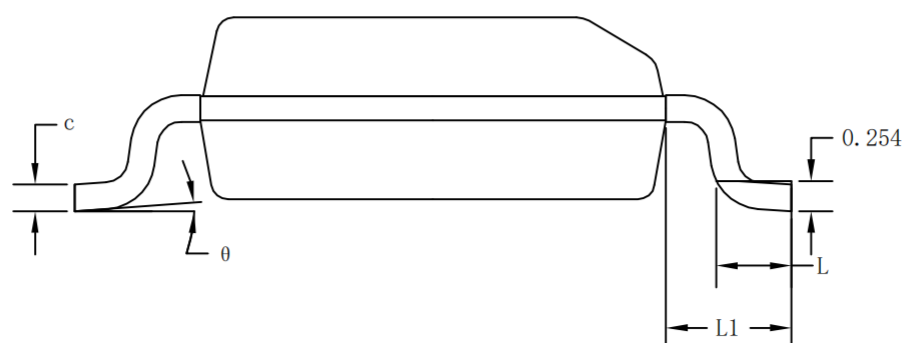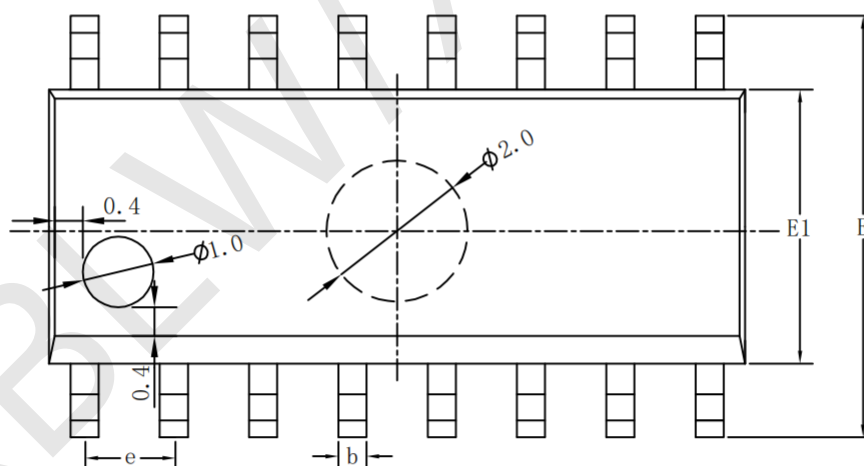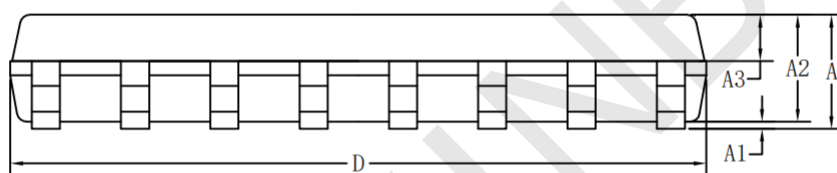

· TSSOP-16

Symbol \ Size	Dimensions In Millimeters		Symbol \ Size	Dimensions In Inches	
	Min (mm)	Max (mm)		Min (in)	Max (in)
A		1.200	A		0.047
A1	0.050	0.150	A1	0.002	0.006
A2	0.800	1.050	A2	0.031	0.041
b	0.190	0.300	b	0.007	0.012
c	0.090	0.200	c	0.004	0.0089
D	4.900	5.100	D	0.193	0.201
E	6.200	6.600	E	0.244	0.260
E1	4.300	4.480	E1	0.169	0.176
e	0.65 (BSC)		e	0.0256 (BSC)	
K	0°	8°	K	0°	8°
L	0.450	0.750	L	0.018	0.030

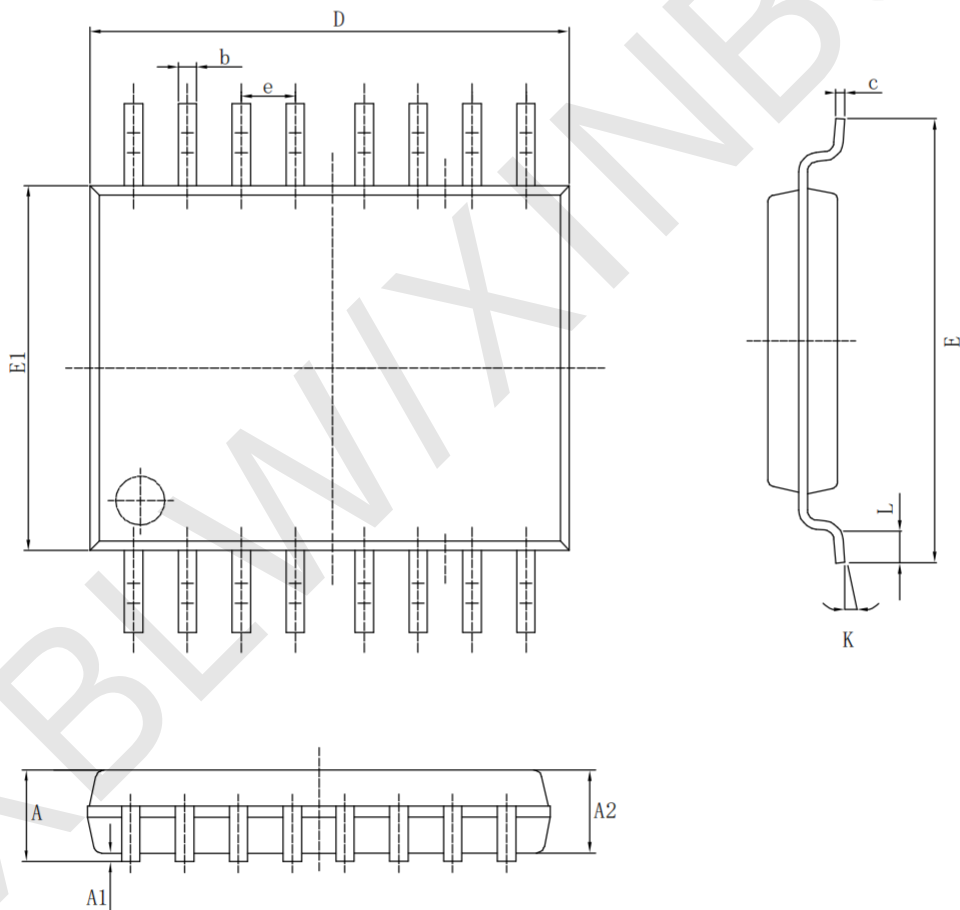

Statement

- XBLW reserves the right to modify the product manual without prior notice! Before placing an order, customers need to confirm whether the obtained information is the latest version and verify the completeness of the relevant information.
- Any semi-guide product is subject to failure or malfunction under specified conditions. It is the buyer's responsibility to comply with safety standards when using XBLW products for system design and whole machine manufacturing. And take the appropriate safety measures to avoid the potential in the risk of loss of personal injury or loss of property situation!
- XBLW product has not been licensed for life support, military and aerospace applications, and therefore XBLW is not responsible for any consequences arising from its use in these areas.
- If any or all XBLW products (including technical data, services) described or contained in this document are subject to any applicable local export control laws and regulations, they may not be exported without an export license from the relevant authorities in accordance with such laws.
- The specifications of any and all XBLW products described or contained in this document specify the performance, characteristics, and functionality of said products in their standalone state, but do not guarantee the performance, characteristics, and functionality of said products installed in Customer's products or equipment. In order to verify symptoms and conditions that cannot be evaluated in a standalone device, the Customer should ultimately evaluate and test the device installed in the Customer's product device.
- XBLW documentation is only allowed to be copied without any alteration of the content and with the relevant authorization. XBLW assumes no responsibility or liability for altered documents.
- XBLW is committed to becoming the preferred semiconductor brand for customers, and XBLW will strive to provide customers with better performance and better quality products