零件承认书



SPECIFICATION FOR APPROVAL

客户名称:	0110

规格描述: ZECD75 10UH ± 10% 双线

日 期: 2023/10/10

增益签核:

制订	审核	核准
夏琳	陈雨	李万

客户签核:

工程	审核	核准




	市增	44	11 ←	-/ 7	コバロ	=
4-		23 31	: XII/		┌ ╏╱ ╱ ╲	- 1
	コリンロ	$\Pi\Pi \rightarrow$	יווי 🛨	~ H 141	<i>Y</i> /\	\mapsto \Box

地址: 东莞市塘厦镇林村塘厦大道北552号

电话: 0769-87321000 传真: 0769-87891229

物料类型:	CD电感
日期:	2023/10/10
版 本:	A

1、外形尺寸 Dimension:

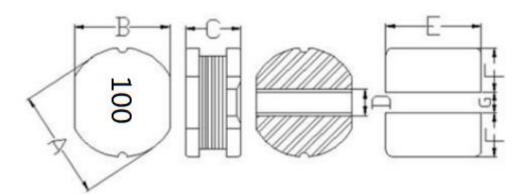

单位Unit: mm

A	7.8±0.3
В	7.0±0.3
C	5.0±0.3
D	2.4Ref.
E	7.5Ref.
F	3.0Ref.
G	2.4Ref.

2、产品品名构成 Product Spec. Model

 $\mathop{\sf ZECD75}_{\sf A} \mathop{\mathsf{SX-10UH/K}}_{\sf B} \mathop{\mathsf{C}}_{\sf D}$

A: 系列名称Seriesname

产品尺寸Productdimensions (AxBxC)

B: 绕组, SX 双线

C:电感值InductanceValue

D:精度,±10%

3、结构Structure



4、材料清单MATERIAL LIST

NO.	PARTS	MATERIAL SPECIFICATIONS	UL FILE NO.	TEMP. CLASS
1	CORE	TW40 CDR7.8*5.0*3.5R OR EQUIVALENT	NA	NA
2	WIRE	G1 P180 OR EQUIVALENT	E258243	180℃
3	SOLDER	Sn99.3-Cu0.7 OR EQUIVALENT	NA	NA

^{*}NA:NOT APPLICABLE.

5、电性能参数表 Electrical Characteristics List

7、七日ルラ奴牧1		测试频率	直流电阻			
规格型号 Part NO.	电感量 Tolerance(uH)	Took Enga	DCR (mΩ)Max.	饱和电流 Isat (A)	线径WIRE (φ/mm)	圈数TS (Ref)
ZECD75SX-10UH/K	10	100 / 0.25	56	4.30	0.27*2	16.5

[※]公差Tolerance: N:±30%、M:±20%、K:±10%.


Isat 电流:指使电感量比初始值下降10%Max(The rated DC current is that which cause at 10%Max inductance reduction from the initial value)。

[※]工作温度Operating temperature rang: -40 $^{\circ}$ C to +105 $^{\circ}$ C (Including Self-heating)

[※]储存温度Storage termperature rang: -40 ℃ to +125℃


6、产品包装 Packaging

1) 载带包装示意图 Tape packing diagram

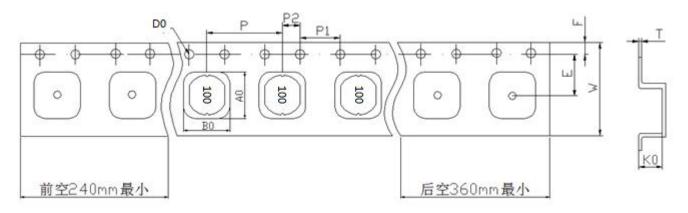


ITEM	W	A0	В0	K0	P	Е	F	D0	Р0	P2	Т
DIM	16.00	8.20	7.50	5.40	12.00	7.50	1.75	1.50	4.00	2.00	0.40
TOLE	±0.3	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	+0.1	±0.1	±0.1	±0.05

2)卷盘包装示意图 Tape packing diagram

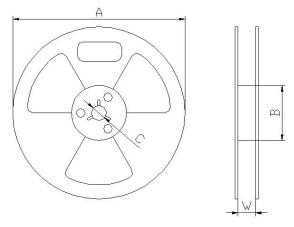

Α	330±0.5
В	100±0.5
С	13.5±0.5
W	16.5±0.5


3) 卷盘包装示意图 Tape packing diagram

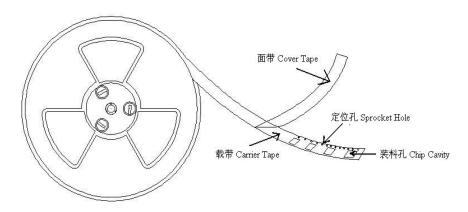


4)剥离强度要求Peeling required

①F 力大小: 20~100g;

②面带剥离角度: 165°~180°。

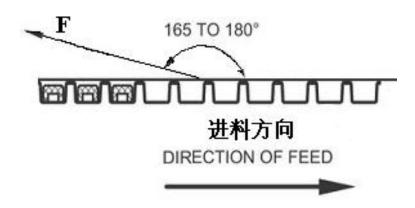


5) 包装数量 Packing quantity

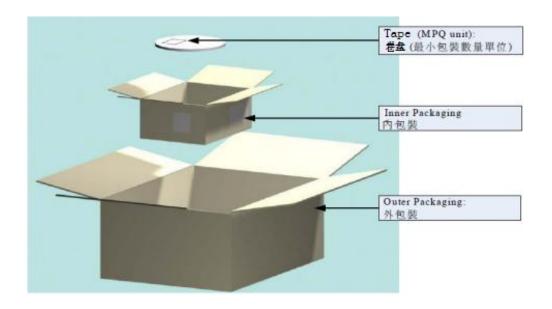

项目 (Project)	数量(PCS)	尺寸规格(Size:mm)
盘(Reel)	1000	13"
内盒 (Inner box)	3000	340mm*340mm*65mm
外箱 (Out box)	9000	360mm*360mm*235mm

	YTEST METHOD	
MECHANICA	,L	T
TESTITEM	SPECIFICATION	TEST DETAILS
Substrate bendi	∟/Lo≦±5%	The sample shall be soldered onto the printed circuit board
		in figure 1 and a load applied unitil the figure in the arrow
	There shall be	direction is made approximately 3mm.(keep time 30 seconds)
	no mechanical	PCB dimension shall the page 7/9
	damage or elec-	F(Pressurization)
	trical damege.	
		PRESSURE ROD figure-1
Vibration	△L/Lo≦±5%	The sample shall be soldered onto the printed circuit board
		and when a vibration having an amplitude of 1.52mm
	There shall be	and a frequency of from 10 to 55Hz/1 minute repeated should
	no mechanical	be applied to the 3 directions (X,Y,Z) for 2 hours each.
	damage.	(A total of 6 hours)
Solderability	New solder	Flux (rosin, isopropyl alcohol{JIS-K-1522}) shall be coated
-	More than 90%	over the whole of the sample before hard, the sample shall
		then be preheated for about 2 minutes in a temperature of
		130 \sim 150 $^{\circ}$ and after it has been immersed to a depth 0.5mm
		below for 3±0.2 seconds fully in molten solder M705 with
		a temperature of 245±2°C.
		More than 90% of the electrode sections shall be couered
		with new solder smoothly when the sample is taken out of
		the solder bath.

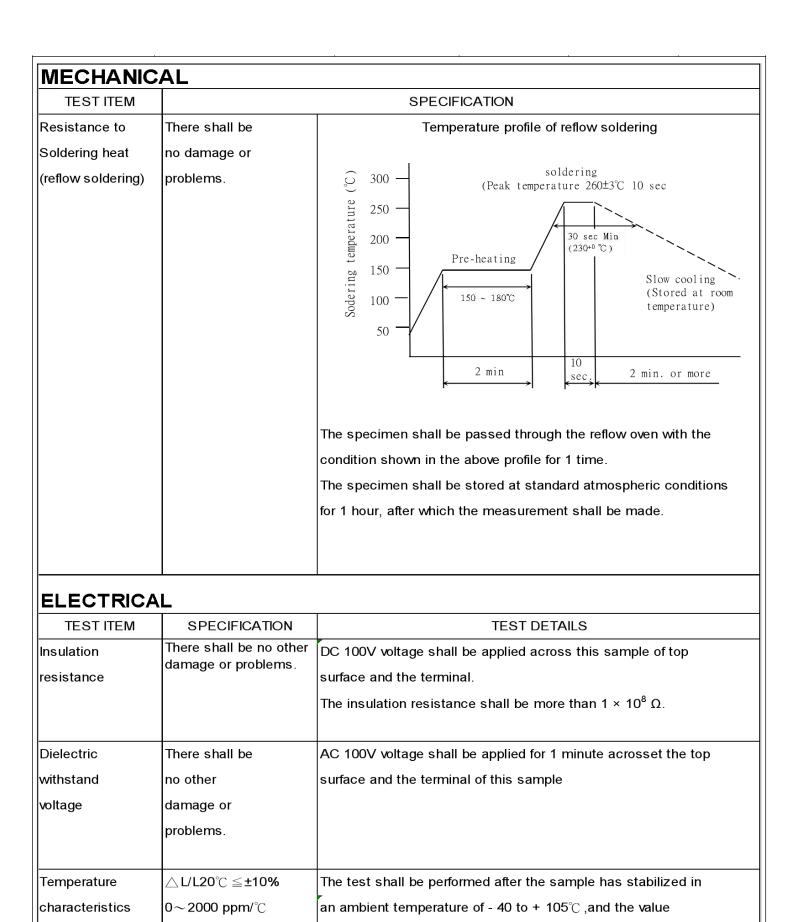

calculated based on the value applicable in a normal

temperature and narmal humidity shall be $\triangle L/L$ 20°C \leq ± 10%.

TEST ITEM	SPECIFICATION					
High temperature	△L/Lo≦±5%	The sample shall be left for 500hours in an atmospere with				
storage		a temperature of 125±2°C and a normal humidity.				
	There shall be	Upon completion of the measurement shall be made after the				
	no mechanical	sample has been left in a normal temperature and normal				
	damage.	humidity for 1 hour.				
Low temperature	△L/Lo≦±5%	The sample shall be left for 500 hours in an atmosphere with				
storage		a temperature of -40±3℃.				
	There shall be	Upon completion of the test, the measurement shall be made				
	no mechanical	after the sample has been left in a normal temperature and				
	damage.	normal h	normal humidity for 1 hour.			
Change of	△L/Lo≦±5%	The sample shall be subject to 5 continuos cycles, such as shown				
temperature		in the table 2 below and then it shall be subjected to standard				
	There shall be	stmospheric conditions for 1 hour, after which measurement				
	no other dama-	shall be made.				
	ge of problems					
			table 2			
				Temperature	Duration	
			1	−40 ±3 °C	10 min.	
				(Themostat No.1)		
			2	Standard	5 sec. or less	
				atmospheric	No.1→No.2	
			3	125±2℃	30 min.	
				(Themostat No.2)		
			4	Standard	5 sec. or less	
				atmospheric	No.2→No.1	
Moisuture storage	△L/Lo≦±5%	The sam	The sample shall be left for 500 hours in a temperature of			
		40±2°C a	$ 40\pm2^{\circ}\text{C} $ and a humidity(RH) of 90 \sim 95%.			
	There shall be	Upon co	Upon completion of the test, the measurement shall be made			
	There shall be	1-1	after the sample has been left in a normal temperature and			
	no mechanical	'	sampl	e has been left in a norma	I temperature and	

The sample shall be reflow soldered onto the printed circuit board in every test.

8、注意事项 Note

①本承认书保证我司产品作为一个单体时的质量情况。当我司产品被安装到贵司产品上时,请保证 贵司的产品已根据贵司的规范进行了有效评估和确认。

This product specification guarantees the quality of our product as a single unit. Please make sure that your product is evaluated and confirmed against your specifications when our product is mounted to your product.

②如果贵司对我司产品的使用已超过了本承认书所界定的产品功能,那么对于由此引发的失效, 我司将不予保证。

We cannot warrant against failure caused by any use of our product that deviates from the intended use as described in this product specification.

- ③为了保持终端电极的焊接性,并使包装材料保持良好状态,必须控制储存区的温度和湿度。
 To maintain the solderabilty of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.
 - ※建议的条件: -10~+40℃, 30~70%RH。

Recommended conditions: $-10^{\circ} + 40^{\circ}$ C, $30 \sim 70\%$ RH.

※储存超过六个月的,应在实际使用前进行焊接检验。
In case of storage over 6 months, soldrability shall be checked before actual usage.

※即使在理想的储存条件下,产品的可焊性也随着时间的推移而降低。因此,产品应从交货时算起, 建议8个月之内使用完。

Even under ideal storage conditions, the weldability of the product decreases over time. therefore, the product should be From the time of delivery, it is recommended that it be used within 8 months

④本承认书在客户收到30天之内,必须签章返回,逾期视为默认。

The Specification Approval should be sent back to the supplier with customer's chop on it within 30 days after receiving it, or we will take it as approved by customer's automatically.

⑤如有特殊规格要求,请事前联络我司技术部人员。
In case of special specifications please contact our technical department prior staff.