


Description

The L7815CV-Y three-terminal positive regulators are available in the TO-220 package with 15V fixed output voltages making it useful in a wide range of applications.


TO-220

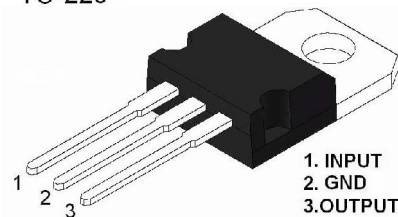

Features

- Output Current up to 1.0A
- Output Voltages of 15V
- Thermal Overload Protection Short Circuit Protection
- Output Transistor Safe Operating area (SOA)Protection

Internal Block Diagram

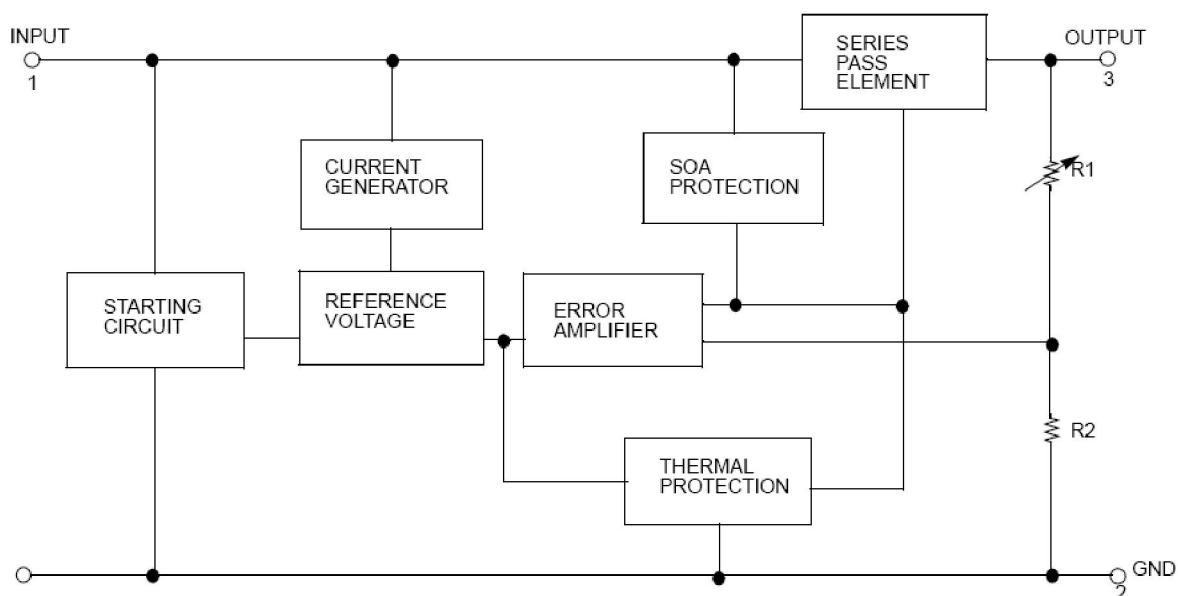

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Input Voltage	V_{IN}	35	V
Output Current	I_{OUT}	1.0	A
Thermal Resistance Junction-Case	$R_{\theta JC}$	5	$^{\circ}C/W$
Thermal Resistance Junction-Air ($T_a = +25^{\circ}C$)	$R_{\theta JA}$	65	$^{\circ}C/W$
Operating Junction Temperature Range	T_{OPR}	0~150	$^{\circ}C$
Storage Temperature Range	T_{STG}	-55~+150	$^{\circ}C$

Electrical Characteristics

(Refer to the test circuits, $0 < T_j < +125^{\circ}\text{C}$, $I_o=500\text{mA}$, $V_i=19\text{V}$, unless otherwise specified, $C_i = 0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$)

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Output Voltage	V_o	$T_j=25^{\circ}\text{C}$, $I_o=5\text{mA}\sim 1.0\text{A}$	11.52	12.00	12.48	V
		$V_i=17.5\text{V}\sim 30\text{V}$, $I_o=5\text{mA}\sim 1.0\text{A}$, $P_D\leq 15\text{W}$	11.40	12.00	12.60	V
Line Regulation(Note)	ΔV_o	$T_j=25^{\circ}\text{C}$			240	mV
					120	
Load Regulation(Note)	ΔV_o	$T_j=25^{\circ}\text{C}$			240	mV
					120	
Quiescent Current	I_Q	$T_j=25^{\circ}\text{C}$			8.0	mA
Quiescent Current Change	ΔI_Q	$V_i=17.5\text{V}\sim 30\text{V}$			1.0	mA
		$I_o=5\text{mA}\sim 1.0\text{A}$			0.5	
Output Noise Voltage	V_N	$f=10\text{HZ}\sim 100\text{KHZ}$		75		$\mu\text{V}/V_o$
Output Voltage Drift	$\Delta V / \Delta T$	$I_o=5\text{mA}$		-1.0		$\text{mV}/^{\circ}\text{C}$
Ripple Rejection	RR	$V_i=18.5\text{V}\sim 28.5\text{V}$, $f=120\text{Hz}$		70		dB
Short Circuit Current	I_{SC}	$V_i=35\text{V}$, $T_A=25^{\circ}\text{C}$		230		mA
Peak Current	I_{PK}	$T_j=25^{\circ}\text{C}$		1.5		A
Dropout Voltage	V_D	$I_o=1.0\text{A}$, $T_j=25^{\circ}\text{C}$		2.0		V

Notes:

Load and line regulation are specified at constant junction temperature. Change in V_o due to heating effects must be taken into account separately. Pulse testing with low duty is used.

Typical Applications

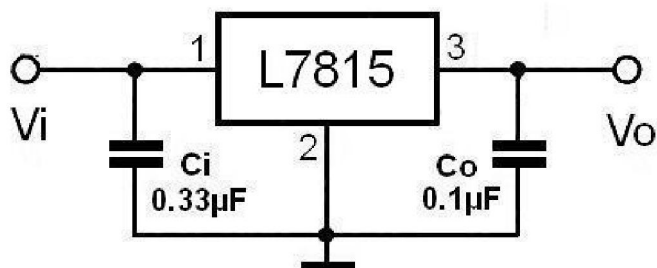


Figure 1. DC Parameters

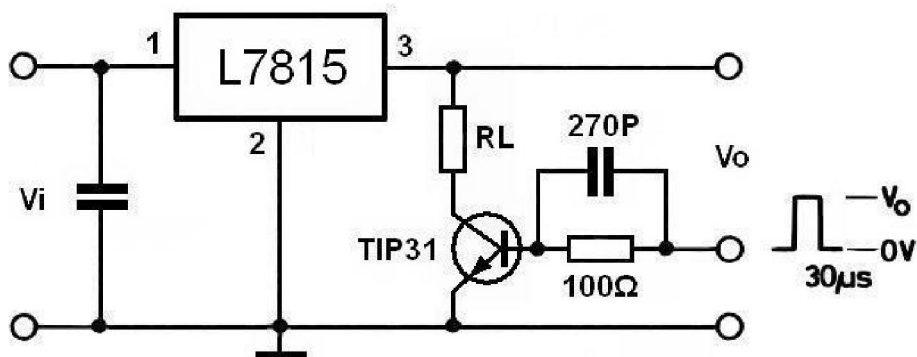


Figure 2. Load Regulation

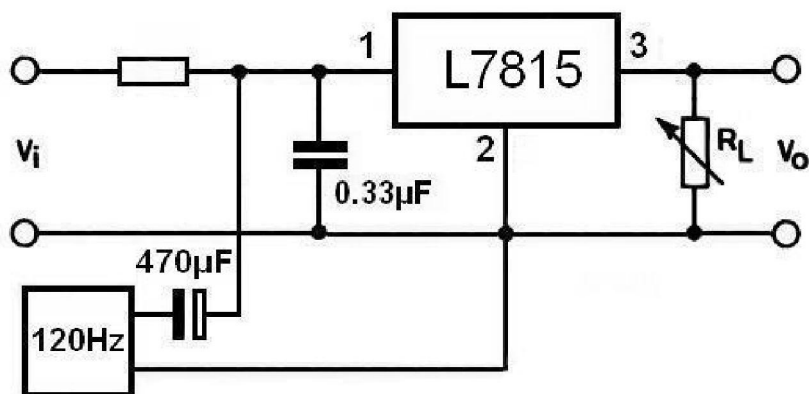


Figure 3. Ripple Rejection

Typical Performance Characteristics



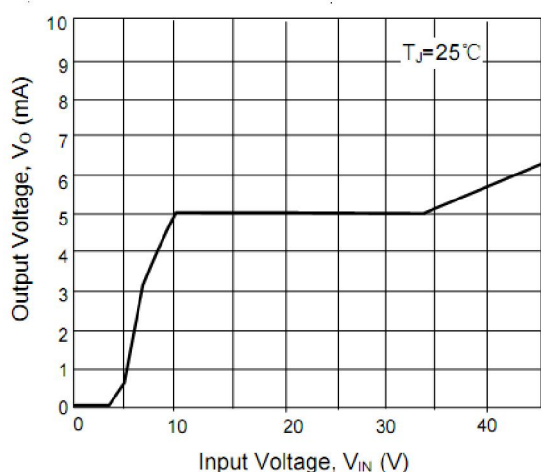



Figure 1. Output Voltage vs. Input Voltage

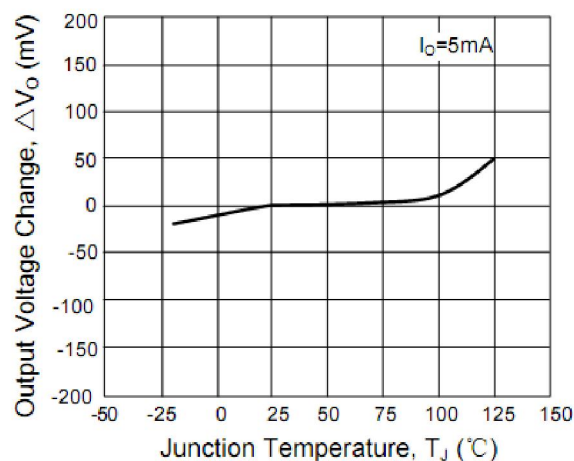


Output Voltage Change vs. Junction Temperature

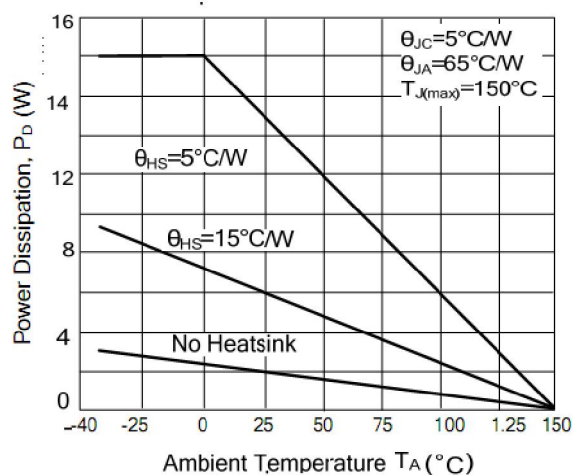


Peak Output Current

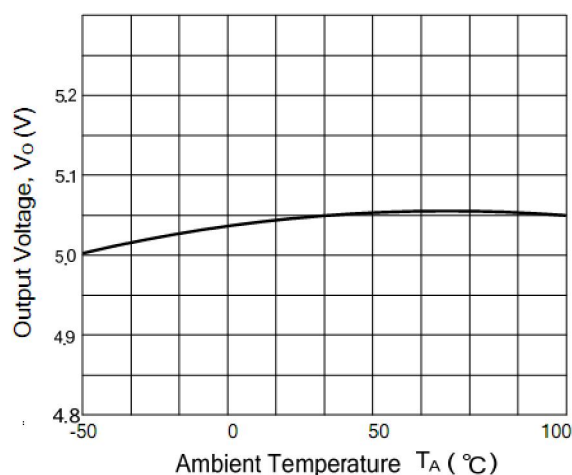

Output Voltage vs. Ambient Temperature

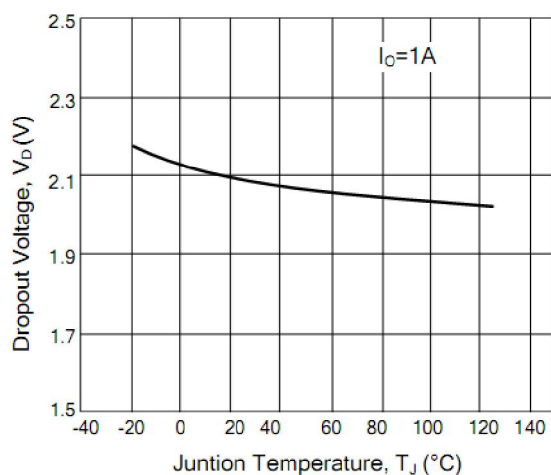


Dropout Voltage vs. Junction Temperature

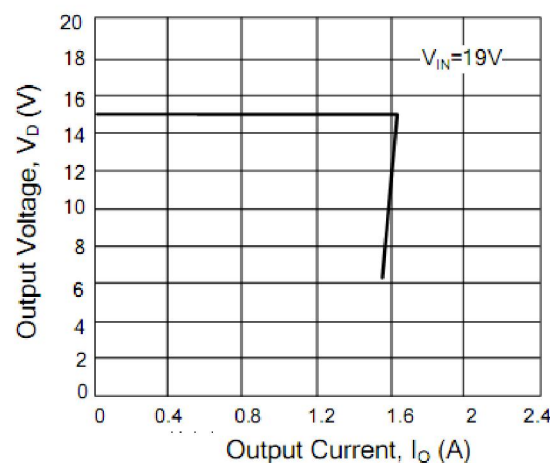

Output Voltage vs. Output Current

Package Dimensions

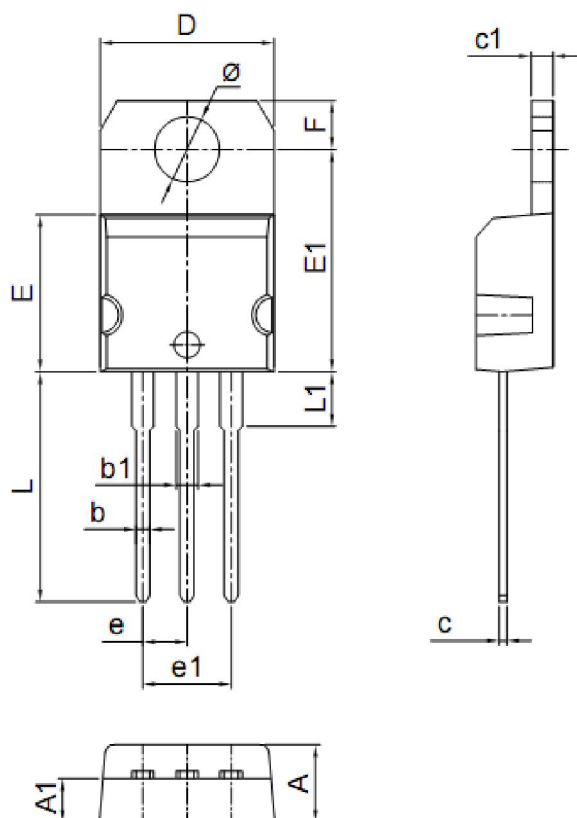

Symbol	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.30	4.70	0.171	0.184
A1	2.52	2.82	0.099	0.111
b	0.71	0.91	0.028	0.036
b1	1.17	1.37	0.046	0.054
c	0.40	0.55	0.012	0.020
c1	1.17	1.37	0.046	0.054
D	9.90	10.20	0.390	0.402
E	8.90	9.10	0.335	0.350
E1	12.50	13.00	0.472	0.492
e	2.44	2.64	0.096	0.104
e1	4.88	5.28	0.192	0.208
F	2.60	2.80	0.102	0.110
L	12.70	13.70	0.520	0.543
L1	2.90	3.30	0.150	0.165
Φ	3.75	3.95	0.142	0.156