

High Frequency Ceramic Solutions

2.45 GHz EIA 0805 Balun / Filter Combination


P/N 2450FB15A050

Detail Specification: 1/15/2020

Page 1 of 4

General Specifications

Part Number	2450FB15A050
Frequency	2400 - 2500 MHz
Unbalanced Impedance	50 Ω
Balanced Impedance	50 Ω
Insertion Loss	1.5 dB max.
Return Loss	9.5 dB min.
Phase Difference	180 $\pm$ 10 deg.
Amplitude Difference	2.0 dB max.
Power Capacity	1W max. (CW)
Reel Quantity	4,000 pcs
Operating Temperature	-40 to +85°C
Attenuation	28 dB min. @2xF0 20 dB min. @3xF0



Recommended Storage Conditions of unused product on T&R


+5 to +35°C, 18 mos. max.
Humidity 45~75% RH

Part Number Explanation

P/N Suffix	Packing Style	Bulk	Suffix = S	Eg. 2450FB15A050S
		T & R	Suffix = E	Eg. 2450FB15A050E
	Termination style	100% Tin	Suffix = None	Eg. 2450FB15A050 (E or S)
	Evaluation Board	2450FB15A050-EB1SMA (3 female SMA connectors)		


Mechanical Dimensions

	In	mm
L	0.079 $\pm$ 0.004	2.00 $\pm$ 0.10
W	0.049 $\pm$ 0.004	1.25 $\pm$ 0.10
T	0.037 $\pm$ 0.004	0.95 $\pm$ 0.10
a	0.012 $\pm$ 0.004	0.30 $\pm$ 0.10
b	0.008 $\pm$ 0.004	0.20 $\pm$ 0.10
c	0.012 $\pm$ 0.004/0.008	0.30 $\pm$ 0.1/-0.2
g	0.014 $\pm$ 0.004	0.35 $\pm$ 0.10
p	0.026 $\pm$ 0.002	0.65 $\pm$ 0.05

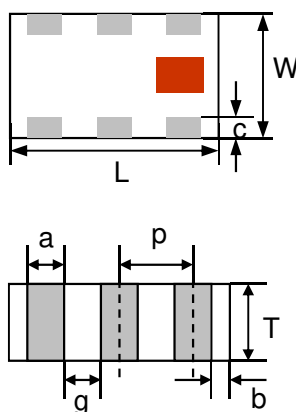

Terminal Configuration

1	Unbalanced Port (IN)
2	GND or DC feed + RF GND
3	Balanced Port (OUT1)
4	Balanced Port (OUT2)
5	GND
6	NC



Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 2.0

2020 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.45 GHz EIA 0805 Balun / Filter Combination

P/N 2450FB15A050


Detail Specification: 1/15/2020

Page 2 of 4

Mounting Considerations


Mount these devices with colored mark facing up.

* Line width should be designed to provide 50ohm impedance matching characteristics.

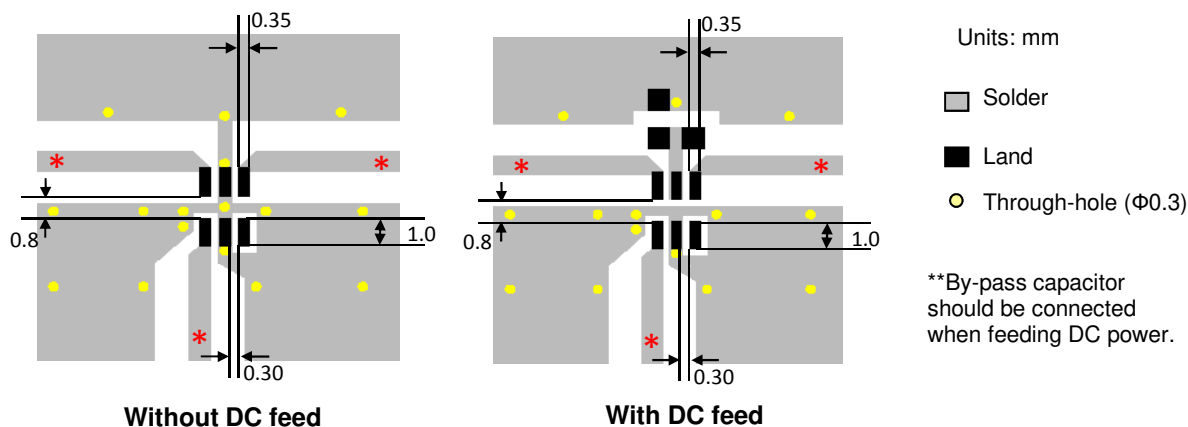

Need our help laying this out for you? Need the layout file? Send us a message at:
<https://www.johansontechnology.com/component/techquestion>

Measuring Diagram

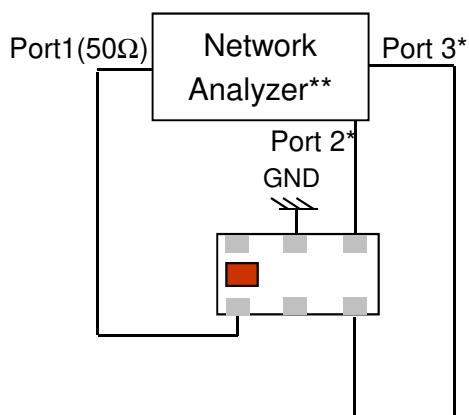

Port 1: Unbalanced Port
 Ports 2 and 3: Balanced Port
 $IL = S_{ds21}$
 $RL = S_{ss11}$
 $Amp_balance = dB(S(2,1)/S(3,1))$
 $Phase_balance = Phase(S(2,1)/S(3,1))$

* Impedance for ports 2 and 3 = Balanced Impedance/2

** E5071B from Agilent

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 2.0

2020 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.45 GHz EIA 0805 Balun / Filter Combination


P/N 2450FB15A050

Detail Specification: 1/15/2020


Page 3 of 4

Typical Electrical Characteristics (T=25°C)

Insertion and Return Loss

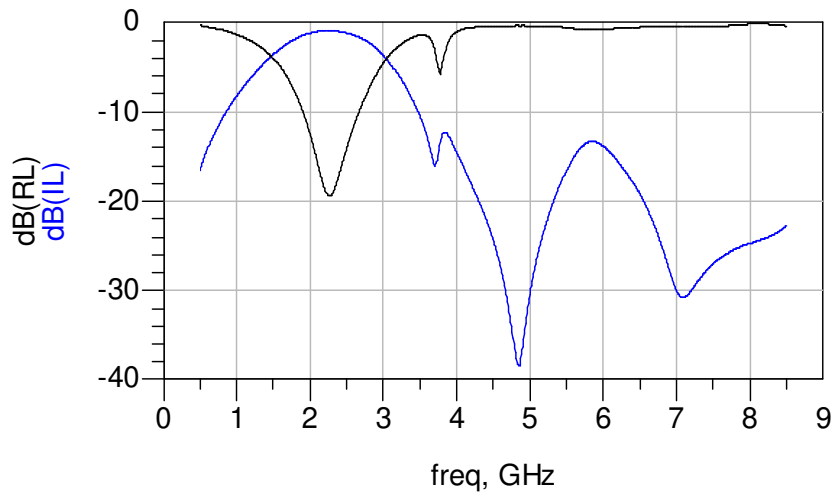

Amplitude and Phase Balance

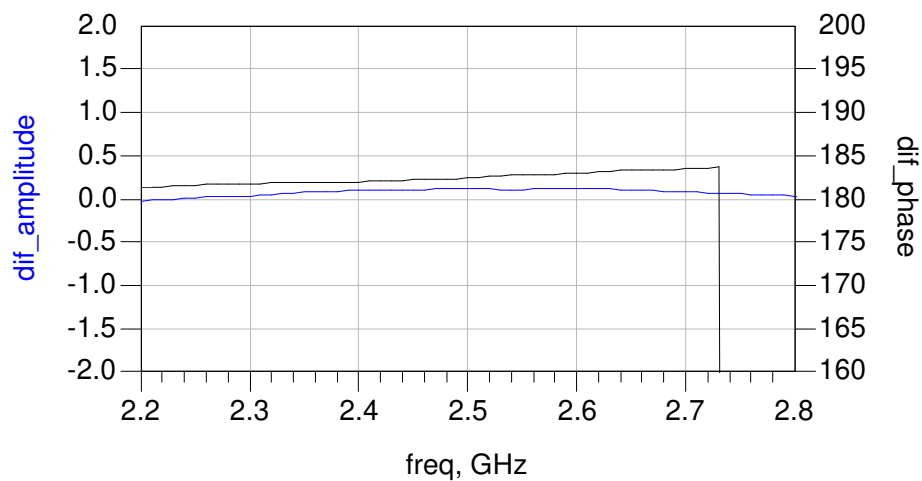

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 2.0

2020 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

2.45 GHz EIA 0805 Balun / Filter Combination

P/N 2450FB15A050

Detail Specification: 1/15/2020

Page 4 of 4

Application Notes, Layout Files, and more

<https://www.johansontechnology.com/balun-filter-combos>

Packaging information

<https://www.johansontechnology.com/tape-reel-packaging>

Soldering Information

<https://www.johansontechnology.com/ipcsoldering-profile>

MSL Info

<https://www.johansontechnology.com/msl-rating>

Recommended Storage Condition and Max Shelf Life

<https://www.johansontechnology.com/recommended-storage-conditions>

RoHS Compliance

<https://www.johansontechnology.com/technical-notes/rohs-compliance>

Antenna layout and tuning techniques

<https://www.johansontechnology.com/tuning.html>

Antenna layout review, tuning, and characterization services

<https://www.johansontechnology.com/ipc-antenna-services>

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 2.0

2020 Johanson Technology, Inc. All Rights Reserved