

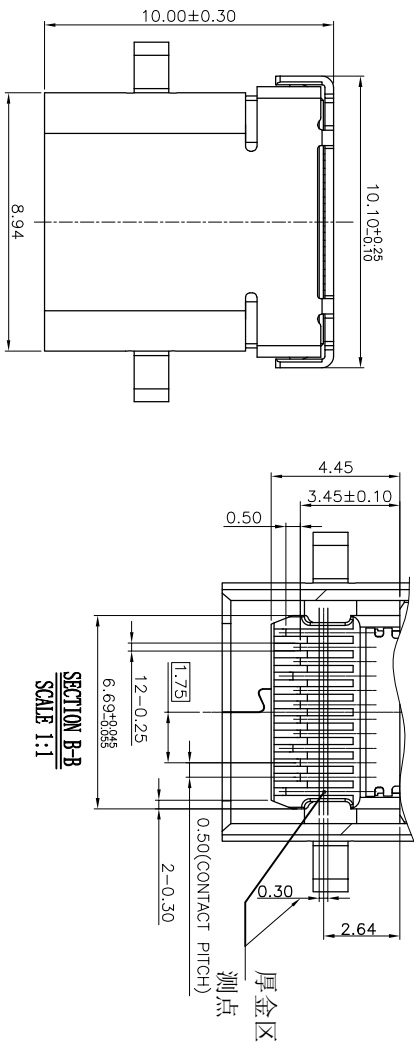
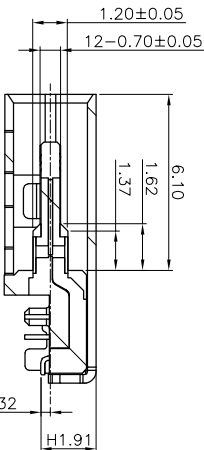




REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

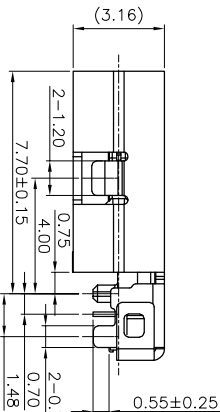

SECTION B-B
SCALE 1:1

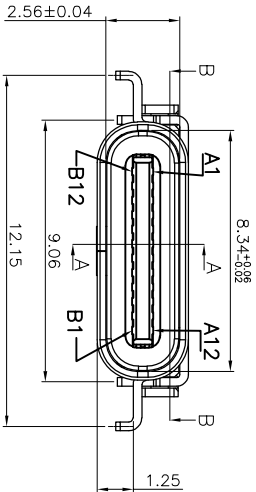

SECTION A-A
SCALE 1:1

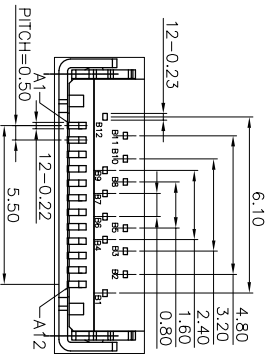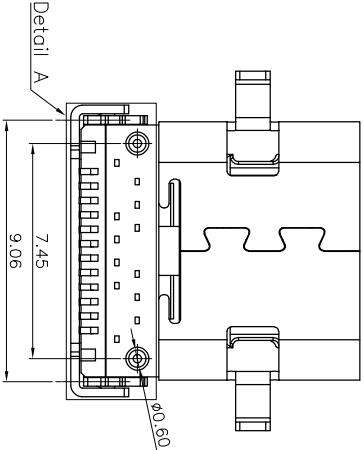

TOLERANCE		NAME(INTENDED USE)		DRAWG NO.	
X.X ±0.30 X: ±10°		CUSTOMER DRAWING		FY23-74TC242F210-01	
.XX ±0.20 .X: ±8°		PART NO.		CF 24P母座沉板10.0单壳	
.XXX ±0.10 .XX: ±5°		DESIGN: ZXM		FY23-74TC242F210-01	
UNITS mm		MATERIAL		SCALE 1:1	
FINISH		APPD:		SHEET 1/2	

富源 广东富源实业精密科技有限公司
Guangdong FUYUAN Precision Electronic Technology Co.,LTD.

CF 24P母座沉板10.0单壳

FY23-74TC242F210-01

SCALE 1:1



SHEET 1/2

REV. A

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS

PIN	Signal Name	Description	PIN	Signal Name	Description
A1	GND	Ground return	B12	GND	Ground return
A2	SSTXp1	Positive half of first SuperSpeed TX differential pair	B11	SSRXp1	Positive half of first SuperSpeed RX differential pair
A3	SSTXn1	Negative half of first SuperSpeed TX differential pair	B10	SSRXn1	Negative half of first SuperSpeed RX differential pair
A4	Vbus	Bus Power	B9	Vbus	Bus Power
A5	CC1	Configuration Channel	B8	SB12	Sideband Use (SBU)
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	B7	Dn2	Negative half of the USB 2.0 differential pair-Position 2
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2
A8	SB11	Sideband Use (SBU)	B5	CC2	Configuration Channel
A9	Vbus	Bus Power	B4	Vbus	Bus Power
A10	SSRXn2	Negative half of second SuperSpeed RX differential pair	B3	SSTXn2	Negative half of second SuperSpeed TX differential pair
A11	SSRXp2	Positive half of second SuperSpeed RX differential pair	B2	SSTXp2	Positive half of second SuperSpeed TX differential pair
A12	GND	Ground return	B1	GND	Ground return

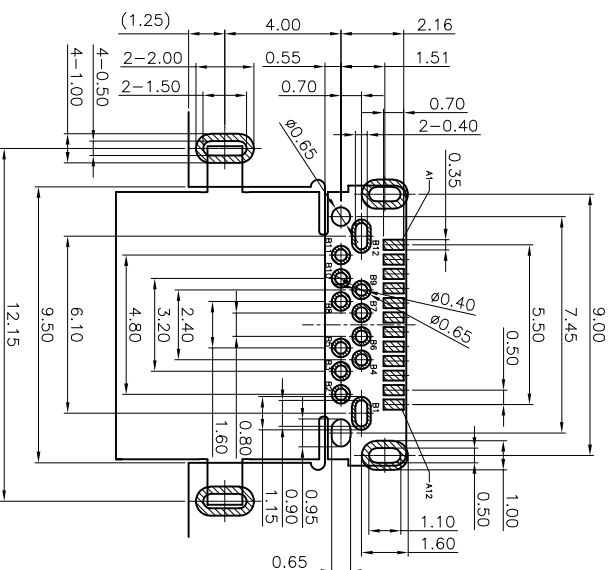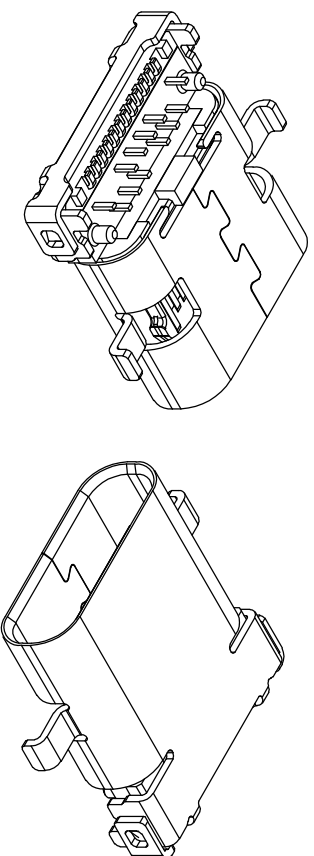

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)


TOLERANCE FOR PCB LAYOUT IS ± 0.05

KEEP OUT AREA

TOLERANCE		NAME(INTENDED USE) CUSTOMER DRAWING		 广东富盈兴业精密科技实业有限公司 Guangdong Furukawa Precision Electronic Technology Co.,LTD.	
X.X ±0.30	X.* ±10*	PART NO.	TITLE:		
.XX ±0.20	.X* ±8*	FY23-74TC242F210-01		CF 24P母座沉板10.0单壳	
.XXX ±0.10	.XX* ±5*	DESIGN:	ZXM	DRAWG NO.	
UNITS	mm	FY23-74TC242F210-0			
MATERILA	----	CHED:	SCALE		
FINISH	-----	APPD:	1:1 1/2 A SHEET REV.		


CUSTOMER

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

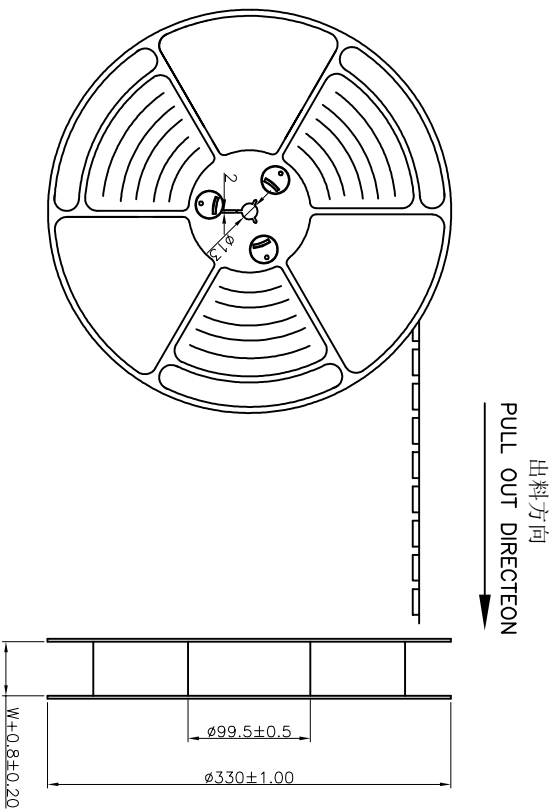



NOTES

1. 帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTION

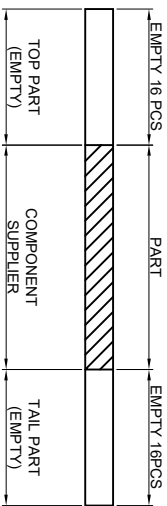

2. 上帶 剝力為: $0.1 \sim 1.3N(10.2gf \sim 130gf)$
PEELING OFF FORCE OF TOP TAPE: $0.1 \sim 1.3N(10.2gf \sim 130gf)$

出貨運輸過程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT;
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

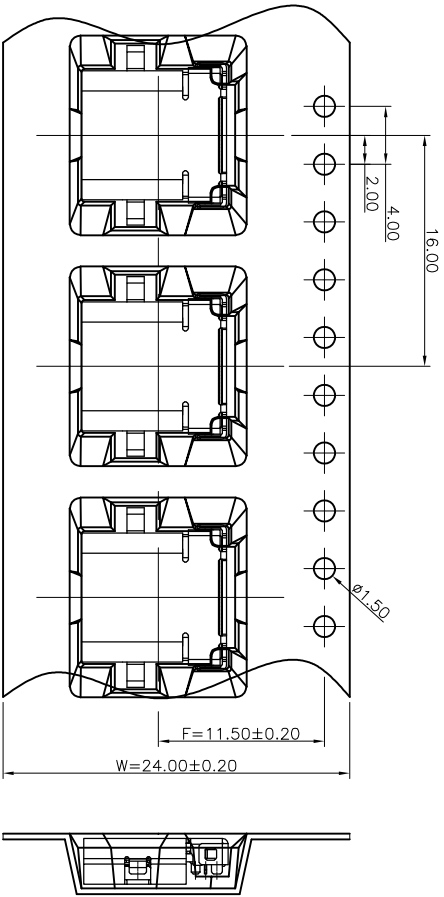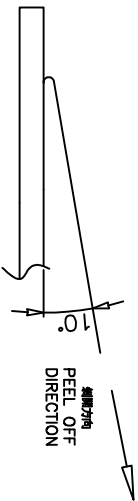

TOLERANCE		NAME(INTENDED USE) CUSTOMER DRAWING		DRAWG NO. FY23-74TC242F2X-01	
X.X	± 0.30	X.X	$\pm 10^\circ$	PART NO. FY23-74TC242F2X-01	TITLE: CF 24P母座沉板
.XX	± 0.20	.X	$\pm 8^\circ$	DESIGN: ZXM	
.XXX	± 0.10	.XX	$\pm 5^\circ$		
UNITS	mm				
MATERILA	----				
FINISH	-----				

Guoguang FUYOU 广东富源实业精密科技有限公司
Guoguang FUYOU Precision Electronic Technology Co.,LTD.

SCALE
1:1



SHEET
1/2

REV.
A

CUSTOMER


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

Label pasting location (facing the back of the circular hole on the roll)
标签粘贴处 (朝卷带圆孔反面)
Location of label sticking (label)

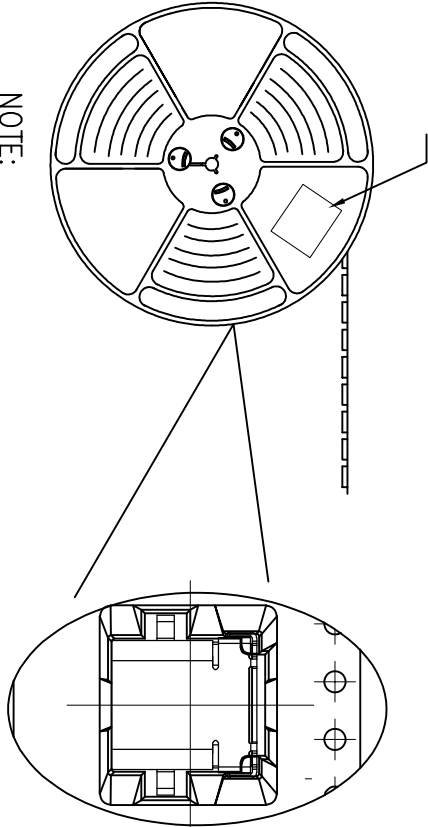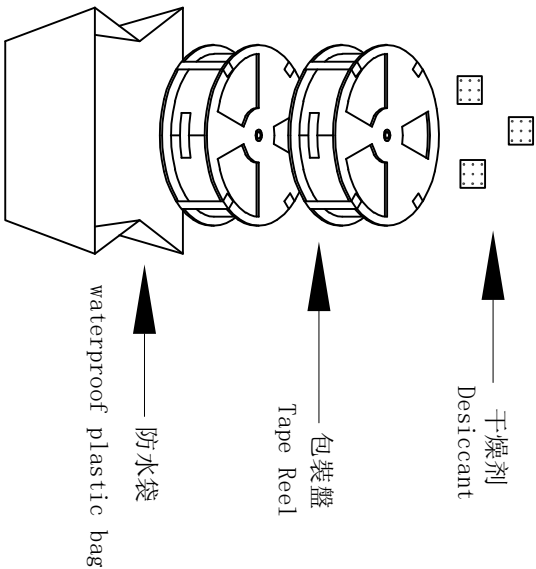

NOTE:

1. 每捲包裝數量及每箱裝箱數量如左下表格。
Packing q'ty of each reel & carton as below table shown.
2. 以上膠帶覆蓋下包裝帶經包裝機冷封包裝
Use cover tape to cover and hot melt machine to seal up.
3. 將裝滿產品的卷盤放入紙箱並以膠帶封口
Put reels in the carton and use adhesive tape to seal up.

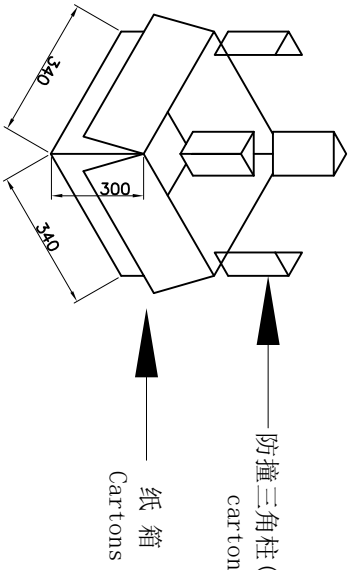

产品序号 (PRODUCT No.)	包装数量 (PACKING CAPACITY)	重量 WEIGHT (kg)
	PCS/REEL REELS/CARTON PCS/CARTON	N.W./PCS N.W./BOX G.W./BOX
	1000 10 10000	0.76g 7.6Kg

TOLERANCE	NAME(INTENDED USE) CUSTOMER DRAWING	FIGUO 广东富盈兴业精密科技实业有限公司 Guangdong FUYOU Precision Electronic Technology Co.,LTD.
X.X ±0.30 .XX ±0.20 .XXX ±0.10	X.X' ±10' .X' ± 8' .XX' ± 5'	PART NO. FY23-74TC242F2X-01
UNITS	mm	DESIGN: ZXM
MATERILA	----	CHED:
FINISH	-----	APPD:
		DRAWG NO. FY23-74TC242F2X-01
		SCALE 1:1
		SHEET 1/2
		REV. A