


APPEARANCE



DFN1006-2L (Bottom View)

PIN CONFIGURATION



Pin configuration (Top view)

Descriptions

The APED3.3L4.0-10 is a Bi-directional transient voltage suppressor (TVS) to protect sensitive electronic components from electrostatic discharge (ESD). It is particularly well-suited for cellular phones, PMP , MID, PDA, digital cameras and other electronic quipment. The APED3.3L4.0-10 is safely dissipating ESD strikes to meet the ESD immunity testing of IEC61000-4-2 ($\pm 15KV$).


The APED3.3L4.0-10 is available in DFN1006-2L package. Standard products are Pb-free and Halogen-free.

Order information

Device	Package	Shipping
APED3.3L4.0-10	DFN1006-2L	10000/Tape&Reel

Electrical Parameters (T=25°C)

Symbol	Parameter
VRWM	Reverse Stand-off Voltage
IR	Reverse Leakage Current @ VRWM
VBR	Reverse Breakdown Voltage @ IT
IT	Test Current
IPP	Reverse Peak Pulse Current
VC	Clamping Voltage @ IPP

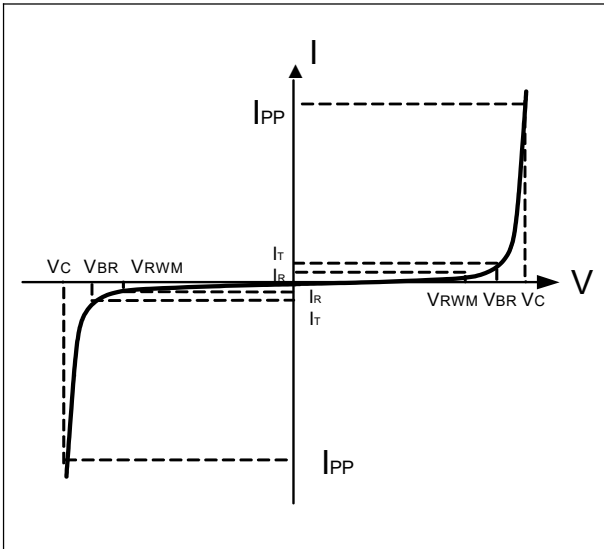


Absolute maximum ratings

Parameter	Symbol	Rating	Unit
Peak pulse power ($t_p = 8/20\mu s$)	Ppk	88	W
Peak pulse current ($t_p = 8/20\mu s$)	I _{PP}	4.0	A
ESD according to IEC61000-4-2 air discharge	V _{ESD}	±15	kV
ESD according to IEC61000-4-2 contact discharge		±15	kV
Junction temperature	T _J	150	°C
Operating temperature	T _{OP}	-55~125	°C
Storage temperature	T _{STG}	-55~150	°C


Electronics characteristics (Ta=25°C)

Parameter	Symbol	Condition	Min	Typ	Max	Units
Reverse Stand-off Voltage	VRWM				3.3	V
Reverse Breakdown Voltage	VBR	I _t =1mA	5.8	7.7	9.0	V
Reverse Leakage Current	I _R	VRWM=±3.3V			0.1	uA
Clamping Voltage	V _C	I _{pp} =4.0A, t _p =8/20us			24	V
Junction Capacitance	C _j	V _R =0V, f=1MHz		0.25		pF


Typical characteristics (Ta=25°C)

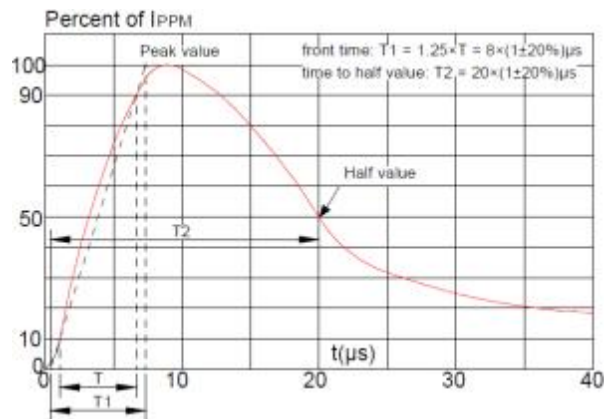

Pulse Waveform (8/20us)

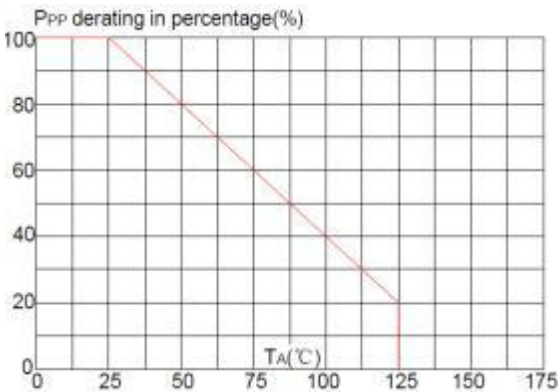


Pulse Derating Curve

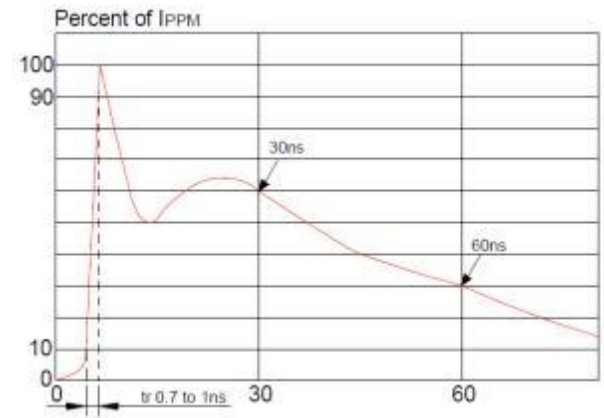


ESD Clamping(8kV Contact Discharge)

PACKAGE OUTLINE DIMENSIONS(DFN1006-2L)

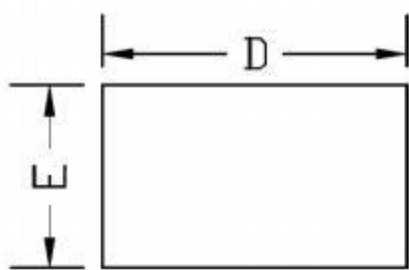

TOP VIEW

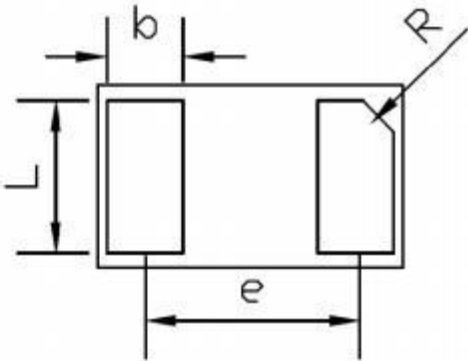

BOTTOM VIEW



SIDE VIEW

COMMON DIMENSION (MM)			
PKG	DFN1006		
REF.	MIN.	NOM.	MAX
A	0.45	0.50	0.55
D	0.95	1.00	1.05
E	0.55	0.60	0.65
b	0.20	0.25	0.30
L	0.45	0.50	0.55
e	0.675		
R	0.07	0.10	0.13

Note:
This recommended land pattern is for reference purpose only.