

J10-15AW SERVES

- 封装尺寸Size dimensional: 62.0x45.0x22.5mm
- 宽范围输入Wide input voltage range
- 转换效率典型Typical efficiency : 80%
- 开关频率Switching frequency: 60KHz±10KHz
- 过流、短路保护,自恢复Over current、short circuit protection
- 输入与输出高隔离Input-output isolate
- PCB板上直插式安装Board in-line type installs
- 温度适应范围宽Wide temperature range

外形图Outside drawing



CE RoHS

输入特性Input

输入电压范围 Input voltage range	标称Nom(V)	最小Min(V)	最大Max(V)	输入比Input
	220AC(310Vdc)	85AC(120Vdc)	265AC(380Vdc)	3:1
	220AC(310Vdc)	165AC(200Vdc)	265AC(380Vdc)	1.65:1
输入频率范围	50Hz	47Hz	440Hz	47-440Hz
遥控端 ON/OFF	无遥控端No remote			

输出特性Output

输出电压精度Output voltage accuracy	标称电压Nominal output voltage	Vo1:±1.0%;Vo2,V03:±2.0%
源效应Line regulation	标称负载, 全范围Nominal load, gamut	Vo1:±0.2%;Vo2,V03:±0.5%
负载效应Load regulation	20%~100%额定负载Rated load	Vo1:±0.5%;Vo2,V03:±3.0%
输出纹波及噪声 Output Ripple and noise	20MHz Bm满载Full load	Vo≤5V:≤80mVp-p
		Vo≥48V:≤180mVp-p;
		其它电压≤120mVp-p
动态响应Dynamic response	25%的标称负载阶跃Nom load stepped	ΔVo1/Δt:±4.0/500us%
输出电压调节Output voltage adjust		无调节端
启动延迟时间Start delay time	典型值Typical	≤500ms
输出短路保护Short circuit protection	长期短路Continued shortcircuit protection	自恢复

一般特性General

转换效率Efficiency	Vo≤5.0V:80%典型Typical	Vo>5.0V:82%典型
开关频率Switching frequency	60KHz典型Typical	70KHz最大Max
工作温度Operating temperature	自由空气对流Free air convection	-25℃~+75℃工业级
		-40℃~+85℃军级
焊接温度Welding temperature	手工焊接Hand welding	360±10℃;时间:5~10S
	波峰焊接Wave welding	260±5℃;时间:3~5S
储存温度Storage temperature		-40℃~+105℃
相对湿度Relative humidity		10%~90%
外壳材料Case material	UL94V-0黑色塑壳Black plastic case:AP	黑色金属壳Black metal case:AC
隔离电压Isolation voltage	输入与输出Input and output	2.5KVac≤2mA/1分钟Minute
	输入与外壳Input and case	AP:5KVac;AC:1.5KVac≤1mA/1分钟
最小无故障间隔时间 (MTBF)		2X10 ⁵ Hrs

J10-15AW SERIES


典型应用Type

输入电压范围 Input voltage range	标称输出电压/输出电流Nom output voltage/current						
	单路Single		型号Type	双路Dual		型号Type	
	V	A		V	A		
165-265Vac 200-380Vdc 85-265Vac 120-380Vdc	3.3V	2.0A	J10AW220S3V3B7	±3.3V	±1.0A	J10AW220D3V3B7	
	5V	2.0A	J10AW220S05B7	±5V	±1.0A	J10AW220D05B7	
	9V	1.11A	J10AW220S09B7	±9V	±555mA	J10AW220D09B7	
	12V	833mA	J10AW220S12B7	±12V	±416mA	J10AW220D12B7	
	15V	666mA	J10AW220S15B7	±15V	±333mA	J10AW220D15B7	
	18V	555mA	J10AW220S18B7	±18V	±277mA	J10AW220D18B7	
	24V	416mA	J10AW220S24B7	±24V	±208mA	J10AW220D24B7	
	48V	208mA	J10AW220S48B7	+5V/+12V	1.5A/0.1A	J10AW220D05-12B7	
	3.3V	3.0A	J15AW220S3V3B7	±3.3V	±1.5A	J15AW220D3V3B7	
	5V	3.0A	J15AW220S05B7	±5V	±1.5A	J15AW220D05B7	
	9V	1.66A	J15AW220S09B7	±9V	±833mA	J15AW220D09B7	
	12V	1.25A	J15AW220S12B7	±12V	±625mA	J15AW220D12B7	
	15V	1.0A	J15AW220S15B7	±15V	±500mA	J15AW220D15B7	
	18V	833mA	J15AW220S18B7	±18V	±416mA	J15AW220D18B7	
	24V	625mA	J15AW220S24B7	±24V	±312mA	J15AW220D24B7	
	48V	312mA	J15AW220S48B7	+5V/+12V	2.5A/0.1A	J15AW220D05-12B7	
	三路Three						型号Type
	Vout1		Vout2		Vout3		
V	A	V	A	V	A		
+5V	1.5A	+12V	0.1A	-12V	0.1A	J10AW220T05-12B7	
						J15AW220T05-12B7	

注1: 因篇幅有限, 以上只是部分产品列表, 若需列表以外产品, 请与本公司销售部或办事处联系。

2: 当工作温度为+70℃时, 应按温度降额曲线图使用。

3: 测试条件: 所有参数测试均在标称输入电压、纯阻性额定负载及25℃室温环境下测得。

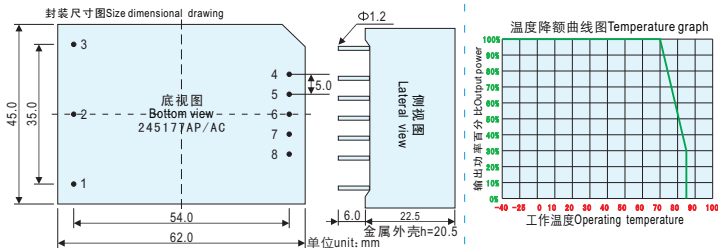

管脚说明Pin	1	2	3	4	5	6	7	8
单路Single	FG	AC(N)	AC(L)	+Vout	NP	NP	NP	GND
双路Dual	FG	AC(N)	AC(L)	+Vout1	NP	COM	NP	-Vout2
双路隔离DI	FG	AC(N)	AC(L)	+Vout2	GND2	NP	+Vout1	GND1
三路隔离TI	FG	AC(N)	AC(L)	+Vout2	COM	-Vout3	+Vout1	GND1