

SuperMOS – PDFN5*6-8L 100V BV_{DSS}, 91mΩ R_{DS(ON)}, N-channel MOSFET

1. Description

The ESN6484 is N-Channel enhancement MOS Field Effect Transistor. Uses advanced trench technology and design to provide excellent R_{DS(ON)} with low gate charge. Device is suitable for use in DC-DC conversion, power switch and charging circuit. Standard Product ESN6484 is Pb-free.

2. Features

- 100V, R_{DS(ON)}=91mΩ(Tpy), V_{GS}=10V
R_{DS(ON)}=97mΩ(Tpy), V_{GS}=4.5V
 - Use trench MOSFET technology
 - High density cell design for low R_{DS(on)}
- Material: Halogen free
 - Reliable and rugged
 - Avalanche Rated
 - Low leakage current


3. Applications

- PWM applications
 - Load switch
 - Power management in portable/desktop PCs
 - DC/DC conversion
- 100% UIS TESTED!

4. Ordering Information

Part Number	Package	Marking	Material	Packing	Quantity per reel	Flammability Rating	Reel Size
ESN6484	PDFN5*6-8L	ESN6484/lot	Halogen free	Tape & Reel	5,000 PCS	UL 94V-0	13 inches

5. Pin Configuration and Functions

Pin	Function	Outline	Circuit Diagram
4	Gate	Note d 	
1/2/3	Source		
5/6/7/8	Drain		

6. Specification

Absolute Maximum Rating & Thermal Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter		Symbol	Limit	Unit
Drain-Source Voltage		BV_{DSS}	100	V
Gate-Source Voltage		V_{GS}	± 20	V
Continuous Drain Current	$T_C=25^{\circ}\text{C}$	I_D	11	A
	$T_C=75^{\circ}\text{C}$		9	
Maximum Power Dissipation	$T_C=25^{\circ}\text{C}$	P_D	25	W
	$T_C=75^{\circ}\text{C}$		15	
Pulsed Drain Current ^a		I_{DM}	44	A
Avalanche Current, Single Pulsed ^b		I_{AS}	12.5	A
Avalanche Energy, Single Pulsed ^b		E_{AS}	23.4	mJ
Operating Junction Temperature		T_J	150	$^{\circ}\text{C}$
Lead Temperature		T_L	260	$^{\circ}\text{C}$
Storage Temperature Range		T_{stg}	-55 to 150	$^{\circ}\text{C}$

Thermal resistance ratings

Single Operation					
Parameter		Symbol	Typical	Maximum	Unit
Junction-to-Ambient Thermal Resistance	$t \leq 10 \text{ s}$	$R_{\theta JA}$	21	25	$^{\circ}\text{C/W}$
Junction-to-Case Thermal Resistance ^c	Steady State	$R_{\theta JC}$	3.5	5	

Note:

a: Repetitive rating, pulse width limited by junction temperature, $t_p=10\mu\text{s}$, Duty Cycle=1%

b: EAS condition: $T_J=25^{\circ}\text{C}$, $V_{DD}=50\text{V}$, $V_G=10\text{V}$, $L=0.3\text{mH}$, $R_g=25\Omega$

c: Device mounted on FR-4 substrate PC board, 2oz copper, with 1inch square copper plate.

d: This diagram is only an electrical schematic, and the actual pin size is based on POD.

Electrical Characteristics

At TA = 25°C unless otherwise specified

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
OFF CHARACTERISTICS						
Drain-to-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =250uA	100			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =100V, V _{GS} =0V			1	uA
Gate-to-source Leakage Current	I _{GSS}	V _{DS} =0V, V _{GS} =±20V			±100	nA
ON CHARACTERISTICS						
Gate Threshold Voltage	V _{GS(TH)}	V _{GS} =V _{DS} , I _D =250uA	1.0	1.8	3.0	V
Drain-to-source On-resistance	R _{DS(on)}	V _{GS} =10V, I _D =7.5A		91	122	mΩ
		V _{GS} =4.5V, I _D =5A		97	142	
Forward Trans conductance	g _{FS}	V _{DS} =5.0V, I _D =7.5A			40	S
CHARGES, CAPACITANCES AND GATE RESISTANCE						
Input Capacitance	C _{ISS}	V _{GS} =0V, f=1MHz, V _{DS} =50V		780		pF
Output Capacitance	C _{OSS}			58		
Reverse Transfer Capacitance	C _{RSS}			26		
Total Gate Charge	Q _{G(TOT)}	V _{GS} =4.5V, V _{DS} =50V, I _D =7.5A		19.2		nC
Gate-to-Source Charge	Q _{GS}			3.5		
Gate-to-Drain Charge	Q _{GD}			5.3		
SWITCHING CHARACTERISTICS						
Turn-On Delay Time	t _{d(ON)}	V _{GS} =10V, V _{DS} =50V, R _L =6Ω, R _G =3Ω		6		ns
Rise Time	t _r			2.6		
Turn-Off Delay Time	t _{d(OFF)}			22		
Fall Time	t _f			2.5		
BODY DIODE CHARACTERISTICS						
Forward Voltage	V _{SD}	V _{GS} =0V, I _S =1A		0.7	1.2	V

7. Typical Characteristic

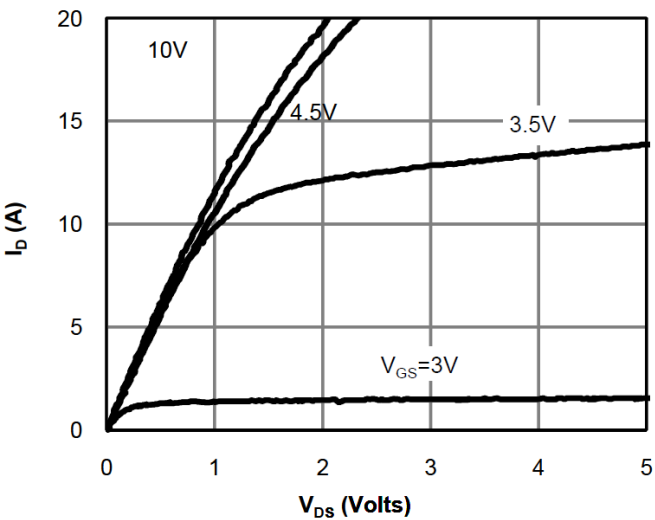


Fig 1: On-Region Characteristics

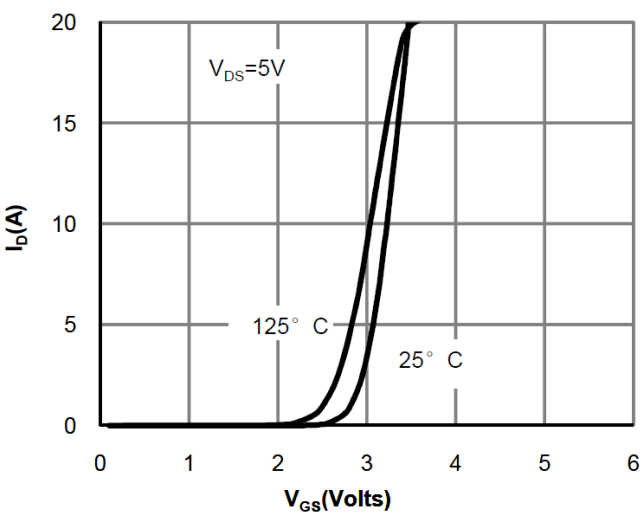


Figure 2: Transfer Characteristics

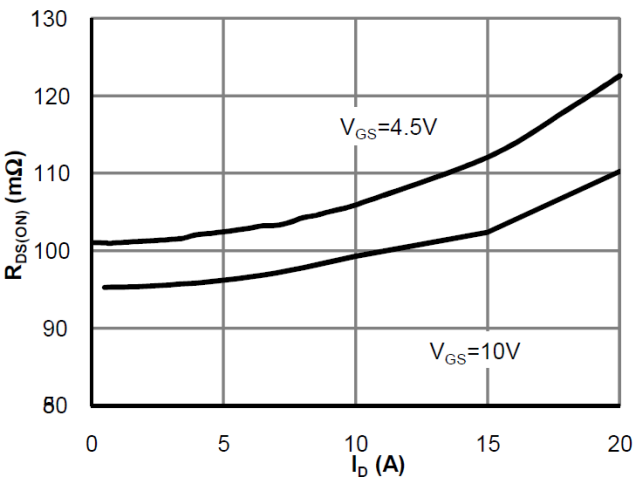


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

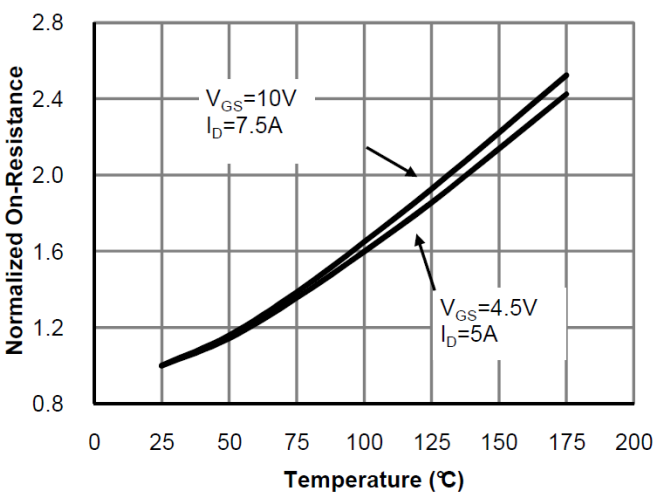


Figure 4: On-Resistance vs. Junction Temperature

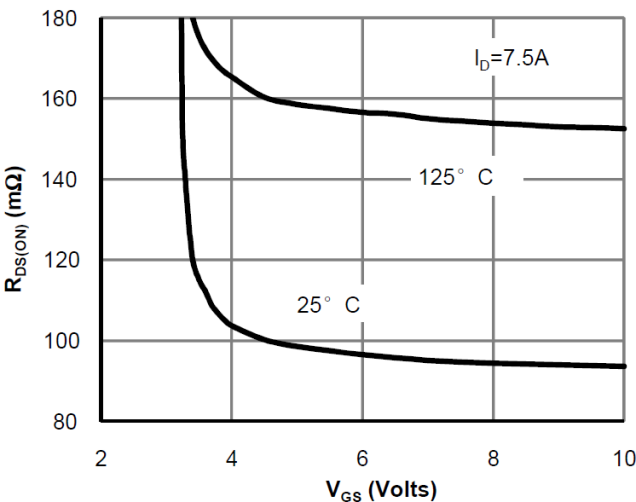


Figure 5: On-Resistance vs. Gate-Source Voltage

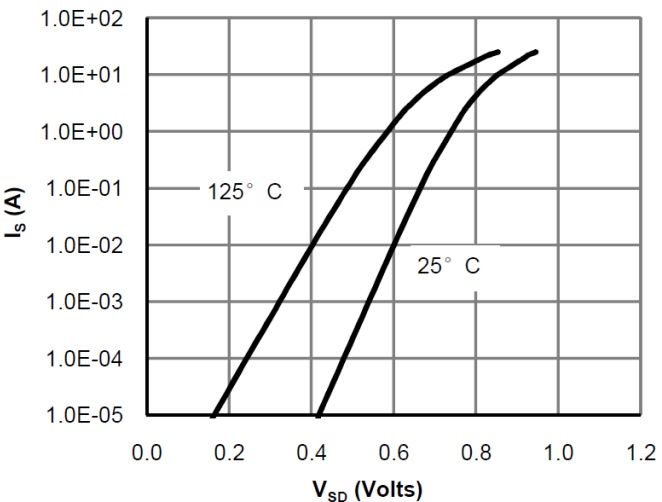


Figure 6: Body-Diode Characteristics


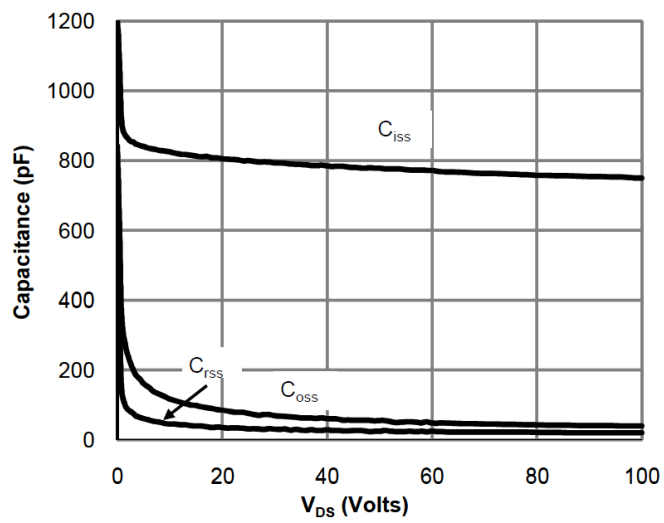


Figure 7: Capacitance Characteristics


8. Dimension (PDFN5*6-8L)

POD A(J)

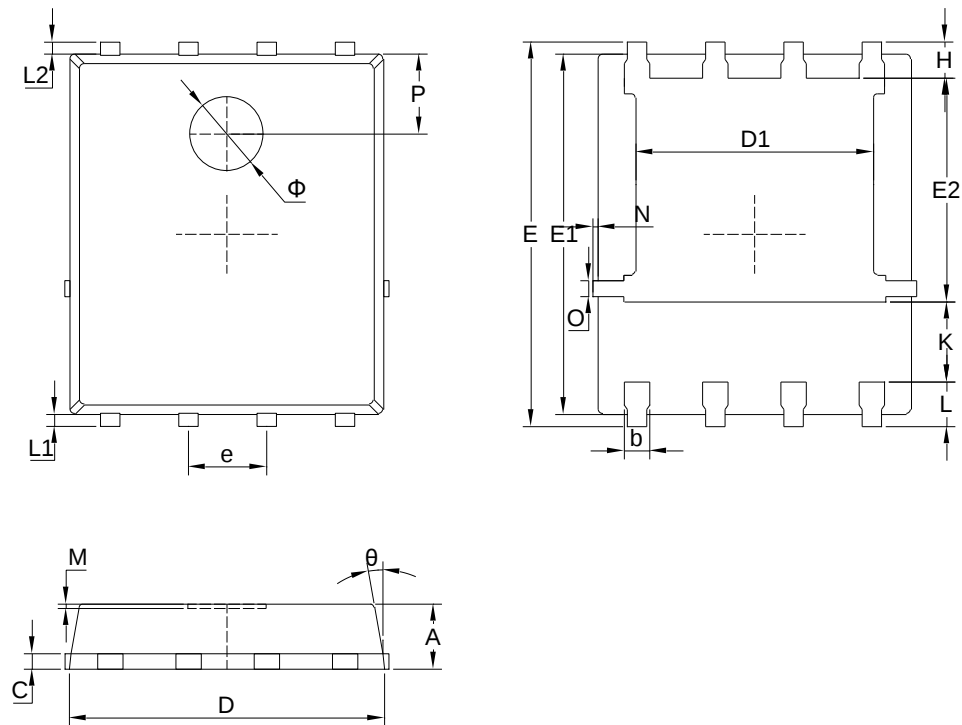


Symbol	Dimensions in Millimeters			Symbol	Dimensions in Millimeters		
	MIN	NOM	MAX		MIN	NOM	MAX
A	0.90	1.05	1.20	H	0.48	0.58	0.68
b	0.35	0.40	0.50	K	1.17	1.27	1.37
C	0.20	0.25	0.35	L	0.64	0.74	0.84
D	4.90	5.05	5.20	L1/L2	0.20 REF.		
D1	3.72	3.82	3.92	θ	8°	10°	12°
E	6.00	6.15	6.30	M	0.08 REF.		
E1	5.60	5.75	5.90	N	0	-	0.15
E2	3.47	3.57	3.67	O	0.25 REF.		
e	1.27 BSC.			P	1.28 REF.		
ϕ	1.20 REF						

POD B(Q)

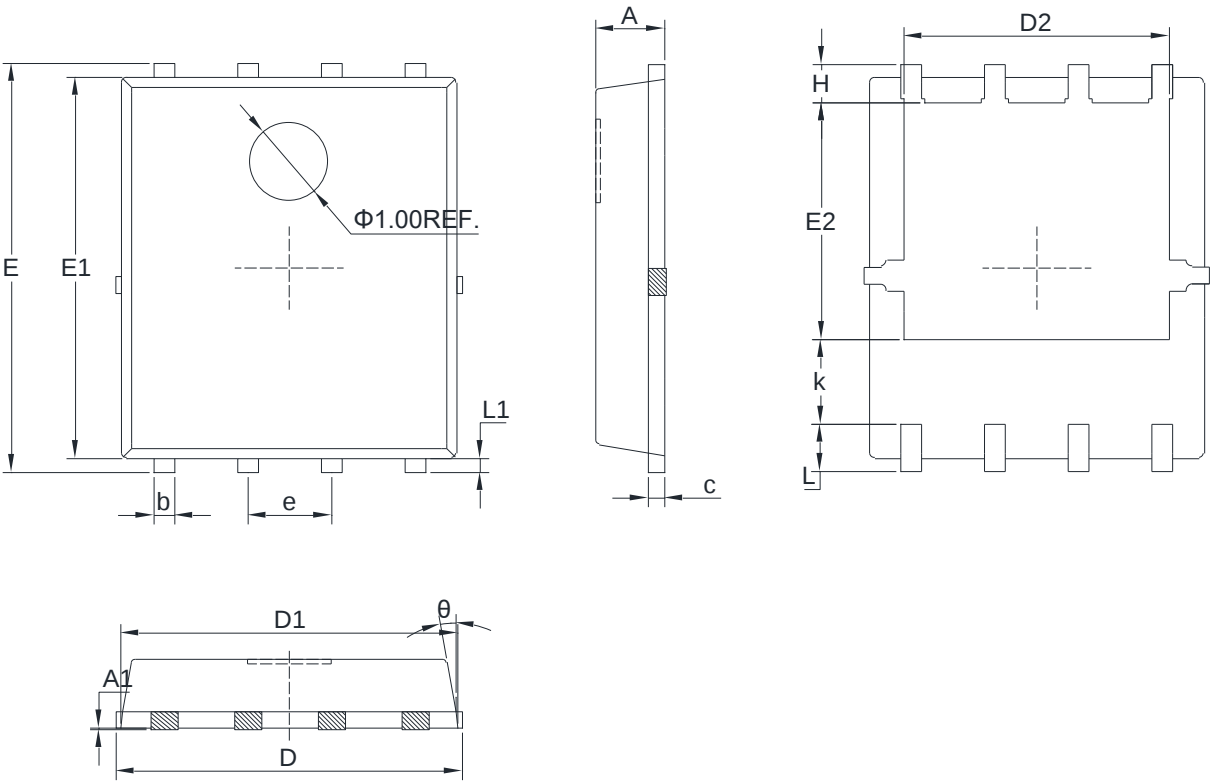

Symbol	Dimensions in Millimeters			Symbol	Dimensions in Millimeters		
	MIN	NOM	MAX		MIN	NOM	MAX
A	0.90	1.00	1.10	H	0.46	0.56	0.66
A1			0.05	k	1.10		
b	0.30	0.40	0.50	L	0.51	0.61	0.71
c	0.20	0.25	0.30	L1	0.05	0.15	0.25
D	4.80	5.10	5.40	θ	8°	10°	12°
D2	3.75	3.90	4.05	D1	4.80	4.90	5.00
E	5.95	6.05	6.15				
E1	5.65	5.75	5.85				
e	1.27BCS						
E2	3.34	3.49	3.64				

POD C(X)

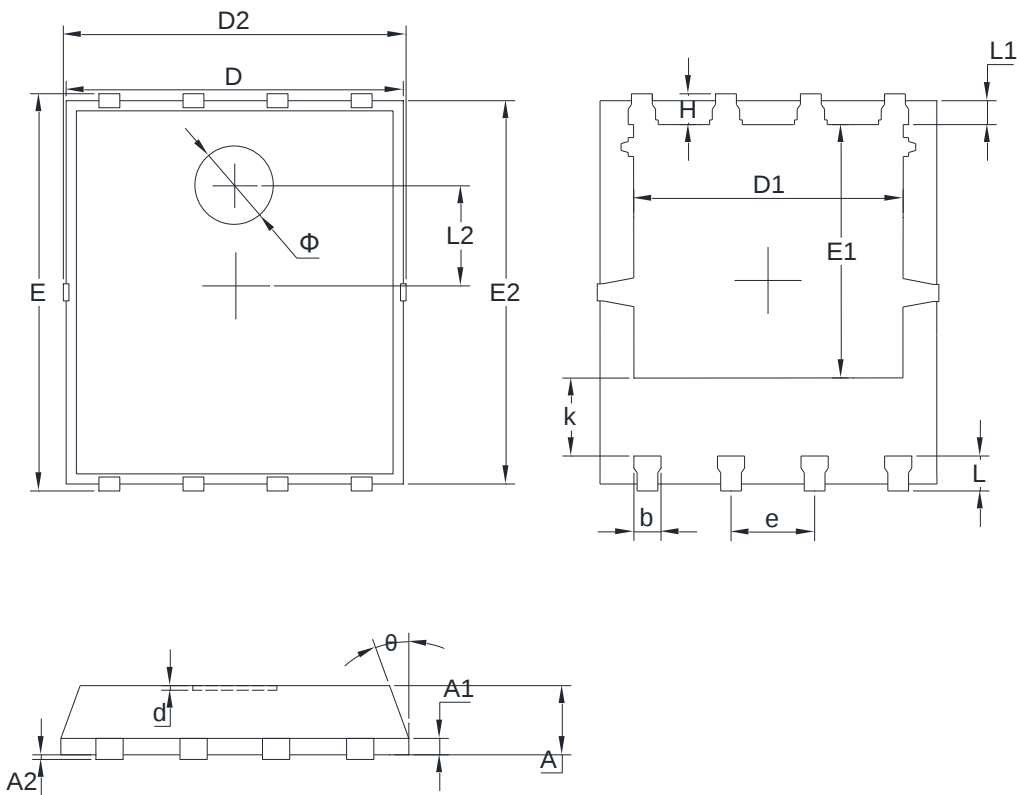

Symbol	Dimensions in Millimeters			Symbol	Dimensions in Millimeters		
	MIN	NOM	MAX		MIN	NOM	MAX
A	0.900	1.000	1.100	H	0.549	0.625	0.701
A1	0.254 REF			k	1.190	1.290	1.390
A2	0.000		0.050	L	0.534	0.610	0.686
D	4.824	4.900	4.976	L1	0.424	0.500	0.576
D1	3.910	4.010	4.110	θ	8°	10°	12°
D2	4.924	5.000	5.076	L2	1.800 REF		
E	5.924	6.000	6.076	ϕ	1.100	1.200	1.300
E1	3.375	3.475	3.575	d			0.100
e	1.270 TYP			b	0.350	0.400	0.450
E2	5.674	5.750	5.826				

DISCLAIMER

ELECSUPER PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with ElecSuper products. You are solely responsible for

- (1) selecting the appropriate ElecSuper products for your application;
- (2) designing, validating and testing your application;
- (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements.

These resources are subject to change without notice. ElecSuper grants you permission to use these resources only for development of an application that uses the ElecSuper products described in the resource. Other reproduction and display of these resources are prohibited. No license is granted to any other ElecSuper intellectual property right or to any third party intellectual property right. ElecSuper disclaims responsibility for, and you will fully indemnify ElecSuper and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources. ElecSuper's products are provided subject to ElecSuper's Terms of Sale or other applicable terms available either on www.elecsuper.com or provided in conjunction with such ElecSuper products. ElecSuper's provision of these resources does not expand or otherwise alter ElecSuper's applicable warranties or warranty disclaimers for ElecSuper products.