

SuperESD - TPD4E02B04DQAR-ES

1.Description

The TPD4E02B04DQAR-ES is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability. Low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium.

2.Features

- IEC 61000-4-2 Level 4 ESD Protection
 - $\pm 12\text{kV}$ Contact Discharge
 - $\pm 17\text{kV}$ Air Discharge
- IEC 61000-4-4 EFT Protection
 - 40A (5/50ns)
- IEC 61000-4-5 Surge
 - 8A (8/20us)
- RoHS compliance
- Protecting four I/O lines
- Ultra-low Capacitance:0.6pF (Typical)
- Low clamping voltage
- Low leakage current
- Solid-state silicon technology

3.Applications

- HDMI/USB2.0
- Monitors and flat panel displays
- 10/100/1000 ethernet
- Notebook computers
- SIM ports
- ATM interface

4.Ordering Information

Part Number	Package	Marking	Material	Packing	Quantity per reel	Flammability Rating	Reel Size
TPD4E02B04D	DFN2510-10L	.3324P	Halogen free	Tape & Reel	3000	UL 94V-0	7 inches
QAR-ES					PCS		

Table-1 Ordering information

5.Pin Configuration and Functions


Pin	Name	Description	Outline (PODA)	Circuit Diagram
1,2,4,5	IO	Connect to IO	Note 1 	
3,8	GND	Connect to GND		
Others	NC	No Connection		

Table-2 Pin configuration

Note1:

This diagram is only an electrical schematic, and the actual pin size is based on POD.

6.Specification

6.1. Absolute Maximum rating

Over operating free-air temperature range (unless otherwise noted)

Parameters	Symbol	Min.	Max.	Unit
Peak pulse power (tp=8/20us)@25°C	P_{pk}	-	120	W
Peak pulse current (tp=8/20us)@25°C	I_{PP}		8	A
ESD (IEC61000-4-2 air discharge) @25°C	V_{ESD}	-	±17	kV
ESD (IEC61000-4-2 contact discharge) @25°C	V_{ESD}	-	±12	kV
Junction temperature	T_J	-	150	°C
Operating temperature	T_{OP}	-40	125	°C
Storage temperature	T_{STG}	-55	150	°C
Lead temperature	T_L	-	260	°C

Table-3 Absolute Maximum rating


6.2. Eletrical Characteristics

At TA = 25°C unless otherwise noted


Parameters	Symbol	conditions	Min.	Typ.	Max.	Unit
Reverse stand-off voltage	V_{RWM}				3.3	V
Reverse Breakdown Voltage	V_{BR}	$I_T = 1\text{mA}$	4.0			V
Reverse Leakage Current	I_R	$V_{RWM} = 3.3\text{V}$			1	μA
Clamping Voltage	V_{CL}	$I_{PP} = 1\text{A}$; $TP = 8/20\mu\text{s}$		6.0	9.0	V
Clamping Voltage	V_{CL}	$I_{PP} = 8\text{A}$; $TP = 8/20\mu\text{s}$		12.0	15.0	V
Junction capacitance	C_J	I/O pins to ground; $V_R = 0\text{V}$; $f = 1\text{MHz}$		0.6	1.0	pF
		Between I/O pins; $V_R = 0\text{V}$; $f = 1\text{MHz}$		0.3	0.5	

Table-4 Electrical Characteristics


Symbol	Parameters
V_{RWM}	Peak Reverse Working Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
I_F	Forward Current
V_F	Forward Voltage @ I_F

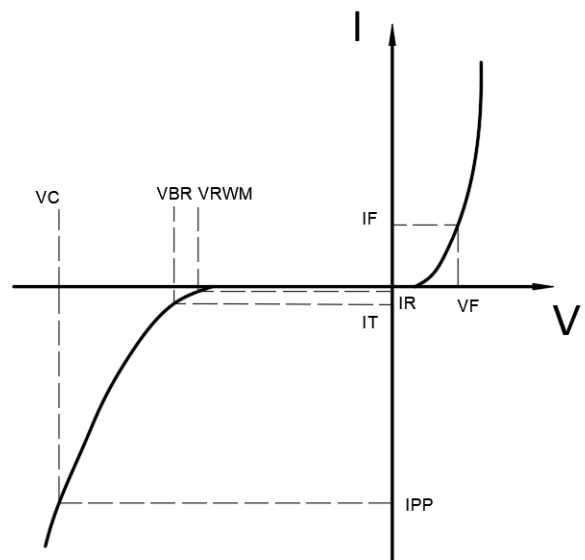

7. Typical Characteristic

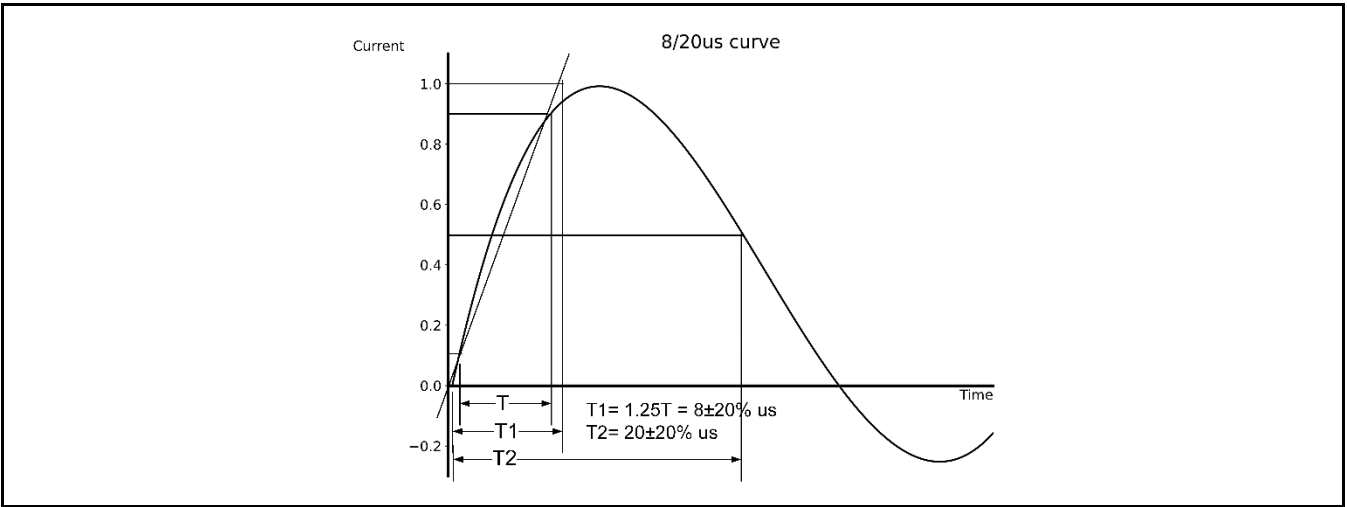


8. Typical Application

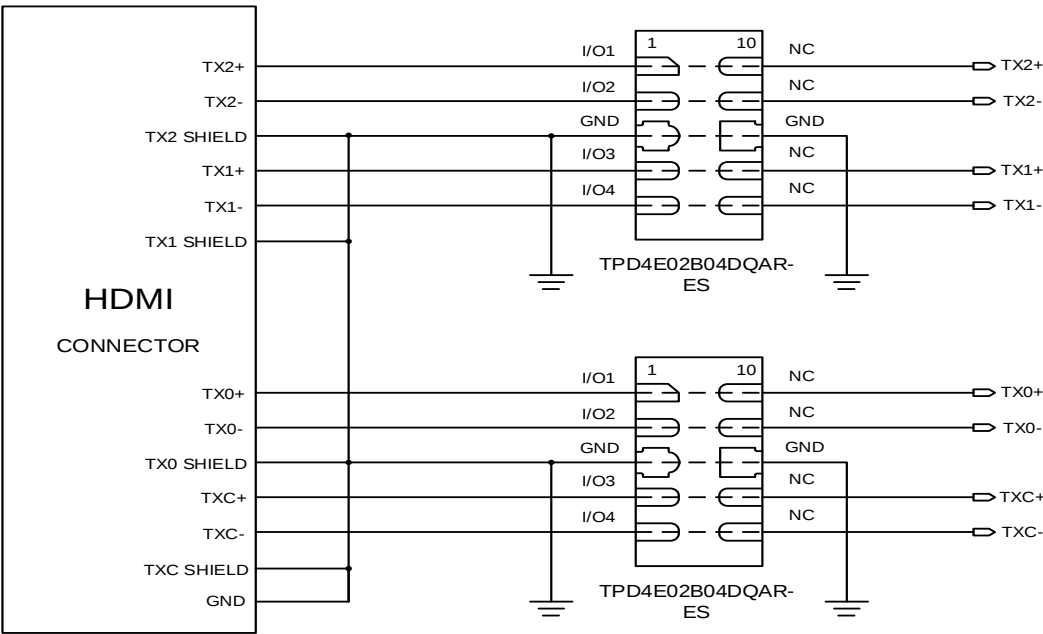

Typical HDMI Interface Application


9.Dimension (DFN2510-10L)

POD A(C)

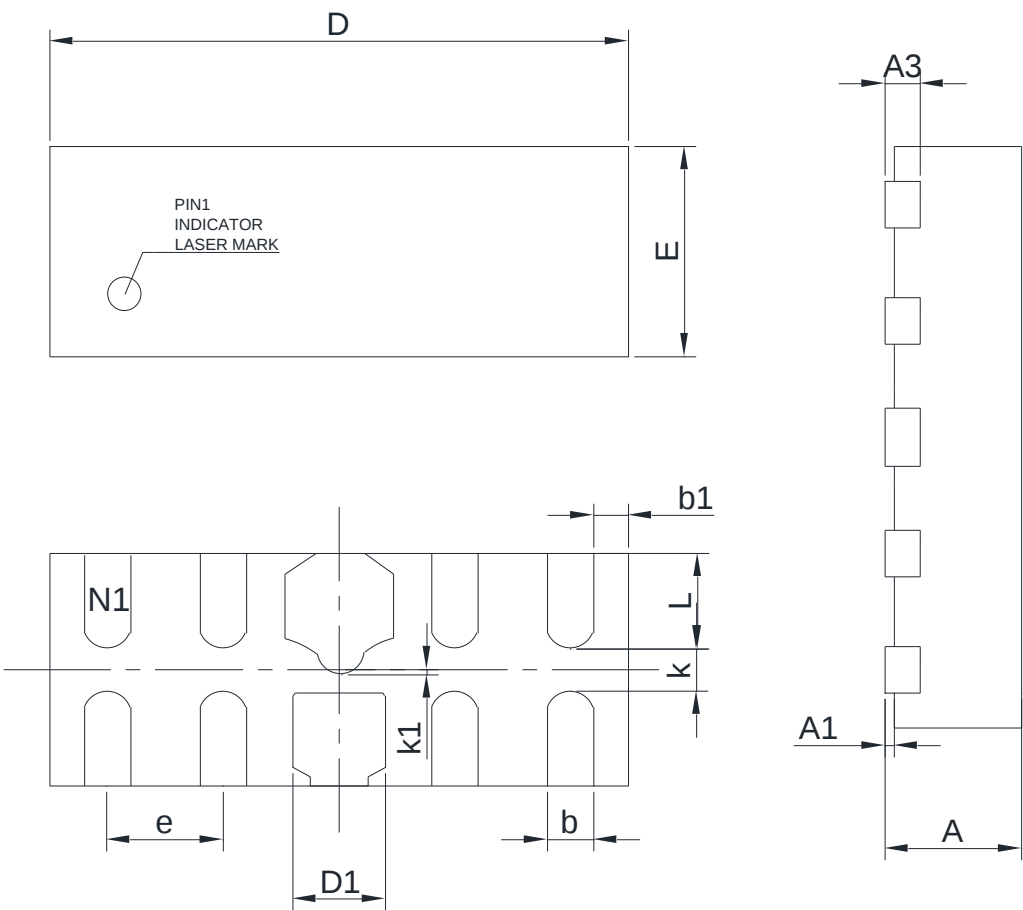


Dimensions in Millimeter							
Symbol	Min.	Nom.	Max.	Symbol	Min.	Nom.	Max.
A	0.450	0.500	0.550	D	2.450	2.500	2.550
A1	0.000	0.025	0.050	E	0.950	1.000	1.050
A3	0.110 REF			e	0.500 TYP		
b	0.180	0.220	0.260	k1	0.060	0.080	0.100
b1	0.100	0.150	0.200	L	0.350	0.400	0.450
D1	0.350	0.400	0.450	K	0.210	0.220	0.230

POD B(A)

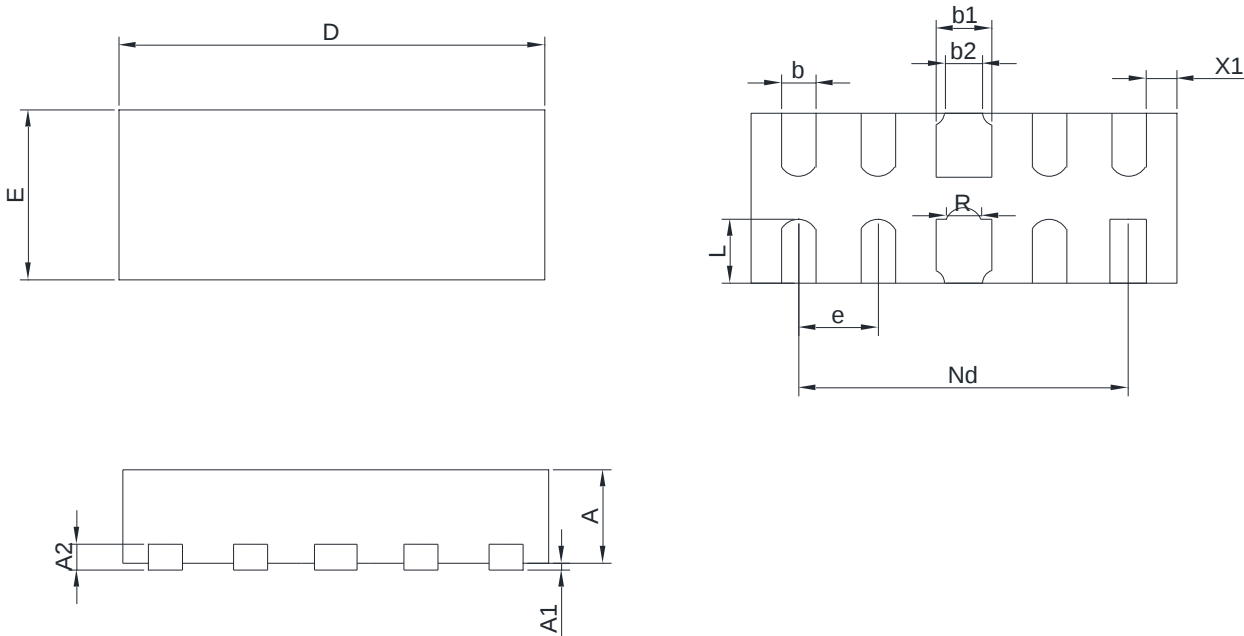

Dimensions in Millimeter(mm)					
SYMBOL	MIN	MAX	SYMBOL	MIN	MAX
A	0.50	0.60	b2	0.20REF	
A1	0.00	0.05	D	2.45	2.55
A2	0.15REF		E	0.95	1.05
b	0.15	0.25	L	0.33	0.43
b1	0.35	0.45	e	0.50BSC	
Nd	2.00BSC		X1	0.22	0.28

10.Recommended Soldering Footprint

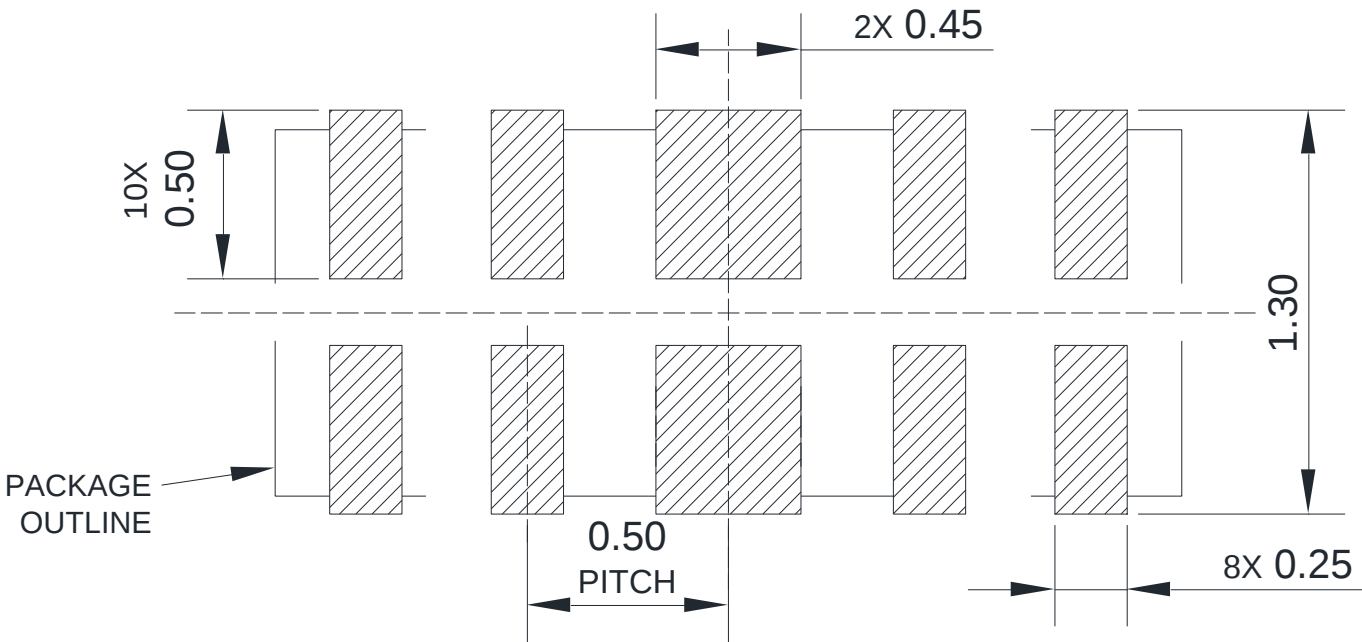

DIMENSIONS: MILLIMETERS

DISCLAIMER

ELECSUPER PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with ElecSuper products. You are solely responsible for

- (1) selecting the appropriate ElecSuper products for your application;
- (2) designing, validating and testing your application;
- (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements.

These resources are subject to change without notice. ElecSuper grants you permission to use these resources only for development of an application that uses the ElecSuper products described in the resource. Other reproduction and display of these resources are prohibited. No license is granted to any other ElecSuper intellectual property right or to any third party intellectual property right. ElecSuper disclaims responsibility for, and you will fully indemnify ElecSuper and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources. ElecSuper's products are provided subject to ElecSuper's Terms of Sale or other applicable terms available either on www.elecsuper.com or provided in conjunction with such ElecSuper products. ElecSuper's provision of these resources does not expand or otherwise alter ElecSuper's applicable warranties or warranty disclaimers for ElecSuper products.