

SuperMOS –SOP8 -20V BV_{DSS}, 11mΩ R_{DS(ON)}, P-channel MOSFET

1. Description

The ESS2022A is P-Channel enhancement MOS Field Effect Transistor. Uses advanced trench technology and design to provide excellent R_{DS(ON)} with low gate charge. Device is suitable for use in DC-DC conversion, power switch and charging circuit. Standard Product ESS2022A is Pb-free.

2. Features

- -20V, R_{DS(ON)}=11mΩ(Typ.) @V_{GS}=-4.5V
- R_{DS(ON)}=14mΩ(Typ.) @V_{GS}=-2.5V
- High density cell design for low R_{DS(on)}
- Material: Halogen free
- Reliable and rugged
- Avalanche Rated
- Low leakage current

3. Applications


- PWM applications
- Load switch
- Power management in portable/desktop PCs
- DC/DC conversion

100% UIS TESTED

4. Ordering Information

Part Number	Package	Marking	Material	Packing	Quantity per reel	Flammability Rating	Reel Size
ESS2022A	SOP8	PE02R13/LOT	Halogen free	Tape & Reel	3,000 PCS	UL 94V-0	13 inches

5. Pin Configuration and Functions

Pin	Function	Outline	Circuit Diagram
4	Gate	Note 1 	
1/2/3	Source		
5/6/7/8	Drain		

Note1:

This diagram is only an electrical schematic, and the actual pin size is based on POD.

6. Specification

Absolute Maximum Rating & Thermal Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter		Symbol	Limit	Unit
Drain-Source Voltage		BV_{DSS}	-20	V
Gate-Source Voltage		V_{GS}	± 10	V
Continuous Drain Current	$T_A=25^{\circ}\text{C}$	I_D	-11	A
	$T_A=100^{\circ}\text{C}$		-7	
Maximum Power Dissipation		P_D	3.1	W
Pulsed Drain Current		I_{DM}	-44	A
Operating Junction Temperature		T_J	150	$^{\circ}\text{C}$
Lead Temperature		T_L	260	$^{\circ}\text{C}$
Storage Temperature Range		T_{stg}	-55 to 150	$^{\circ}\text{C}$

Thermal resistance ratings

Single Operation				
Parameter	Symbol	Typical	Maximum	Unit
Junction-to-Ambient Resistance	$R_{\theta JA}$		40	$^{\circ}\text{C/W}$

Electrical Characteristics

At TA = 25°C unless otherwise specified

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
OFF CHARACTERISTICS						
Drain-to-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =-250uA	-20			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =-20V, V _{GS} =0V			-1	uA
Gate-to-source Leakage Current	I _{GSS}	V _{DS} =0V, V _{GS} =±10V			±100	nA
ON CHARACTERISTICS						
Gate Threshold Voltage	V _{GS(TH)}	V _{GS} =V _{DS} , I _D =-250uA	-0.4	-0.65	-1.0	V
Drain-to-source On-resistance	R _{DS(on)}	V _{GS} =-4.5V, I _D =-10A		11	17	mΩ
		V _{GS} =-2.5V, I _D =-6.5A		14	21	
CHARGES, CAPACITANCES AND GATE RESISTANCE						
Input Capacitance	C _{ISS}	V _{GS} =0V, f=1MHz, V _{DS} =-10V		2110		pF
Output Capacitance	C _{OSS}			275		
Reverse Transfer Capacitance	C _{RSS}			235		
Total Gate Charge	Q _{G(TOT)}	V _{GS} =-4.5V, V _{DS} =-10V, I _D =-10A		28		nC
Gate-to-Source Charge	Q _{GS}			4		
Gate-to-Drain Charge	Q _{GD}			7		
SWITCHING CHARACTERISTICS						
Turn-On Delay Time	t _{d(ON)}	V _{GS} =-4.5V, V _{DS} =-10V, I _D =-10A, R _G =3Ω		9.5		ns
Rise Time	t _r			15		
Turn-Off Delay Time	t _{d(OFF)}			40		
Fall Time	t _f			35		
BODY DIODE CHARACTERISTICS						
Forward Voltage	V _{SD}	V _{GS} =0V, I _S =-10A			-1.5	V

7. Typical Characteristic

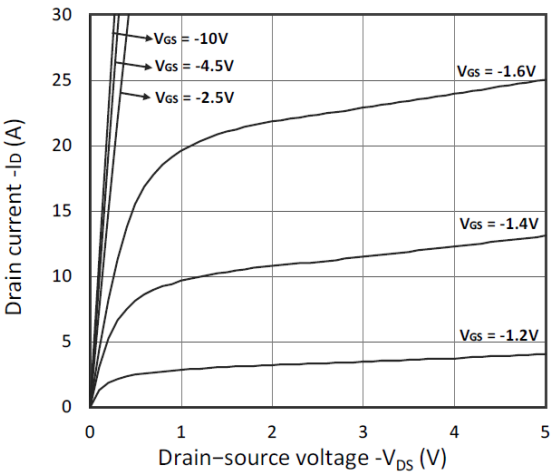


Figure 1. Output Characteristics

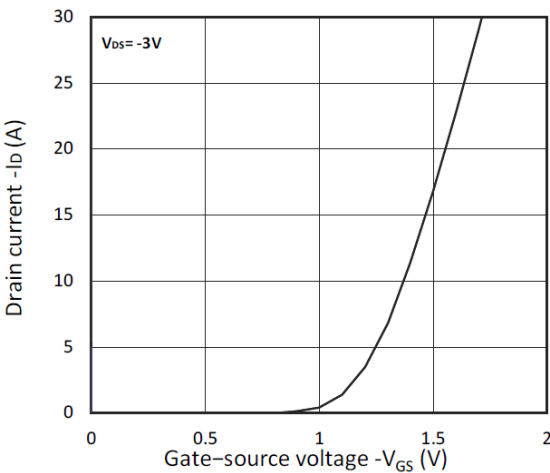


Figure 2. Transfer Characteristics

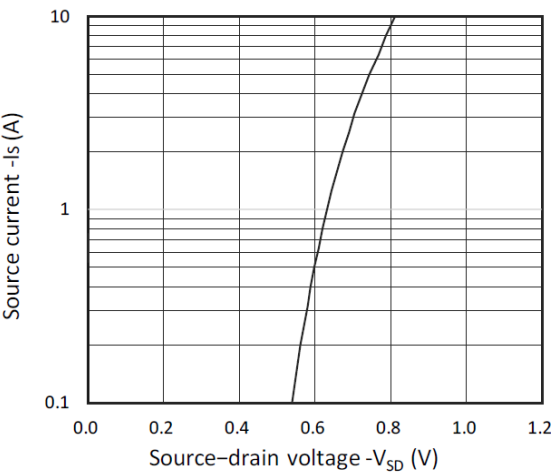


Figure 3. Forward Characteristics of Reverse

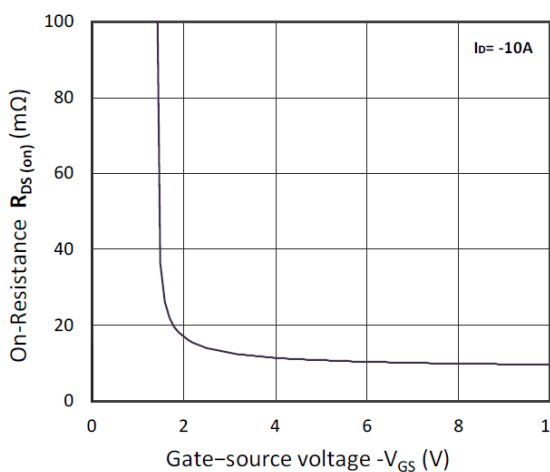


Figure 4. $R_{DS(on)}$ vs. V_{GS}

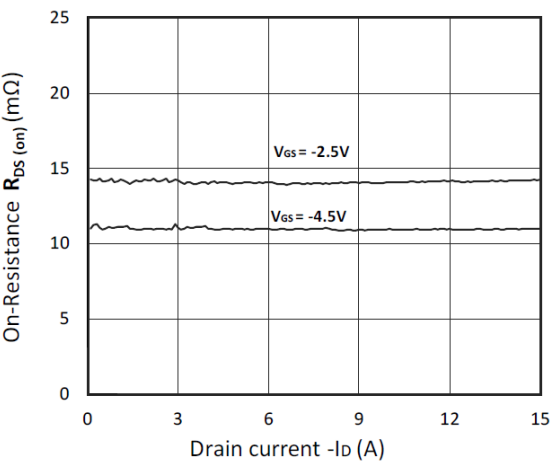


Figure 5. $R_{DS(on)}$ vs. I_D

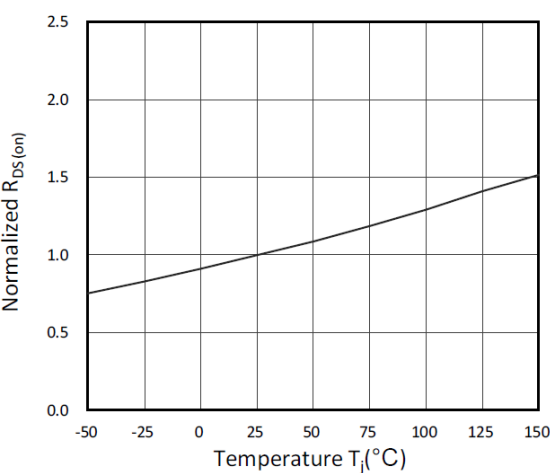


Figure 6. Normalized $R_{DS(on)}$ vs. Temperature


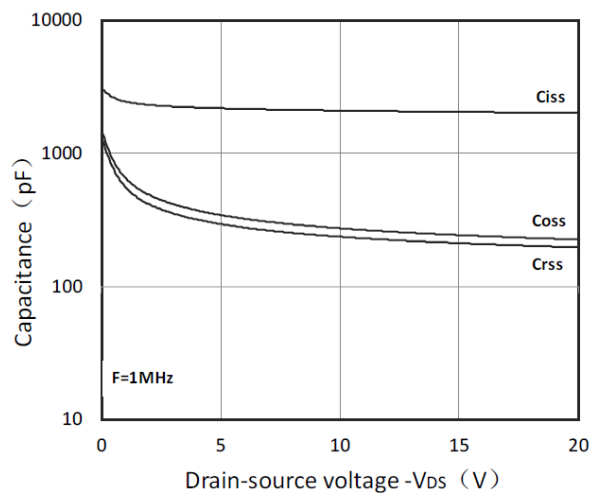


Figure 7. Capacitance Characteristics

8. Dimension (SOP8)


POD A(Y)

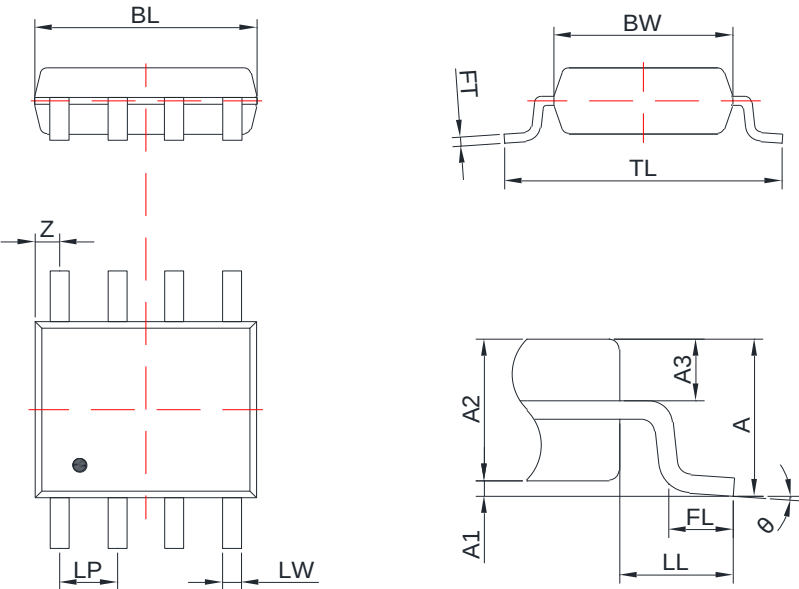

COMMON DIMENSIONS: UNITS OF MEASURE=MILLIMETER

Symbol	Dimensions		Symbol	Dimensions	
	Min.	Max.		Min.	Max.
A	1.75		FL	0.50	0.80
A1	0.05	0.15	LP	1.25	1.30
A2	1.40	1.50	LL	1.1 BSC	
A3	0.623 BSC		LW	0.38	0.43
BL	4.92	5.08	TL	5.90	6.10
BW	3.70	4.10	Z	0.54	
FT	0.20	0.21	θ	0°	8°


POD B(C)

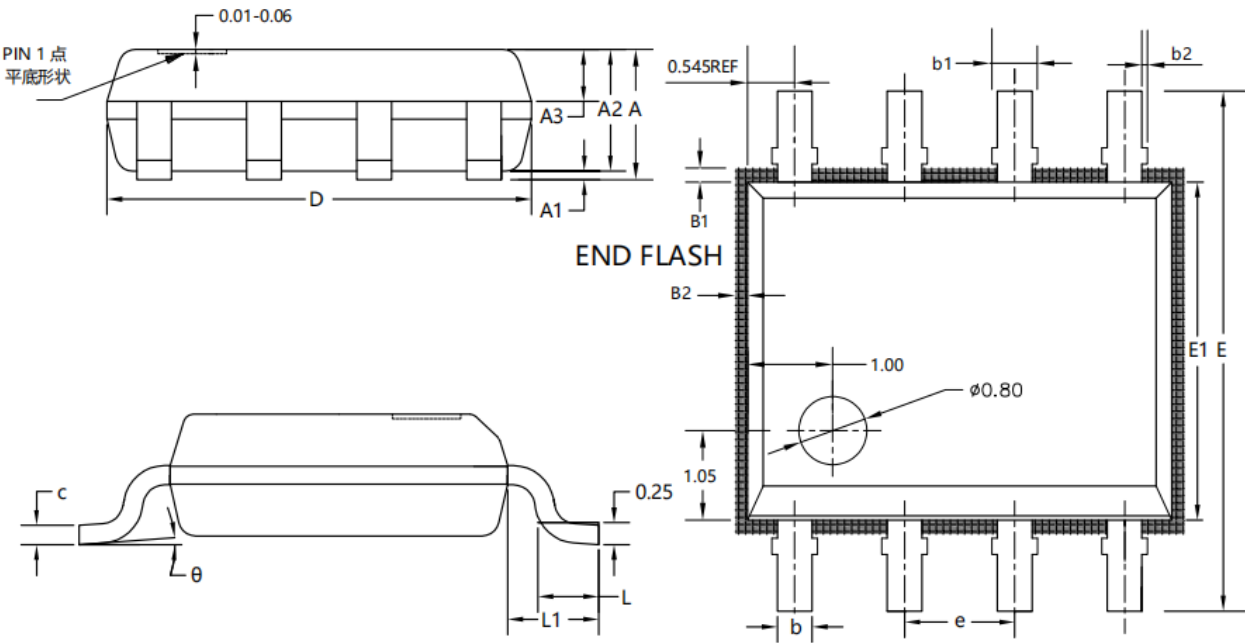

COMMON DIMENSIONS: UNITS OF MEASURE=MILLIMETER


Symbol	Dimensions			Symbol	Dimensions		
	Min.	NOM.	Max.		Min.	NOM.	Max.
A	1.55	1.65	1.75	L	0.50	0.60	0.70
A1	0.06	0.11	0.16	L1	0.90	1.05	1.20
A2	1.35	1.45	1.55	θ	0°	4°	8°
A3	0.60	0.70	0.80	B1	0.14MAX		
b	0.30	0.40	0.50	B2	0.12MAX		
c	0.17	0.20	0.25	b1	0.66MAX		
D	4.80	4.90	5.00	b2	0	0.04	0.08
E	5.80	6.00	6.20	e	1.27BSC		
E1	3.80	3.90	4.00				

POD C(X)

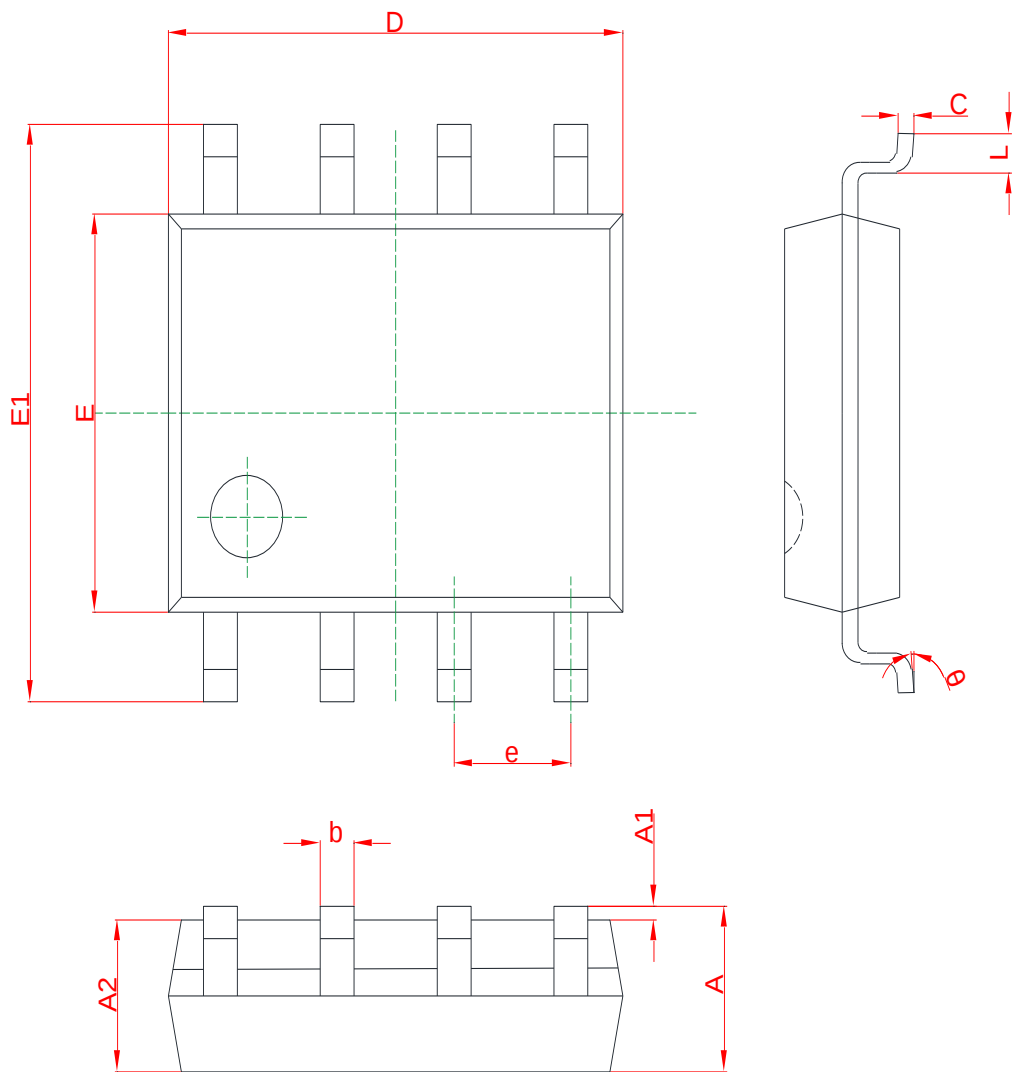

Symbol	Dimensions		Symbol	Dimensions	
	Min.	Max.		Min.	Max.
L	0.40	0.60	e	1.27 TYP	
D	4.95	5.05	c	0.15	0.25
E	3.8	4.0	A2	1.33	1.50
E1	5.80	6.20	A1	0.04	0.20
b	0.4 TYP		θ	0°	8°

9. Recommended Soldering Footprint

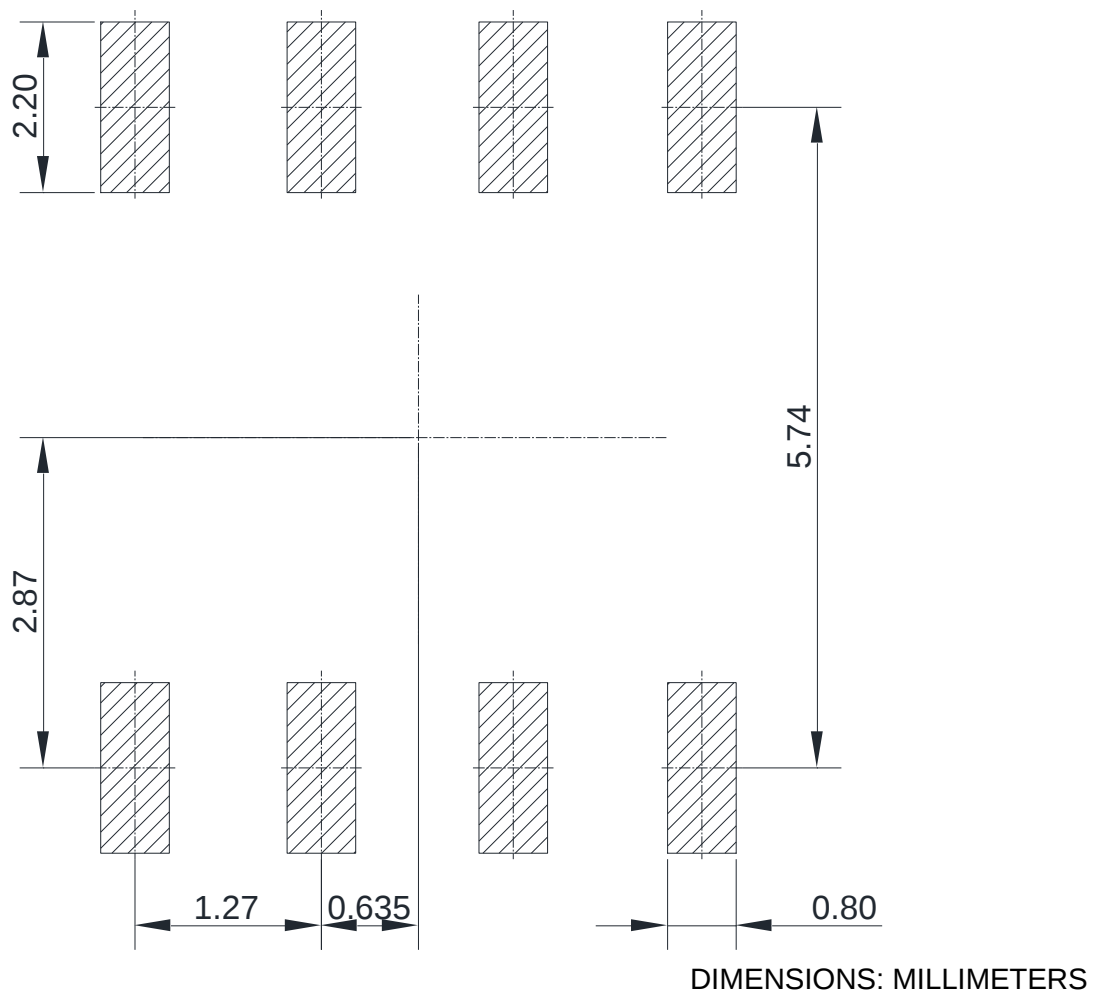

DISCLAIMER

ELECSUPER PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with ElecSuper products. You are solely responsible for

(1) selecting the appropriate ElecSuper products for your application;

(2) designing, validating and testing your application;

(3) ensuring your application meets applicable standards, and any other safety, security, or other requirements.

These resources are subject to change without notice. ElecSuper grants you permission to use these resources only for development of an application that uses the ElecSuper products described in the resource. Other reproduction and display of these resources are prohibited. No license is granted to any other ElecSuper intellectual property right or to any third party intellectual property right. ElecSuper disclaims responsibility for, and you will fully indemnify ElecSuper and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources. ElecSuper's products are provided subject to ElecSuper's Terms of Sale or other applicable terms available either on www.elecsuper.com or provided in conjunction with such ElecSuper products. ElecSuper's provision of these resources does not expand or otherwise alter ElecSuper's applicable warranties or warranty disclaimers for ElecSuper products.