

SuperMOS – SOT-23 30V BV_{DSS}, 21mΩ R_{DS(ON)}, N-channel MOSFET

1. Description

The ESLM3400 is N-Channel enhancement MOS Field Effect Transistor. Uses advanced trench technology and design to provide excellent R_{DS(ON)} with low gate charge. Device is suitable for use in DC-DC conversion, power switch and charging circuit. Standard Product ESLM3400 is Pb-free.

2. Features

- 30V, R_{DS(ON)}=21mΩ(TYP.) @V_{GS}=10V
R_{DS(ON)}=25mΩ(TYP.) @V_{GS}=4.5V
- Use trench MOSFET technology
- High density cell design for low R_{DS(on)}
- Material : Halogen free
- Reliable and rugged
- Avalanche Rated
- Low leakage current

3. Applications

- PWM applications
- Load switch
- Power management in portable/desktop PCs
- DC/DC conversion

4. Ordering Information

Part Number	Package	Marking	Material	Packing	Quantity per reel	Flammability Rating	Reel Size
ESLM3400	SOT-23	R0	Halogen free	Tape & Reel	3,000 PCS	UL 94V-0	7 inches

Table-1 Ordering information

5. Pin Configuration and Functions



Pin	Function	Outline	Circuit Diagram
1	Gate		
2	Source		
3	Drain		

Table-2 Pin configuration

6. Specification

Absolute Maximum Rating & Thermal Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Parameter		Symbol	Limit	Unit
Drain-Source Voltage		BV_{DSS}	30	V
Gate-Source Voltage		V_{GS}	± 12	V
Continuous Drain Current ^a	$T_A=25^{\circ}\text{C}$	I_D	5.8	A
	$T_A=70^{\circ}\text{C}$		4.6	
Maximum Power Dissipation ^a	$T_A=25^{\circ}\text{C}$	P_D	1.4	W
	$T_A=70^{\circ}\text{C}$		0.9	
Pulsed Drain Current ^b		I_{DM}	30	A
Operating Junction Temperature		T_J	150	$^{\circ}\text{C}$
Lead Temperature		T_L	260	$^{\circ}\text{C}$
Storage Temperature Range		T_{stg}	-55 to 150	$^{\circ}\text{C}$

Thermal resistance ratings

Single Operation					
Parameter		Symbol	Typical	Maximum	Unit
Junction-to-Ambient Thermal Resistance ^a	$t \leq 10 \text{ s}$	$R_{\theta JA}$	75	90	$^{\circ}\text{C/W}$
Junction-to-Case Thermal Resistance	Steady State	$R_{\theta JC}$	43	70	

Note:

a: Surface mounted on FR4 Board using 1 square inch pad size, 1oz copper

b: Repetitive rating, pulse width limited by junction temperature, $t_p=10\mu\text{s}$, Duty Cycle=1%

Electrical Characteristics

At TA = 25°C unless otherwise specified

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
OFF CHARACTERISTICS						
Drain-to-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =250uA	30			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =24V, V _{GS} =0V			1	uA
Gate-to-source Leakage Current	I _{GSS}	V _{DS} =0V, V _{GS} =±12V			±100	nA
ON CHARACTERISTICS						
Gate Threshold Voltage	V _{GS(TH)}	V _{GS} =V _{DS} , I _D =250uA	0.6	1.0	1.3	V
Drain-to-source On-resistance	R _{DS(on)}	V _{GS} =10V, I _D =5.8A		21.0	28.0	mΩ
		V _{GS} =4.5V, I _D =5.0A		25.0	33.0	
		V _{GS} =2.5V, I _D =3.0A		33.0	51.0	
Forward Trans conductance	g _{FS}	V _{DS} =5.0V, I _D =5.8A		7.8	15	S
CHARGES, CAPACITANCES AND GATE RESISTANCE						
Input Capacitance	C _{ISS}	V _{GS} =0V, f=1MHz, V _{DS} =10V		550		pF
Output Capacitance	C _{OSS}			62		
Reverse Transfer Capacitance	C _{RSS}			48		
Total Gate Charge	Q _{G(TOT)}	V _{GS} =4.5V, V _{DS} =10V, I _D =5.8A		6.7		nC
Threshold Gate Charge	Q _{G(TH)}			0.75		
Gate-to-Source Charge	Q _{GS}			1.65		
Gate-to-Drain Charge	Q _{GD}			1.78		
SWITCHING CHARACTERISTICS						
Turn-On Delay Time	t _{d(ON)}	V _{GS} =4.5V, V _{DS} =10V, R _L =10Ω, R _G =6Ω		3.8		ns
Rise Time	t _r			13.0		
Turn-Off Delay Time	t _{d(OFF)}			14.2		
Fall Time	t _f			2.0		
BODY DIODE CHARACTERISTICS						
Forward Voltage	V _{SD}	V _{GS} =0V, I _S =1.0A		0.75	1.5	V

7. Typical Characteristic

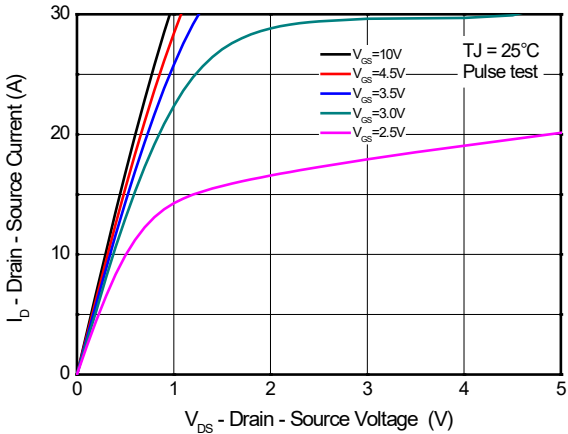


Figure 1. Typ. Output

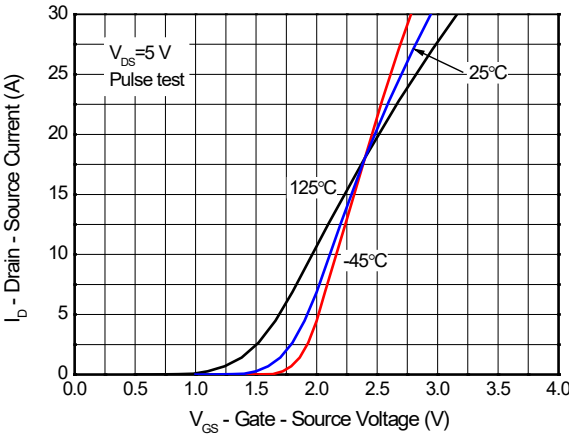


Figure 2. Transfer Characteristics

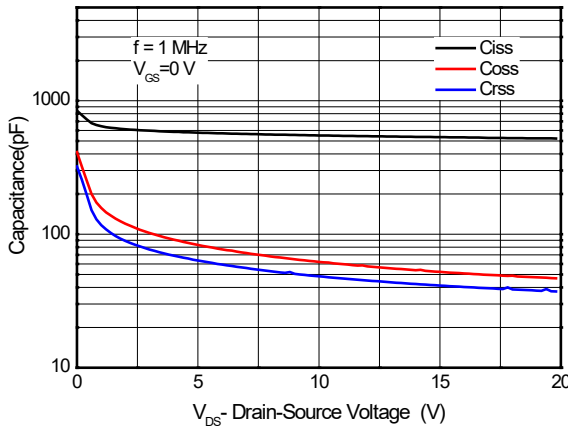


Figure 3. Capacitance Characteristics

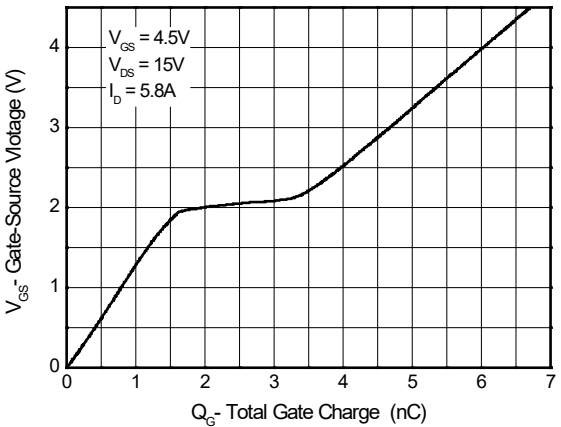


Figure 4. Gate Charge Waveform

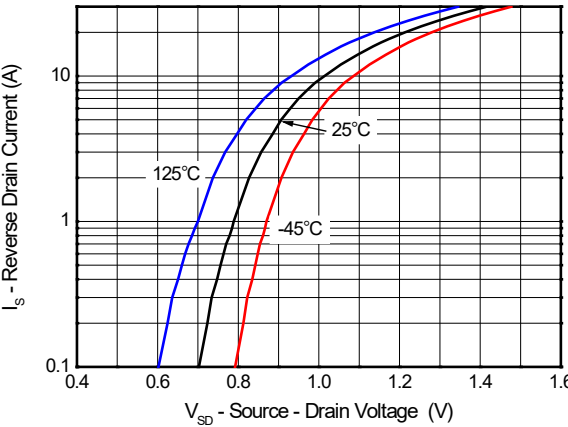


Figure 5. Body-Diode Characteristics

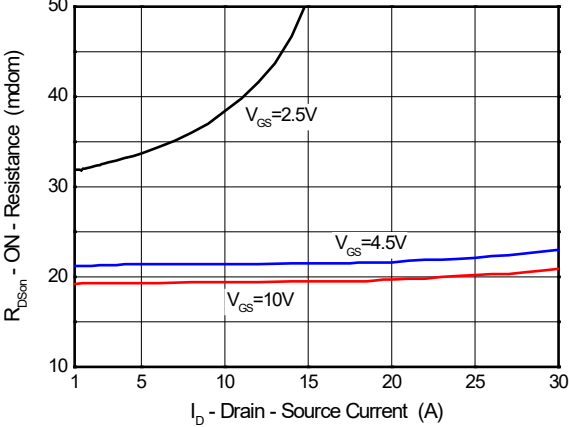


Figure 6. $R_{ds(on)}$ -Drain Current

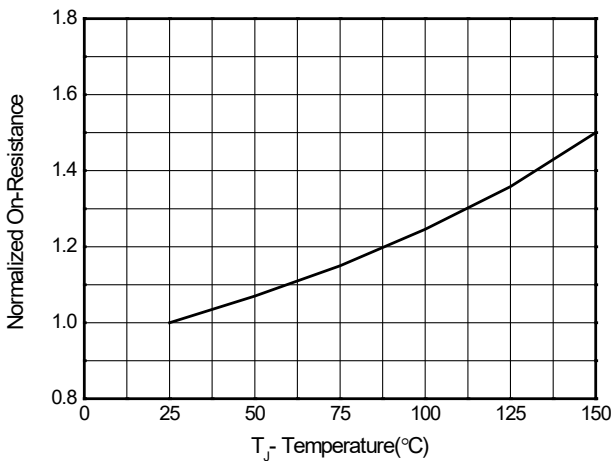


Figure 7. Rdson-Junction Temperature($^{\circ}$ C)

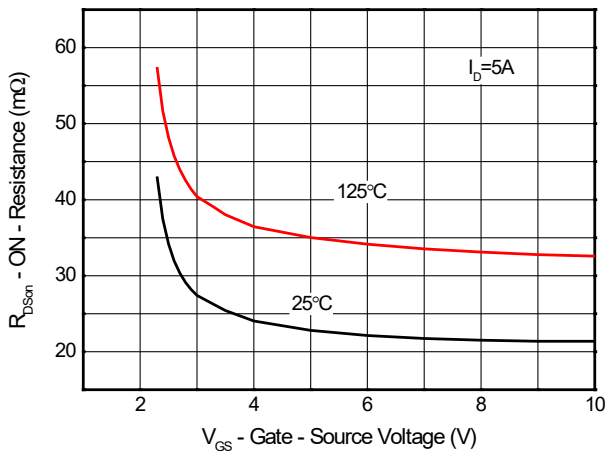


Figure 8: On-Resistance vs. Gate-Source

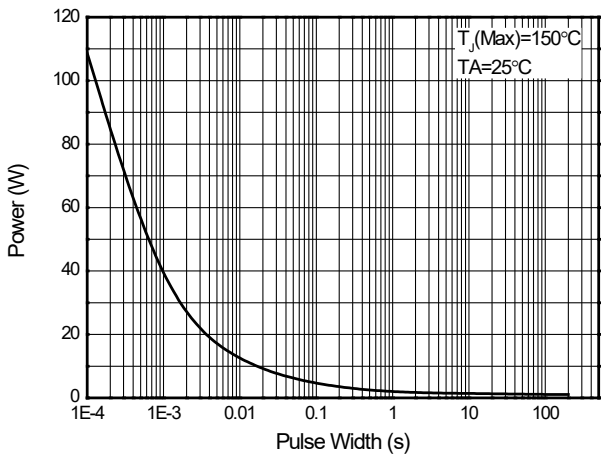


Figure 9: Single Pulse Power Rating Junction-to-Ambient (Note E)


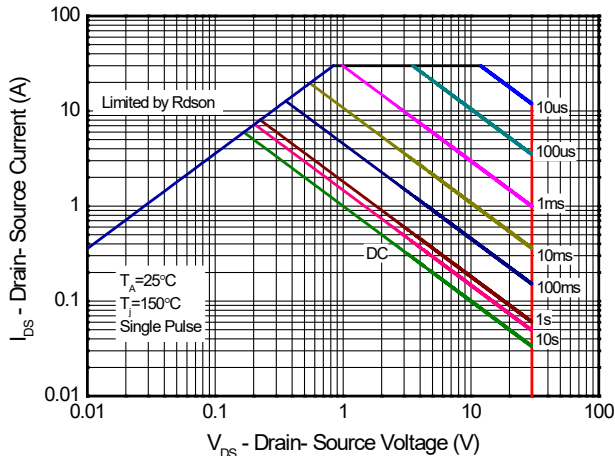


Figure 10. Maximum Safe Operation Area

8. Dimension (SOT-23)

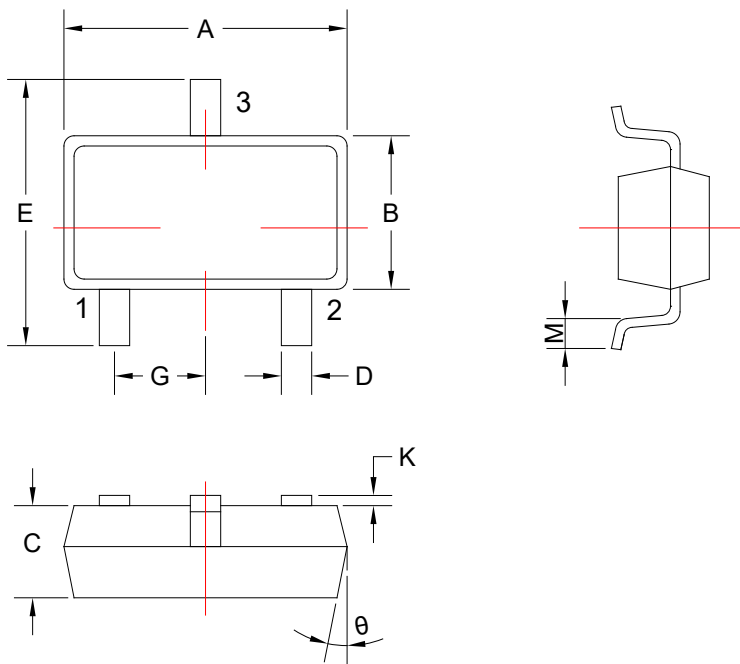

COMMON DIMENSIONS CUNITS MEASURE=MILLIMETER					
SYMBOL	MIN	MAX	SYMBOL	MIN	MAX
A	2.82	3.02	G	0.95 TYP	
B	1.50	1.70	K	0	0.10
C	1.05	1.15	M	0.20	-
D	0.30	0.50	θ	7°	11°
E	2.65	2.95			

DISCLAIMER

ELECSUPER PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with ElecSuper products. You are solely responsible for

- (1) selecting the appropriate ElecSuper products for your application;
- (2) designing, validating and testing your application;
- (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements.

These resources are subject to change without notice. ElecSuper grants you permission to use these resources only for development of an application that uses the ElecSuper products described in the resource. Other reproduction and display of these resources are prohibited. No license is granted to any other ElecSuper intellectual property right or to any third party intellectual property right. ElecSuper disclaims responsibility for, and you will fully indemnify ElecSuper and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources. ElecSuper's products are provided subject to ElecSuper's Terms of Sale or other applicable terms available either on www.elecsuper.com or provided in conjunction with such ElecSuper products. ElecSuper's provision of these resources does not expand or otherwise alter ElecSuper's applicable warranties or warranty disclaimers for ElecSuper products.