


Specification

Part No. : **LLP.5875.Y.A.30**

Description : LTCC Low Pass Filter for 5875MHz
2.0x1.25x0.95mm, Bandwidth 725MHz

Features : Cutoff Frequency 5875 MHz
Low Insertion Loss
Low Pass Band Ripple
High Attenuation
Ultra-Compact, Low Profile SMT Package

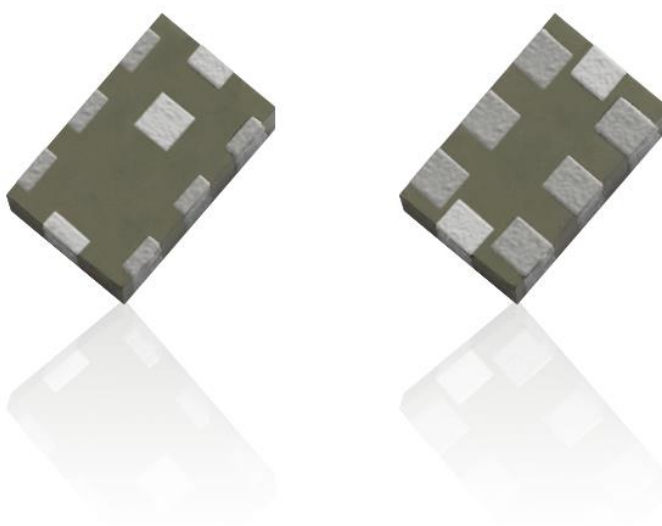

1. Introduction

Taoglas are utilizing their deep understanding of the RF component design and manufacturing process to provide high-quality, small-form-factor, cost-effective and easy to implement RF filters. The Taoglas Filters Division will feature a range of off-the-shelf filters for a variety of applications, including filters for emerging license free bands used for IoT and for GPS L1/L2 and L1/L5 applications. We can also work with customers to develop bespoke filter solutions.

Taoglas LTCC filters are designed to be used in wireless transmitters or receivers. They feature low insertion loss and provide good rejection of unwanted signals at harmonic frequencies for improved system performance. The product is manufactured as a multi-layer monolithic ceramic structure which provides high reliability in a lightweight, low-profile, industrial standard SMT package.

These small part sizes allow for high density PCB layout, provide excellent solderability, and allow for easy visual inspection capability.


The LBP.5875.Y.A.30 is a standard Taoglas product but can be customized for specific customer needs. For more information please contact your regional sales office.

2. Specification


Electrical	
Cutoff Frequency (Fo)	5512.5 MHz
Insertion Loss	0.6 dB max
Passband Ripple	0.5 dB max
Return loss	< -10 dB
Attenuation	> 15 dB @ 7500 MHz above
In/Out Impedance	50 Ω
Power Dissipation	1.0 W min.
Mechanical	
Dimension	2.0 x 1.25 x 0.95mm (L x W x H)
Material	Ceramic
Finish	Ag plated
Environmental	
Operating Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C
Moisture Sensitivity Level (MSL)	3 (168 Hours)

3. Characteristics Curve

3.1. Pass Band Return & Insertion Loss

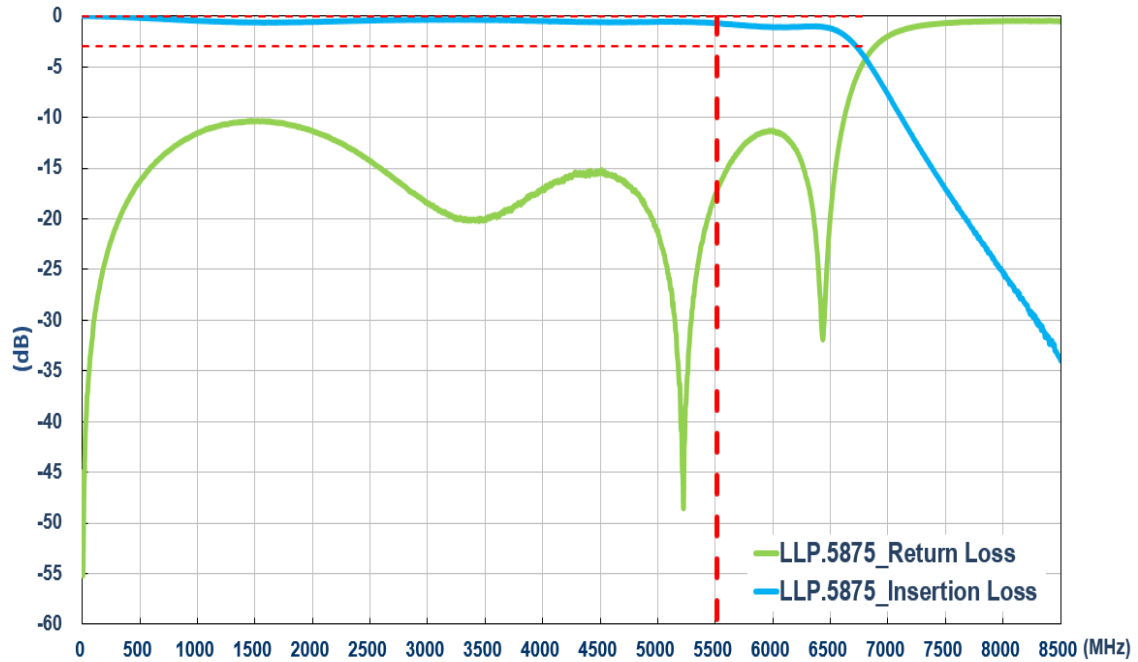


3.2. Out-Of-Band Attenuation

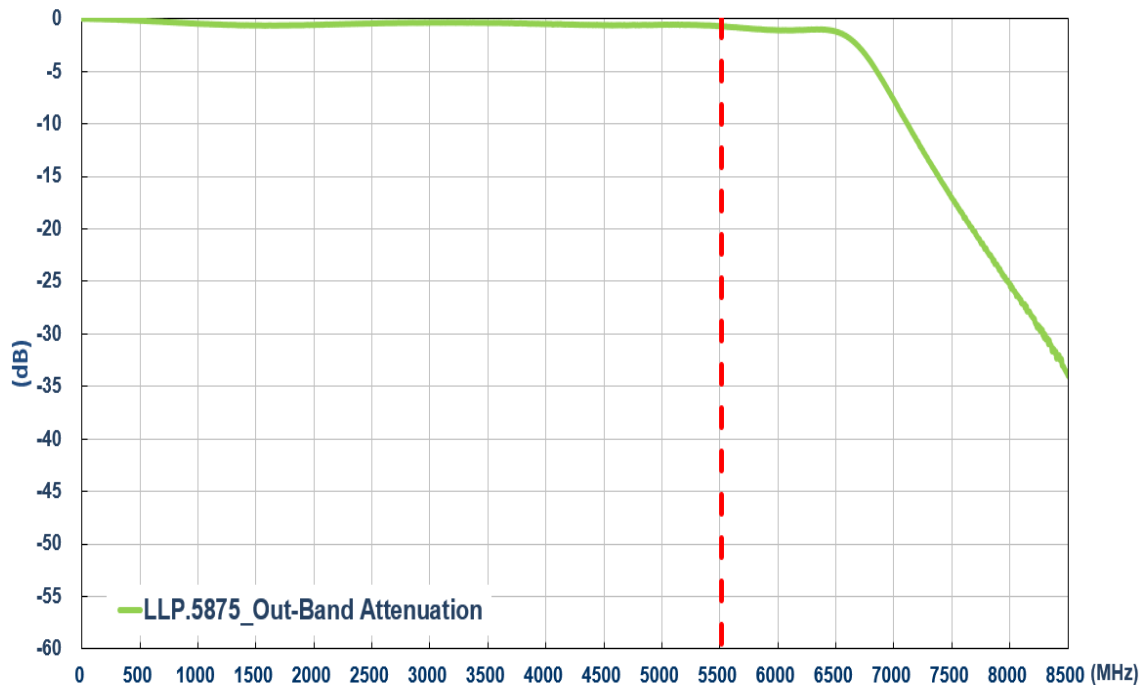


4. Mechanical Drawings (Unit: mm)

4.1. Antenna Drawing

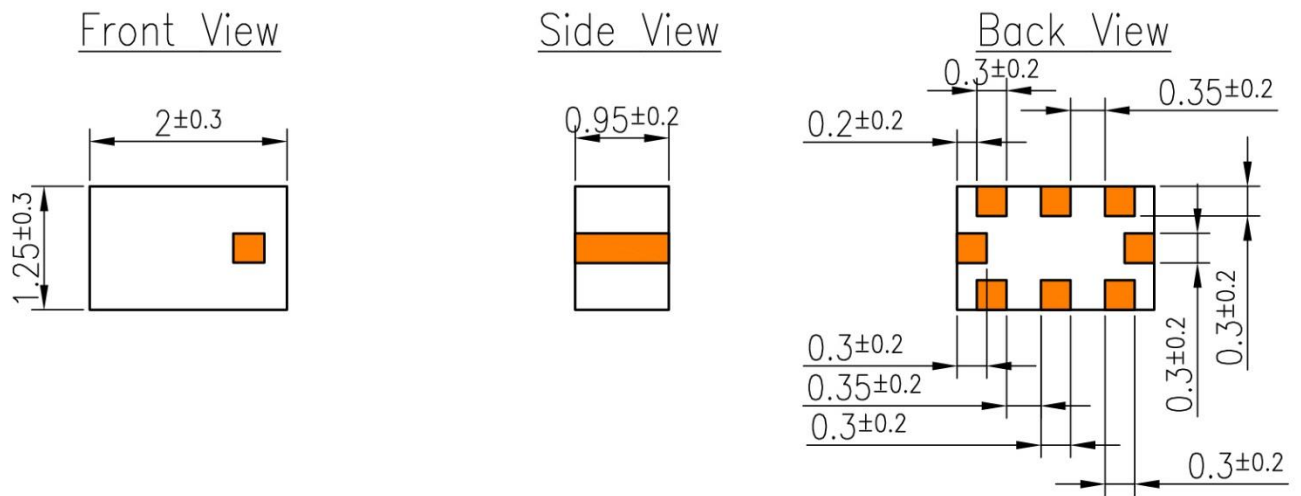


4.2. Recommended PCB Layout

4.2.1. Top Copper

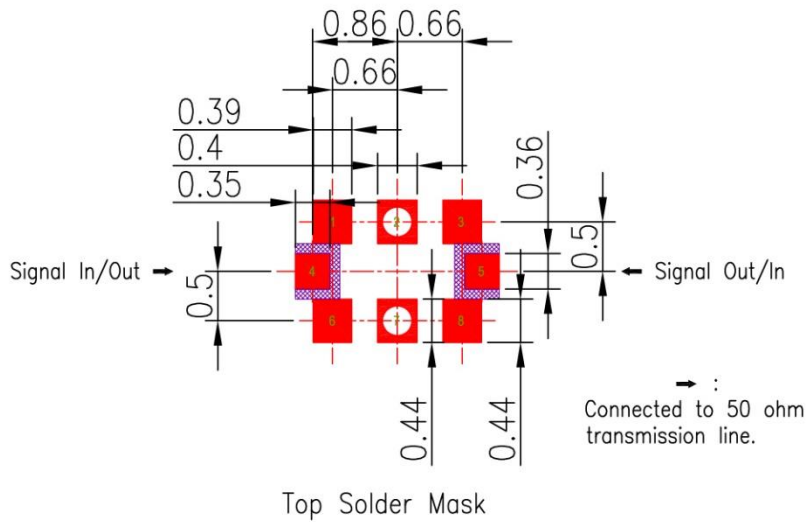

4.2.2. Top Solder Paste

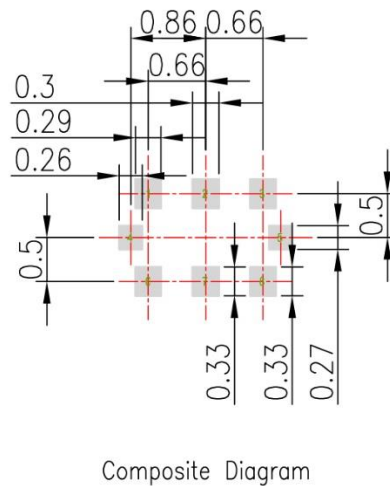


NOTE:

1. Ag Plated area
2. Solder Mask area
3. Copper area
4. Paste area
5. Copper Keepout Area




6. Any vias in pads should be either filled or tented to prevent solder from wicking away from the pad during reflow.
7. The dimension tolerances should follow standard PCB manufacturing guidelines

4.2.3. Top Solder Mask

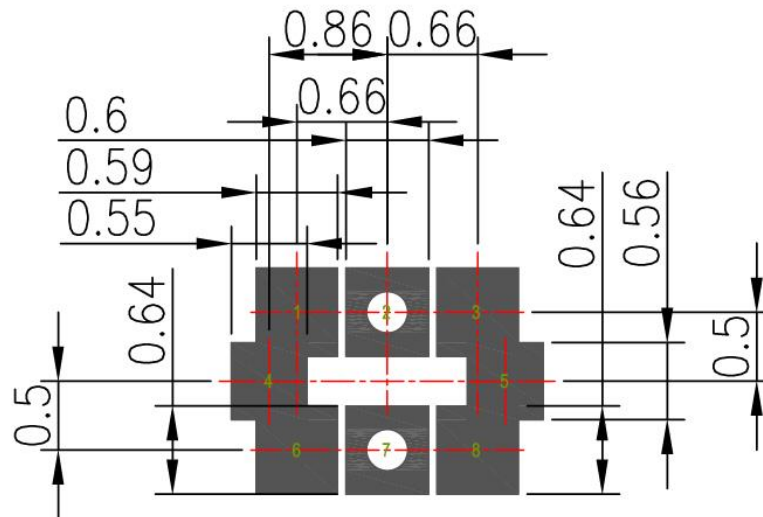

4.2.4. Composite Diagram

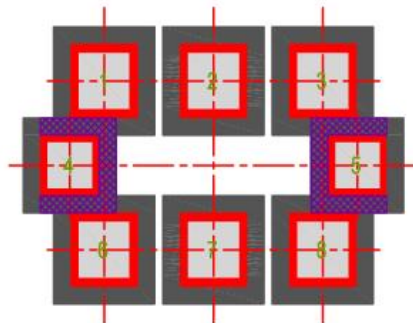


NOTE:

1. Ag Plated area
2. Solder Mask area
3. Copper area
4. Paste area
5. Copper Keepout Area



6. Any vias in pads should be either filled or tented to prevent solder from wicking away from the pad during reflow.
7. The dimension tolerances should follow standard PCB manufacturing guidelines

4.3. Evaluation Board

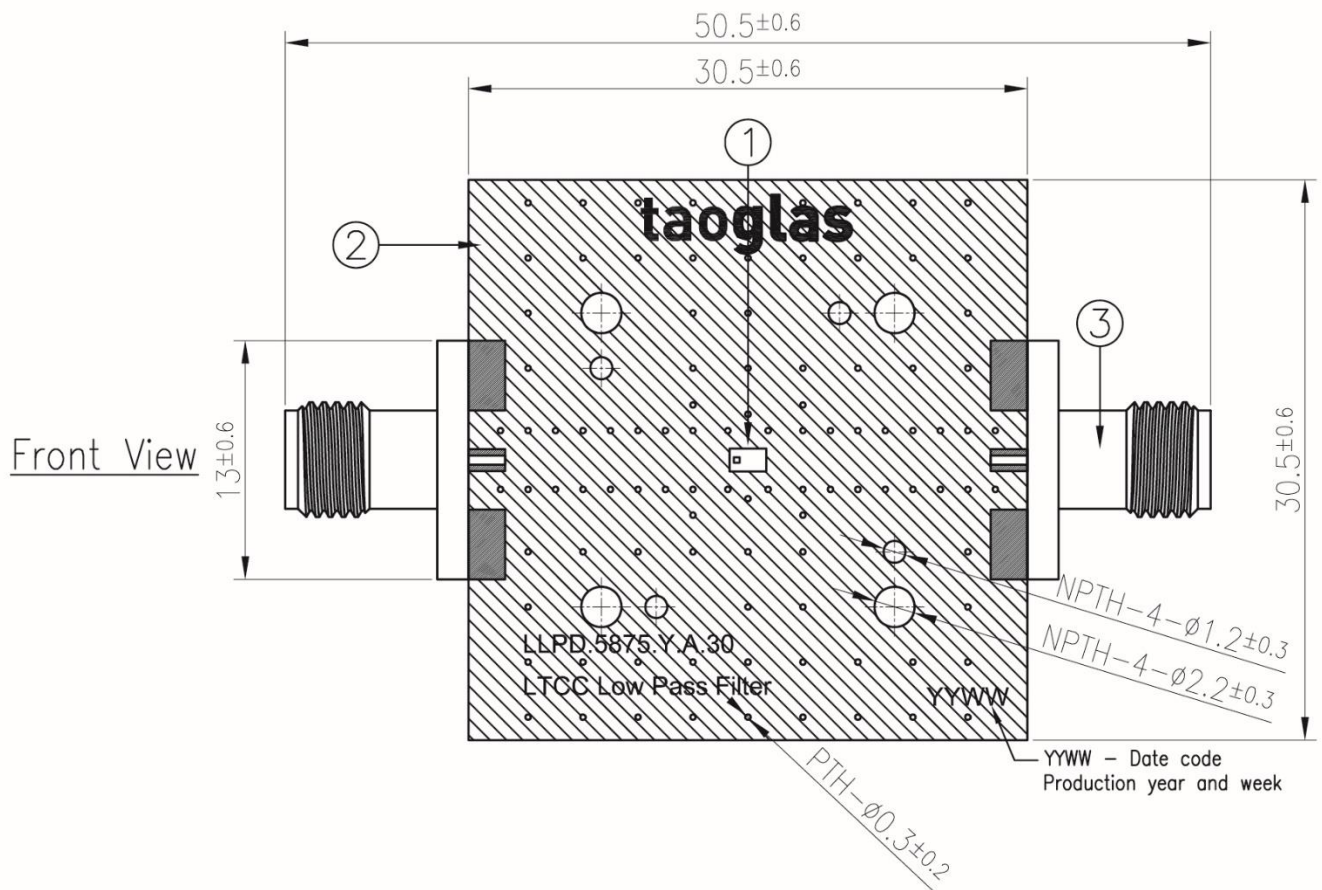


Note:

1. Soldered area 
2. Soldermask area(Black) 
3. Logo & Text Ink Printing : White

	Name	Material	Finish	QTY
1	Filter (2x1.25x0.95mm)	Ceramic	Clear	1
2	PCB	Composite 1.0t	Black	1
3	SMA(F) ST	Brass	Au Plated	2

5. Recommended Reflow Soldering Profile

The LLP.5875.Y.A.30 can be assembled by following the recommended soldering temperatures are as follows:

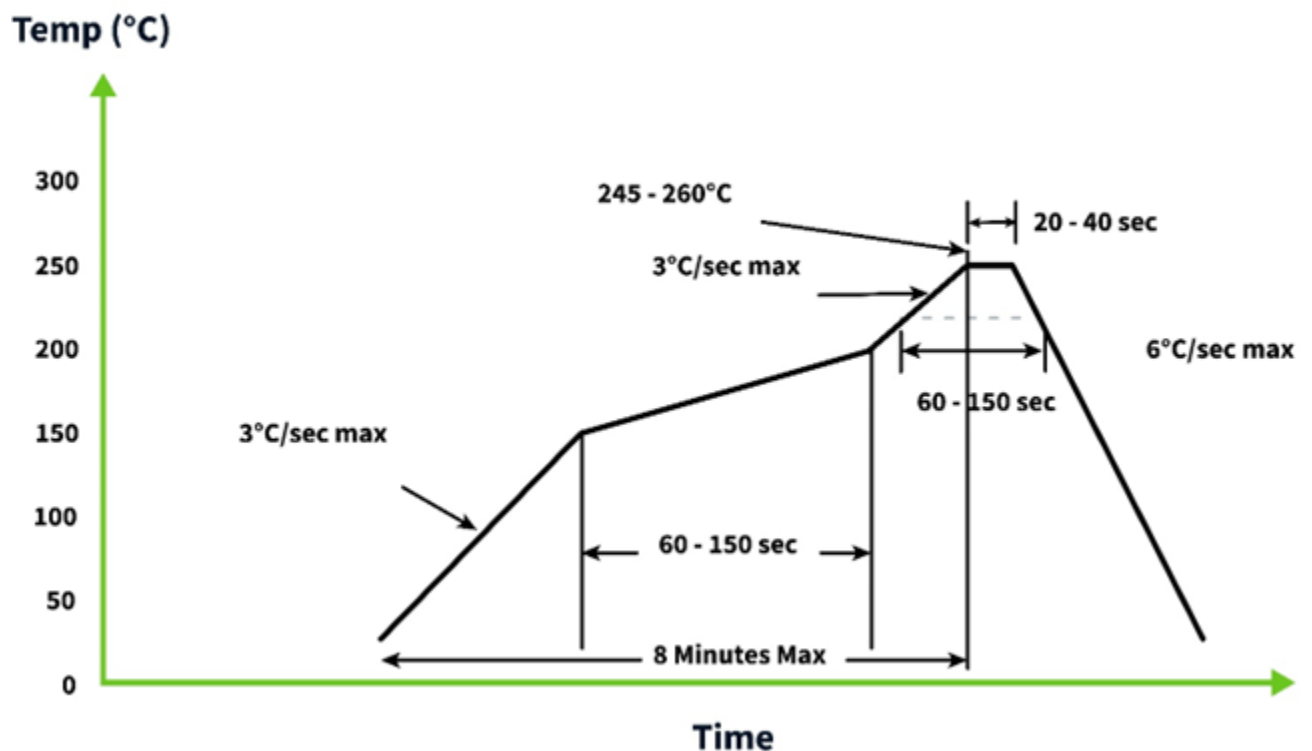


*Temperatures listed within a tolerance of +/- 10° C

Smaller components are typically mounted on the first pass, however, we do advise mounting the LLP.5875.Y.A.30 when placing larger components on the board during subsequent reflows.


Note: Soldering flux classified ROL0 under IPC J-STD-004 is recommended.

6. Packaging


4000 pc LLP.5875.Y.A.30
1 reel per small inner box
Dimensions - 178*8.5mm
Weight - 130g

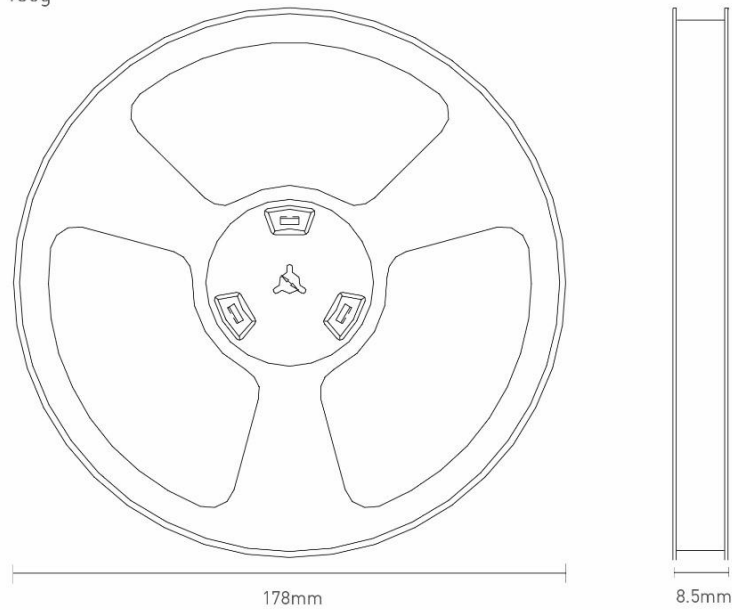

8000 pc LLP.5875.Y.A.30
2 reel in small inner box
Dimensions - 190*190*28
Weight - 0.3Kg

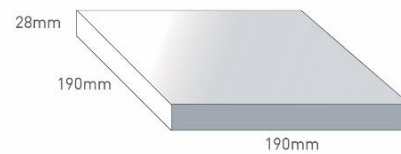

10 inner boxes / 80000 pcs in one carton
Carton Dimensions - 330*210*210mm
Weight - 3.3 Kg

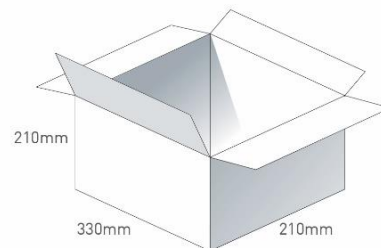

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.