

EMC/RFI line filter for lighting equipment



- Voltage rating up to 350 VAC
- Current rating 2 A, 5 A and 8 A
- Offers attenuation fitting to lighting application
- Compact, space-saving design
- Cable outlets with enhanced length give freedom for flexible installation



Technical Specifications

Maximum continuous operating voltage	350 VAC				
Nominal operating voltage	277 VAC				
Rated currents	2 A, 5 A and 8 A @ 60°C				
Operating frequency	DC to 60 Hz				
High potential test voltage	P -> PE 3000 VDC for 2 sec P -> N 1500 VDC for 2 sec				
Overvoltage category	II acc. IEC 60664-1				
Pollution degree	2 acc. IEC 60664-1				
Temperature range (operation and storage)	-40°C to 90°C (40/90/21)				
Certified to	UL 60939-3, CSA Std C22.2 No. 8, IEC/EN 60939-3, GB/T 15287, GB/T 15288				
MTBF (Mil-HB-217F)	>1,400,000 h @ 60°C/350 V				

Approvals & Compliances












Features and Benefits

- FN 2580 are specially developed for lighting application
- Offering high differential and common mode performance in low profile housing
- Cable outlets are flexible in terms of connection and make the assembly easy
- Voltage rating according to high voltage LED lighting market

Typical Applications

- Lighting Equipment
- LED Driver and displays
- Street Lamps and signage
- Industrial and architectural lighting
- Fluorescent ballasts
- Other applications with high demand for differential mode performance

Typical electrical schematic

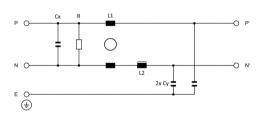

Filter Selection Table


Filter	Rated current	Leakage current*	Inductance**		Capacitance**		Dis. Resistor**	Weight
	@ 60°C	@ 350 VAC/60 Hz	L1	L2	Cx	Су	R	
	[A]	[mA]	[mH]	[uH]	[μ F]	[nF]	[kΩ]	[g]
FN 2580-2-07	2	0.66	1.56	78	0.165	5	1000	130
FN 2580-5-07	5	0.66	0.88	52	0.165	5	1000	140
FN 2580-8-07	8	0.66	0.49	35	0.165	5	1000	145


^{*} Maximum leakage under usual AC operating conditions (acc. IEC 60939-3). Note: if the neutral line is interrupted, worst case leakage could reach twice this


Typical Filter Attenuation

Per CISPR 17; DM=50 Ω /50 Ω sym, differential mode; CM=50 Ω /50 Ω asym, common mode

2 A type 5 A type 8 A type dΒ dΒ dΒ

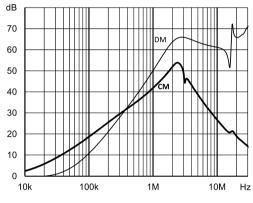


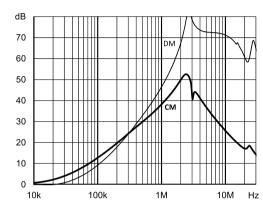

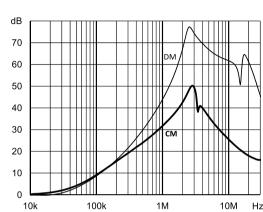


Mechanical Data

Side View

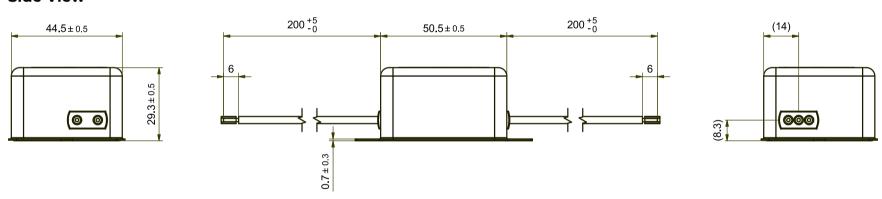



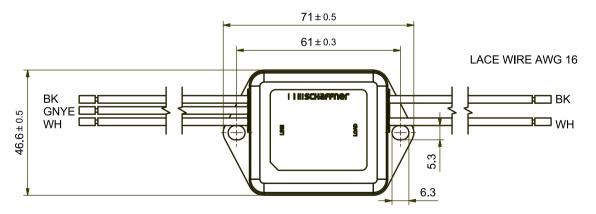

2 A: Lace Wire 18 AWG

5 A: Lace Wire 18 AWG

8 A: Lace Wire 16 AWG

WH = White; BK = Black; GNYE = Green Yellow

All dimensions in mm; 1 inch = 25.4 mm Tolerances according: ISO 2768-m/EN 22768-m

^{**} Tolerances apply: Inductance: -30/+50%, Capacitance: ±20%, Resistance: ±10%

Headquarters, Global Innovation and Development

Switzerland

Schaffner Group

Industrie Nord Nordstrasse 5 4542 Luterbach

+41 32 681 66 26

info@schaffner.com

To find your local partner within Schaffner's global network schaffner.com

© 2025 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifica-tionsw are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloa-ded from the Schaffner website. All trademarks recognized.

Sales and Application **Centers**

Finland

Schaffner Oy

Lohjanharjuntie 1109

08500

Lohja

+ 358 50 468 72 84

finlandsales@schaffner.com

France

Schaffner EMC S.A.S.

16-20 Rue Louis Rameau

95875

Bezons

+33 1 34 34 30 60

francesales@schaffner.com

Germany

Schaffner Deutschland GmbH

Ohiostr. 8 76149 Karlsruhe +49 721 56910

germanysales@schaffner.com

Schaffner EMC S.r.l.

Via Ticino, 30 20900 Monza (MB) +39 335 120 44 32

italysales@schaffner.com

Schaffner EMC K.K.

ISM Sangenjaya 7F 1-32-12 Kamiuma Setagaya-ku 154-0011

Tokyo

+81 3 5712 3650

japansales@schaffner.com

Singapore

Schaffner EMC Pte Ltd.

Blk 3015A Ubi Road 1 #05-09 Kampong Ubi Industrial Estate 408705 Singapore +65 63773283

singaporesales@schaffner.com

Sweden

Schaffner EMC AB

Östermalmstrorg 1 114 42 Stockholm

+46 8 5050 2425

swedensales@schaffner.com

Switzerland

Schaffner EMV AG

Industrie Nord Nordstrasse 5 4542 Luterbach

+41 32 681 66 26

switzerlandsales@schaffner.com

India

Schaffner India Pvt. Ltd

Regus World Trade Centre WTC 22nd Floor Unit No 2238 Brigade Gateway Campus 26/1 Dr. Rajkumar Road Malleshwaram (W) 560055 Bangalore

+91 8067935355

indiasales@schaffner.com

United Kingdom

Schaffner Ltd.

Suite 1 Oakmede Place Terrace Road RG42 4JF Binfield +44 118 9770070

schaffner.uksales@te.com

United States

Schaffner EMC Inc.

52 Mayfield Avenue Edison, New Jersey +1 732 225 9533 usasales@schaffner.com