

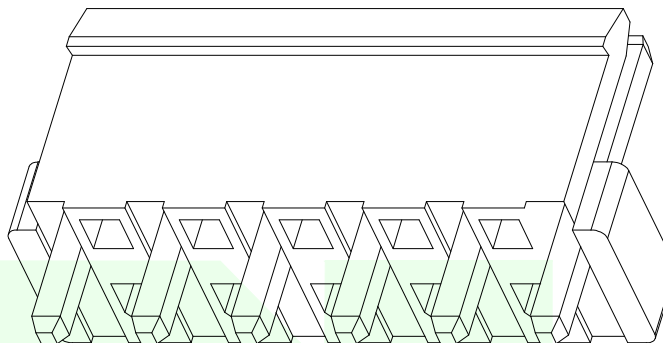
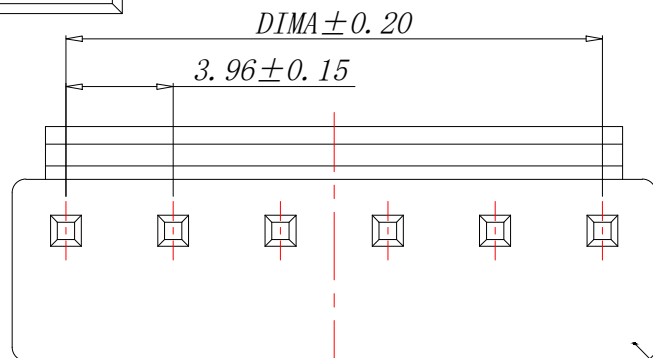
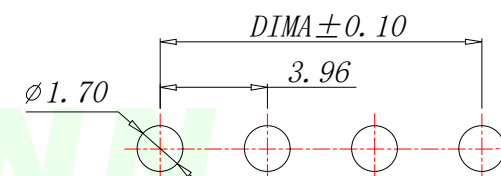


<i>VER</i>	<i>MARK</i>	<i>PR. BY</i>	<i>DESCRIPTTON</i>	<i>DATE</i>

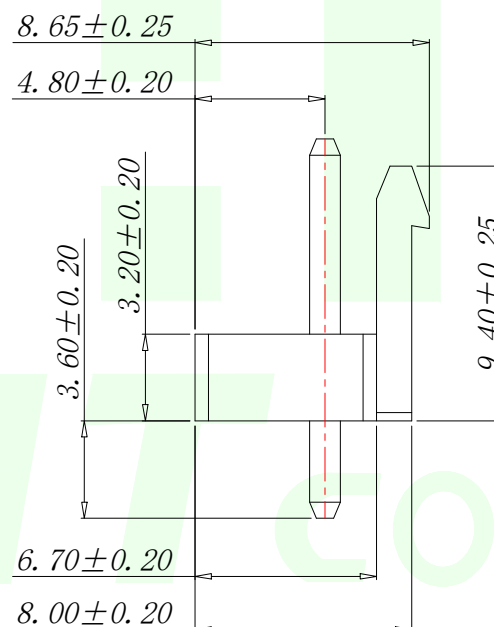

<i>Part No</i>	<i>Pin</i>	<i>A</i>	<i>B</i>
<i>W396111K-2PR2123</i>	<i>2</i>	<i>3. 96</i>	<i>7. 92</i>
<i>W396111K-3PR2123</i>	<i>3</i>	<i>7. 92</i>	<i>11. 88</i>
<i>W396111K-4PR2123</i>	<i>4</i>	<i>11. 88</i>	<i>15. 84</i>
<i>W396111K-5PR2123</i>	<i>5</i>	<i>15. 84</i>	<i>19. 80</i>
<i>W396111K-6PR2123</i>	<i>6</i>	<i>19. 80</i>	<i>23. 76</i>
<i>W396111K-7PR2123</i>	<i>7</i>	<i>23. 76</i>	<i>27. 72</i>
<i>W396111K-8PR2123</i>	<i>8</i>	<i>27. 72</i>	<i>31. 68</i>
<i>W396111K-9PR2123</i>	<i>9</i>	<i>31. 68</i>	<i>35. 64</i>
<i>W396111K-10PR2123</i>	<i>10</i>	<i>35. 64</i>	<i>39. 60</i>
<i>W396111K-11PR2123</i>	<i>11</i>	<i>39. 60</i>	<i>43. 56</i>
<i>W396111K-12PR2123</i>	<i>12</i>	<i>43. 56</i>	<i>47. 52</i>
<i>W396111K-13PR2123</i>	<i>13</i>	<i>47. 52</i>	<i>51. 48</i>
<i>W396111K-14PR2123</i>	<i>14</i>	<i>51. 48</i>	<i>55. 44</i>
<i>W396111K-15PR2123</i>	<i>15</i>	<i>55. 44</i>	<i>59. 40</i>
<i>W396111K-16PR2123</i>	<i>16</i>	<i>59. 40</i>	<i>63. 36</i>

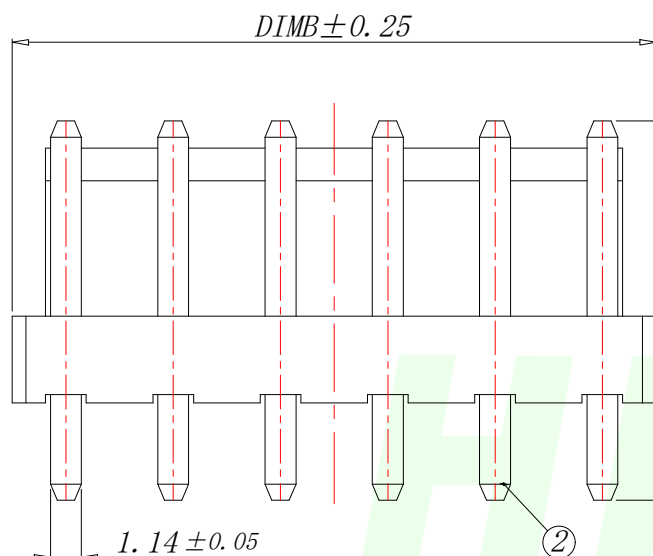


适用线路板 (PCB LAYOUT)

序号	品名	材质
1	VH3. 96 胶芯	PA66 UL94V-2 Red
2	VH3. 96 直针端子	Copper Alloy/ Tin Plating

Technical Index:

1. *Temperature range:* $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$.
2. *Rated voltage:* 250V DC/AC(rms).
3. *Rated current:* 7.0A.
4. *Contact resistance:* $\leq 20\text{m}\Omega$.
5. *Withstanding voltage:* 1500V AC/minute.
6. *Insulation resistance:* $\geq 1000\text{M}\Omega$.

GENERAL TOLERANCES UNLESS SPECIFIED		HMT CONN 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd			
X.° ±0.50	X.° ±5°	PART NO. W396111K-XPR2123		TITLE: VH3.96 直针	
X.X° ±0.20	X.X° ±3°	DESIGN: James		CUSTOMER	SIZE A4
X.XX° ±0.10	X.XX° ±1°	CHED: Talen			UNITS MM
MANUFACTURE DWG		APPD: Sophia			SCALE N:A
					SHEET 1/1