

客户名称: CUSTOMER							
我司料号: OUR PART NO.							
我司品名: OUR PART NAME	ET	ET24 COMMON MODE FILTER					
送样日期: DATE SAMPLES							
	制造确认 MANUFACTURER APPROVE						
拟制 DRA	WN	审核 CHEC	CKED	确认 APPROVED			
Hufangti	ng	ZhongCuilan					
客户确认 CUSTOMER APPROVE							
客户名称 CUSTOMER NAME:							
客户料号 CUSTOMER P/N:							
规格型号 DESCRIPTION: ET24 8MH 0.6 line horizontal							
检查結果: □	合格 □不合格 签名及盖章:			盖章:			
INSPECT RESU	INSPECT RESULT ACCEPT REJECT SIGNATURE AND STAMP						
说明 REMARK:	说明 REMARK:						

如对本承认书内容有异议请提出或标记发送至我司,本承认书在未收到异议回复时于本承认书提供一周后生效。

If you have any objection to the contents of this acknowledgment, please raise it or send the mark to us. The acknowledgment

will become effective one week after the acknowledgment is provided in the absence of any objection.

东莞市祥如电子有限公司

DONGGUAN XIANGRU ELECTRONICS CO., LTD

Tel: 0769-86346548 Fax: 0769-86346358

Email: dgxiangru@126.com



客户名称 CUSTOMER		日期 DATE	2024/5/29
客户物料编号 CUSTOMER P/N		客户规格型号 DESCRIPTION	ET24 8MH 0.6 line horizontal
我司物料编号 OUR PART NO	XRET24-8mH-H	我司品名 OUR PART NAME	ET24 COMMON MODE FILTER

## 修订记录 Revision record


日期 Date	修改内容 Modify the content	审核 Checked	确认 Approved
2023/10/27	首次发行First issue	ZhongCuilan	HuangChuang en




客户名称 CUSTOMER		日期 DATE	2024/5/29
客户物料编号		客户规格型号	ET24 8MH 0.6 line
CUSTOMER P/N		DESCRIPTION	horizontal
我司物料编号	XRET24-8mH-H	我司品名	ET24 COMMON MODE
OUR PART NO		OUR PART NAME	FILTER


外观尺寸 Appearance of size


单位 Unit: mm

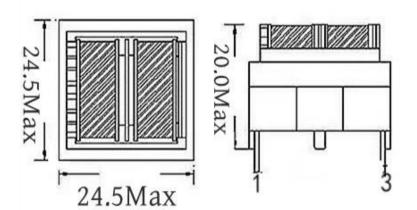

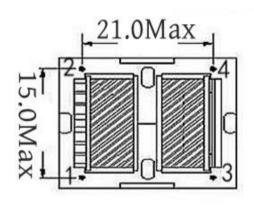

电路图 Schematic Diagram





绕线结构表 Winding Structure Diagram

绕组 WINDING	起始 S	结束 F	绝缘线/漆包线 WIRE	圈数 TURNS		绕制方式 WINDINGWAY	
N1	1	2	2UEW Φ0.6mm	32TS	Circle		
N2	3	4	2UEW Φ0.6mm	32TS	number reference		

N2

#### 注意事项 Matters needing attention:

- 1、排线方式为双线分绕,排线要均匀,美观。 2、PIN脚要光亮
- 1. The cable arrangement method is double-wire winding, and the cable arrangement should be uniform and beautiful. 2. PIN feet should be bright.



1111		SEECI	FICATIO	II F	JN A	IFRUVA			
客户名称 CUSTOMER			日期 DATE		2024/5/29				
	户物料编号 STOMER P/N			客户规格型号 DESCRIPTION		ET24 8MH 0.6 line horizontal			
	司物料编号 IR PART NO	XRET24-8n	nH-H		我司品名 OUR PART NAME		ET24 COMMON MODE FILTER		
		电性	生参数 Ele	ctrica	al pai	rameters			
测试项目 电性范围 TEST PROJECT SPEC			测试条件 TEST FREQ					测试仪器 TEST STRUMENTS	
	电感量L1	>8MH		at 25°	C 1KH	z/0.3V		TH2	2829A
	电感量L2	>8MH		at 25°	C 1KH	z/0.3V		TH2	2829A
额	定电流rated current	2.827A (±5%)	(±5%) 电路板实测Circuit board measurement E1412A					112A	
峰值(瞬间)电流 2.827A-5.8A (±5%)			电路板实测Circuit board measurement					t E1412A	
			测试报告	The t	est re	port			
:	测试项目	测试结果 Test result							
T	est project	Spec	1	2 3			4	5	
	电感量L1	>8MH	OK	О	OK OK			OK	OK
	电感量L2	>8MH	OK	0	K	OK		OK	OK
额	定电流rated current	2.827A (±5%)	OK	O	K	ОК		OK	OK
峰值	直(瞬间)电流	2.827A-5.8A (±5%)	ОК	O	K	ОК		ОК	OK
	医温/湿度: CONDITION:	室温: 25℃(REF) 『EMP:25℃(REF)	相对湿度: R.H.:	,					
NO. 项目 <b>project</b> 技术要求Technical requirement conclusion									
1	外观和尺寸 符合产品规范和公差要求 Meet pi Appearance and size specifications and tolerance requirements.			oduct		ок			
2									
制	表 MADE	审核 CHECKED	批准 APPRO	OVED					
Н	ufangting	RaoPing	ZhongCui	lan					



## 注意事项

#### Matters needing attention

1、本公司产品适用于 AV 设备、OA 设备、家电、信息服务等一般电子设备中。

Our products are designed and promoted for use in general electronic devices such as audio-video equipment, office automation equipment, home appliance and information service.

2、当本公司的产品使用在一般电子设备以外的领域时,对于此所引发的设备失效我司将不承担任何法律责任。

In case of using the product for the purpose other than general electronics devices, we shall not be held liable for any dysfunctions in or damage to the equipment with which the product is used.

3、本承认书只保证我司产品作为一个单体时的质量情况, 当我司产品被安装到贵司产品上时, 请贵司对使用在贵司电路上的产品情况进行了有效评价和确认。

Our specification limits the quality of the component as a single unit. Please ensure the component is thoroughly evaluated in your application circuit.

4、不要对产品施加过大的振动或机械冲击:

Do not apply excessive vibration or mechanical shock to products.

5、为防止断线,请不要使用锋利的物体接触线圈,如镊子;

Do not touch wire with sharp objects such as tweezers to prevent wire breakage.

6、在产品贴装时不要使用过大的压力,避免磁芯断裂。

Do not apply excessive stress to products mounted on boards to prevent core breakage.

7、为保证端子电极的焊接特性和包装材料处于良好状态,请于本公司发货后6个月内使用本产品。同时,由于端子电极的焊接特性会随时间发生变化,如果贮存时间超过6个月,请首先确认其焊接特性后再安装使用。

To maintain the solderability of terminal electrodes and to keep the packing material in good condition, product should be used within 6 months from the time of delivery. And the solderability of products electrodes may decrease as time passes, so in case of storage over 6 months, solderability shall be checked before actual usage.

8、存放货物的仓库应满足以下条件 Store products in a warehouse in compliance with the following condition:

条件 Conditions	元件含包装物 Packing status	元件自身 Component itself
温度 Temperature	-25~+40°C	-25~+85 °C
湿度 Humidity	30~70%RH	30~70%RH

9、不要使产品遭受温度和湿度的快速变化。

Do not subject products to rapid changes in temperature and humidity.

10、不要将产品存放在化学环境中,如硫酸气体或碱性气体中,否则会降低电极端子的焊接特性和使电感器腐蚀。

Do not store the products in chemical atmosphere such as one containing sulfurous acid gas or alkaline gas, that will causes poor solderability and corrosion of inductors.

11、为了避免受潮气、灰尘等物质的影响,产品应保管于货架上。

Store products on pallets to protect from humidity, dust, etc

12、产品应避免热冲击、振动以及直接光照等等。

Avoid heat shock, vibration, direct sunlight, etc.