

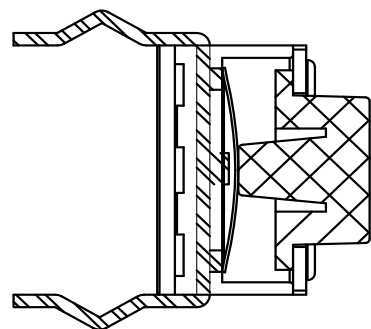
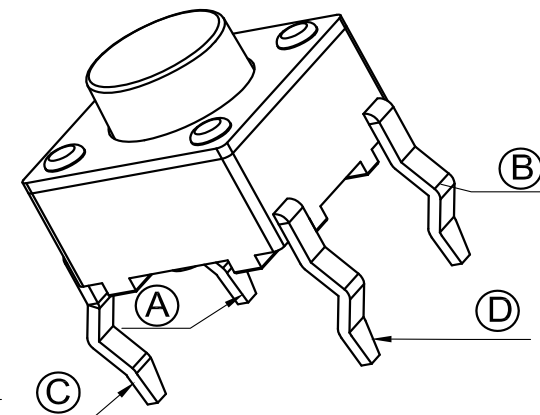


电路简图  
SCHEMATIC

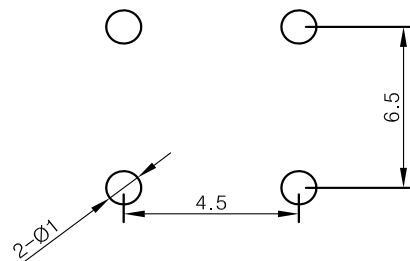

# 印制线路板

*Recommended P.C.B layout*

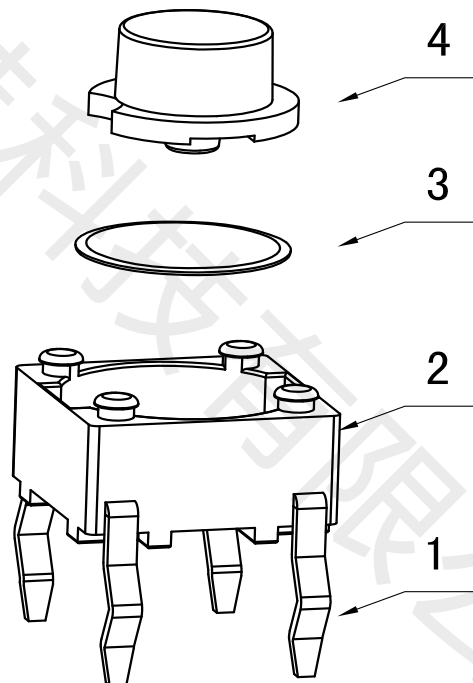

1. Rating:DC12V 50mA
- 2.Travel:0.25 ±0.1mm.
3. Opersting Force: 160 ± 50gf
4. Contact Resistance:100mΩMax.
5. Life:100,000Cycles Min.

| D    | H(高度) |
|------|-------|
| ø3.5 | 4.3   |
| ø3.5 | 5.0   |
| ø3.3 | 6.0   |
| ø3.3 | 7.0   |
| ø3.3 | 8.0   |
| ø3.2 | 8.5   |
| ø3.0 | 13.0  |

|           |                    |                    |              |                      |
|-----------|--------------------|--------------------|--------------|----------------------|
| 6         | _____              | _____              | _____        | _____                |
| 5         | flat cover plate   | iron sheet         | silver       | coppertin<br>plating |
| 4         | skullcap           | PA66               | black        | _____                |
| 3         | shrapnel           | stainless<br>steel | _____        | import<br>materials  |
| 2         | pedestal           | PA66(45%)          | black        | _____                |
| 1         | inserts            | brass              | silver       | platewith silver     |
| 序号<br>NO. | 名 称<br>DESCRIPTION | 材 料<br>MATERIAL    | 颜 色<br>COLOR | 备 注<br>REMARK        |



深圳市首韩科技有限公司

CUSTOMER  
COPY

6\*6 插脚圆轻触开关

|    |          |
|----|----------|
| 型号 | TYPE NO. |
|----|----------|

|                        |
|------------------------|
| TS6685CJ 160gf BXG 022 |
|------------------------|

料 号  
PART NO.(O

D)

|             |  |
|-------------|--|
| 圖 号         |  |
| DRAWING NO. |  |

|  |    |
|--|----|
|  | A  |
|  | 状态 |

|           |  |
|-----------|--|
| DRAWING N |  |
| SCALE     |  |

|     |  |
|-----|--|
| 0.  |  |
| 5.1 |  |

|  | UNIT |
|--|------|
|--|------|

|  |    |
|--|----|
|  | mm |
|--|----|

|  |    |
|--|----|
|  | A4 |
|--|----|



|                         |           |            |                    |  |               |               |                                             |
|-------------------------|-----------|------------|--------------------|--|---------------|---------------|---------------------------------------------|
|                         |           |            |                    |  |               | Angle         | ± 2°                                        |
|                         |           |            |                    |  |               | 30 ~          | ± 0.5                                       |
|                         |           |            |                    |  |               | 10~30         | ± 0.3                                       |
|                         | PO        | 07/11/08   |                    |  |               | ~10           | ± 0.15                                      |
| 工程变更通知单<br>ECN(DCN) NO. | 版次<br>REV | 日期<br>DATE | 说 明<br>DESCRIPTION |  | 改 变<br>CHANGE | 承 认<br>APPRO. | GENERAL TOLERANCE<br>UNLESS OTHERWISE NOTED |

|        |     |     |
|--------|-----|-----|
| DRAW   | 制 图 | 李春风 |
| DESIGN | 设 计 |     |
| CHECK  | 校 核 | 钟华华 |
| APPRO. | 承 认 | 罗孝金 |

|             |     |      |    |    |                                                                                       |
|-------------|-----|------|----|----|---------------------------------------------------------------------------------------|
| DRAWING NO. |     |      |    |    |                                                                                       |
| SCALE       | 5:1 | UNIT | mm | A4 |  |



深圳市首韩科技有限公司

SHENZHEN SHOUHAN TECHNOLOGY CO., LTD

Tel: 0755-27597601 Fax: 0755-27597491

# 承 认 书

## SPECIFICATION FOR APPROVAL

产品编码  
Material code:

产品名称 Project:

轻触开关

规格型号 Part No:

TS6685CJ 160gf BXG 022

贵公司承认印 Approval signatures

| 料 号/Part No. | 签 章/Signatures |
|--------------|----------------|
|              |                |

日期 Date:

|             |     |  |
|-------------|-----|--|
| 拟制/Drawn    | 李春风 |  |
| 审核/Check    | 钟华华 |  |
| 批准/Approved | 罗孝金 |  |

## 产 品 规 格 书

### PRODUCT SPECIFICATION

|                               |                                    |                                                                                                                                                                     |                                                                                    |
|-------------------------------|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| SIRLES                        |                                    | 系列:TACT SWITCHES(轻触开关)                                                                                                                                              |                                                                                    |
| MODEL                         |                                    | 型号: TS6685CJ 160gf BXG 022                                                                                                                                          |                                                                                    |
| 1.RATING                      |                                    | 额定值:50mA 12VDC                                                                                                                                                      |                                                                                    |
| 2.CONSTRUTION DIMENSION 结构尺寸  |                                    | Apply to the appended drawing符合附加图纸                                                                                                                                 |                                                                                    |
| 3.APPEARANCE 外观               |                                    | Have no remarkable damage,crack and rust etc无<br>明显损伤,裂纹,锈迹等.                                                                                                       |                                                                                    |
| 4.CONTACTLOOP 接触回路            |                                    | Monople loop:单通单极回路                                                                                                                                                 |                                                                                    |
| ITEM 专案                       |                                    | TEST CONDITION 测试条件                                                                                                                                                 | SPECIFICATION 规格                                                                   |
| 5.CAPABILITY OF ELECTRIC 电气性能 |                                    |                                                                                                                                                                     |                                                                                    |
| 5A                            | INSULATION RESISTANCE<br>绝缘电阻      | Measurements shall be made following Application of DC500V potential across terminals and across terminals and fuame for 1minute在端子之间和端子与壳之间加 DC500V 条件下,持续 1 分钟测量. | 100M $\Omega$ min<br>100 兆欧以上.                                                     |
| 5B                            | WITHSTAND VILTAGE<br>耐电压           | AC250V、50HZ、1 min (imin(interrupting current $\leq$ 500uA). AC250V、50HZ、1 分钟(漏电流 500uA)                                                                             | There shall be no briakdown 无击穿现象出现。                                               |
| 5C                            | CONTACT CIRCUIT<br>接触电路            | Addition 1.5-2 time force on the top of the keystrok and press the switch,DC50V100mA在按键顶端上等于作用力 1.5-2 倍的力按动开关,DC50V,10Ma.                                           | 100m $\Omega$ Max<br>(100m $\Omega$ 以下) .                                          |
| 5D                            | SWITCH CONNECTION<br>FLASH 开关接触点抖动 | Addition DC5V on the two side of switch,at a speed of 3-5time a sec.to press the switch在开关的两端加 DC5V 的电压,以 3-5 次/秒的速度按动开关.                                           | The flash time between open not more than 10ms.<br>开关在接通和断开时的接点抖动时间不大于 10 ms.      |
| 6.MECHANICAL EFFICIENCY 机械性能  |                                    |                                                                                                                                                                     |                                                                                    |
| 6A                            | CONTACT STRENGTH<br>按键强度           | The contact shall be capable of a rorce of 5N for 5 seconds in any directions沿开关动作方向可承受静能压力 5N, 保持 5 秒钟.                                                            | Switch electric andmechanical efficiency does not break 无损开关电气或者机械性能               |
| 6B                            | CONTACT JOURNEY                    |                                                                                                                                                                     | 按键行程:0.25 $\pm$ 0.1mm                                                              |
| 6C                            | DRIVE FORCE<br>驱动力                 | Being measure at across spring piece and across keystoke forergometer用测力计在按键与弹片之间测量.                                                                                | Contact switch'sd drive dirive fouce was160 $\pm$ 50gf.<br>按键的开关驱动力为160 $\pm$ 50gf |



## 产 品 规 格 书 PRODUCT SPECIFICATION

- 2 -

|                                             |                                                                                                                                                                                                                                   |                                                                                                                                                                               |                                                                                                                                              |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| 6D                                          | CONNECTION STRENGTH<br>接线端强度                                                                                                                                                                                                      | A force of 1N being applying in any directions of the switch connection partt.在接线端的作用方向施加 1N 的力.                                                                              | Switch mechanical efficiency does not break.无损开关机械性能.                                                                                        |
| 6E                                          | MECHANICAL LIFE<br>机械寿命                                                                                                                                                                                                           | Operatin at a rate of 30-50 cycles a minute. 以 30-50 次/分的驱动速度操作.                                                                                                              | Life:100000cycles<br>寿命:100000 次                                                                                                             |
| 7.ENVIRONME NT---RESISTANT EFFICIENCY 耐环境性能 |                                                                                                                                                                                                                                   |                                                                                                                                                                               |                                                                                                                                              |
| 7A                                          | CHANGE OF TEMPERATURE 温度变化                                                                                                                                                                                                        | The first temperature shall be 65℃ ,2h and changed to-30℃ ,2h,5c ycles of above test . 先 65℃ ,2h,然后 -30℃ ,2h, 如此重复 3 次.                                                       | 1. The appearance should not break. 外观应无损伤.<br>2. Contact resistance $\leq 100 \text{ M } \Omega$<br>接触电阻 $\leq 100 \text{ M } \Omega$       |
| 7B                                          | HUMIDITY RESISTANT 耐湿热                                                                                                                                                                                                            | 40 $\pm$ 2℃ in temperature and 95%RH ,Ruring thetest time without load; After testing the temperature should be 48h. 经 40 $\pm$ 2℃ ,相对湿度 95% , 试验期间,开关不动作,不带电负荷,试验后恢复到常温 48h. | 3. Insulation resistance $\geq 100 \text{ M } \Omega$ .<br>绝缘电阻 $\geq 100 \text{ M } \Omega$                                                 |
| 8.IOINTING EFFICIENCY 焊接性能                  |                                                                                                                                                                                                                                   |                                                                                                                                                                               |                                                                                                                                              |
| 8A                                          | SOLDERABILITY<br>可焊性                                                                                                                                                                                                              | Temperature260 $\pm$ 5℃ ;Duration;3 $\pm$ 0.5S:温度在 260 $\pm$ 5℃ ,持续 3 $\pm$ 0.5S.                                                                                             | Solderability part should above 90%<br>可焊部分被焊料覆盖面应在 90% 以上.                                                                                  |
| 8B                                          | SOLDER—RESISTANT<br>耐焊剂性                                                                                                                                                                                                          | Warm-up temperature:100℃,40S,焊锡温度 260 $\pm$ 5℃ ,浸焊时间 3 $\pm$ 0.5S.                                                                                                            | Froth height of assist solder should under board and switch electric and mechanical efficien- cy does not break.助焊剂发泡不应超过印制板,无损伤开关电气或机械动作性能. |
| 8C                                          | JOINTING—RESISTANT<br>耐焊接热                                                                                                                                                                                                        | Jointing temperature: 260 $\pm$ 5℃ ,Duration of immersion: 5 $\pm$ 1S.焊锡温度 260 $\pm$ 5℃ ,浸焊时间5 $\pm$ 1S                                                                       | efficiency does not break 无损伤开关电气或机械动作性能.                                                                                                    |
| 8D                                          | NORMAL JOLNTING TIMES<br>正常焊接次数                                                                                                                                                                                                   |                                                                                                                                                                               | $\leq 2$ times 小于 2 次                                                                                                                        |
| 9.NOTES                                     |                                                                                                                                                                                                                                   |                                                                                                                                                                               |                                                                                                                                              |
| 9A                                          | The whole boxes of switch should keep in the temperature -30--80℃and less than 80%RH withort acidic,alkalescence,caustic gas in the environment of the storage.<br>整箱包装的开关,应在温度为-30--80℃,相对湿度不大于 80%,周围的空气中没有酸性、碱性或其他腐蚀性气体的库房内保管。 |                                                                                                                                                                               |                                                                                                                                              |
| 9B                                          | Operating Temperature Range:-16to 60℃<br>操作温度的范围: -16 to 60℃                                                                                                                                                                      |                                                                                                                                                                               |                                                                                                                                              |
| 9C                                          | Switch should install in a correct method.<br>开关应按正确的安装方法进行正确安装使用。                                                                                                                                                                |                                                                                                                                                                               |                                                                                                                                              |