

General Description


The SP5700D1P piezoresistive transducers are designed for a wide range of applications, but particularly those employing a microcontroller or microprocessor with A/D inputs. This transducer uses advanced micromachining techniques to Provide an accurate, high level analog output signal that is Proportional to the applied pressure.

Features

- ★ 2.5% Maximum Error over 0 ° to 85°C
- ★ Ideally Suited for Microprocessor or Microcontroller-Based Systems
- ★ Durable Epoxy Unibody Element
- ★ Available in Differential and Gauge Configurations

| ORDERING INFORMATION | | | | | | |
|----------------------|------------|--------|------|---------------|--------------|----------|
| Device Name | # of Ports | | | Pressure Type | | |
| | None | Single | Dual | Gauge | Differential | Absolute |
| Unibody Package | | | | | | |
| SP5700D1P | | | • | | • | |

Unibody packages

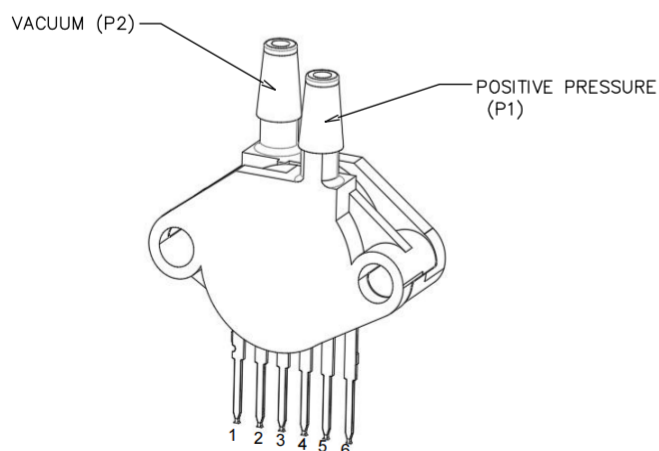

The two sides of the pressure sensor are designated as the Pressure (P1) side and the Vacuum (P2) side.

The Pressure (P1) side is the side containing silicone gel which protects the die from harsh media.

The SP5700D1P pressure sensor is designed to operate with positive differential pressure applied, $P1 > P2$.

Operating Characteristics

Operating Characteristics (VS = 5.0 Vdc, TA = 25°C unless otherwise noted, P1 > P2. Decoupling circuit shown in Figure 2 required to meet specification.)

| Characteristics | Symbol | Min | Typ | Max | Unit |
|---|------------------|-------|------|-------|-------------------|
| Pressure Range | P _{OP} | 0 | — | 700 | kPa |
| Supply Voltage ⁽¹⁾ | V _s | 4.75 | 5.0 | 5.25 | Vdc |
| Supply Current | I _o | — | 2.5 | 10 | mAdc |
| Zero Pressure Offset ⁽²⁾ (0°C to 85°C) | V _{off} | 0.088 | 0.20 | 0.313 | Vdc |
| Full Scale Output ⁽³⁾ (0°C to 85°C) | V _{FSO} | 4.587 | 4.70 | 4.813 | Vdc |
| Full Scale Span ⁽⁴⁾ (0°C to 85°C) | V _{FSS} | — | 4.5 | — | Vdc |
| Accuracy ⁽⁵⁾ (0°C to 85°C) | — | — | — | ±2.5 | %V _{FSS} |
| Sensitivity | V/P | — | 6.4 | — | mV/kPa |
| Response Time ⁽⁶⁾ | t _R | — | 2.0 | — | ms |

- Device is ratiometric within this specified excitation range.
- Offset (V_{off}) is defined as the output voltage at the minimum rated pressure.
- Full Scale Output (V_{FSO}) is defined as the output voltage at the maximum or full rated pressure.
- Full Scale Span (V_{FSS}) is defined as the algebraic difference between the output voltage at full rated pressure and the output voltage at the minimum rated pressure.
- Accuracy (error budget) consists of the following:
 - Linearity: Output deviation from a straight line relationship with pressure over the specified pressure range.
 - Temperature Hysteresis: Output deviation at any temperature within the operating temperature range, after the temperature is cycled to and from the minimum or maximum operating temperature points, with zero differential pressure applied.
 - Pressure Hysteresis: Output deviation at any pressure within the specified range, when this pressure is cycled to and from the minimum or maximum rated pressure, at 25°C.
 - TcSpan: Output deviation over the temperature range of 0° to 85°C, relative to 25°C.
 - TcOffset: Output deviation with minimum rated pressure applied, over the temperature range of 0° to 85°C, relative to 25°C.
 - Variation from Nominal: The variation from nominal values, for Offset or Full Scale Span, as a percent of V_{FSS}, at 25°C.
- Response Time is defined as the time for the incremental change in the output to go from 10% to 90% of its final value when subjected to a specified step change in pressure.

Note: Plugged or unplugged with power may cause permanent damage.

Maximum Ratings

Maximum Ratings⁽¹⁾

| Rating | Symbol | Value | Unit |
|---|------------------|-------------|------|
| Maximum Pressure ($P_2 \leq 1\text{atm}$) | P_{\max} | 2800 | kPa |
| Storage Temperature | T_{stg} | -40 to +125 | °C |
| Operating Temperature | T_A | -40 to +125 | °C |

1. Exposure beyond the specified limits may cause permanent damage or degradation to the device.
2. This sensor is designed for applications where P_1 is always greater than, or equal to P_2 . P_2 maximum is 500 kPa.

Figure 1 shows a block diagram of the internal circuitry.

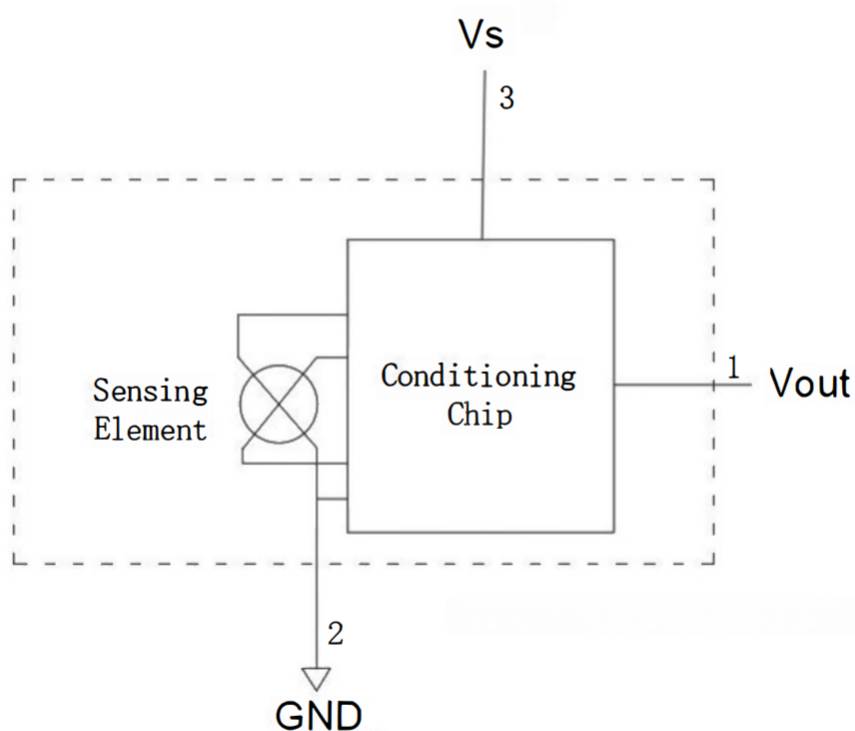


Figure 1. Pressure Sensor Schematic

TEMPERATU RECOMPENSATION AND CALIBRATION

A silicone gel isolates the die surface and wire bonds from the environment, while allowing the pressure signal to be transmitted to the sensor diaphragm.

The SP5700D1P pressure sensor operating characteristics, and internal reliability and qualification tests are based on use of dry air as the pressure media. Media, other than dry air, may have adverse effects on sensor performance and long-term reliability. Contact the factory for information regarding media compatibility in your application.

Figure 2 shows the recommended decoupling circuit for interfacing the integrated sensor to the A/D input of a microprocessor or microcontroller. Proper decoupling of the power supply is recommended. Figure 3 shows the sensor output signal relative to pressure input. Typical, minimum, and maximum output curves are shown for operation over a temperature range of 0° to 85°C using the decoupling circuit shown in Figure 2.

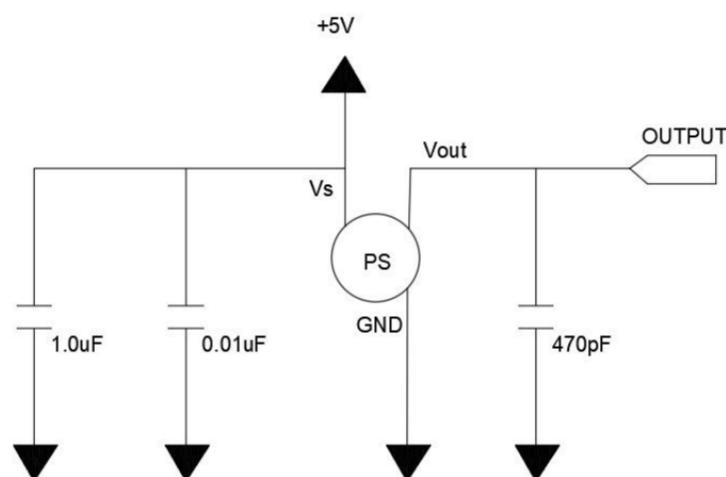


Figure 2. Recommended Power Supply Decoupling and Output Filtering


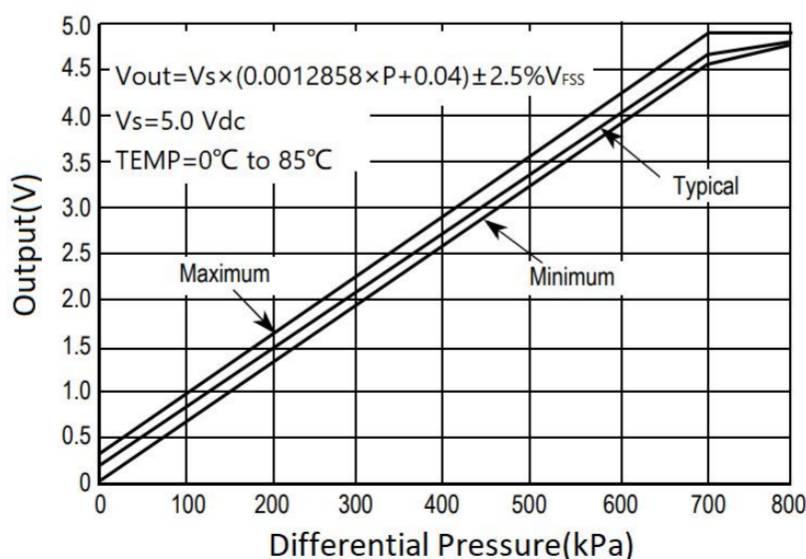


Figure 3. Output vs. Pressure Differential

PACKAGE DIMENSIONS

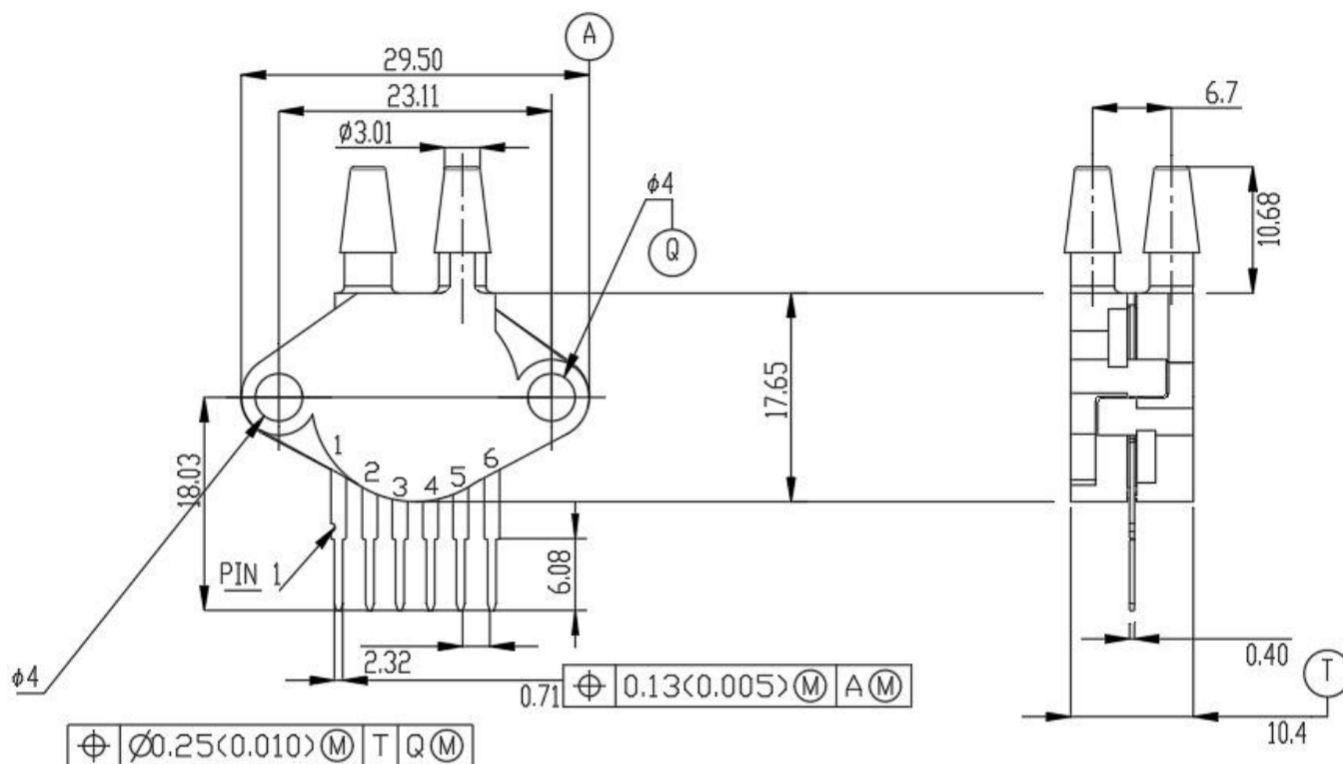

Package Quantity

200PCS/Tray