

承認書

SPECIFICATION FOR APPROVAL

客户名稱
CUSTOMER

客户料号
CUS. P/N

尺寸
DIMENSION

CRH-9.5x10x5

編號
SERIAL NO.

NO. CF1025657105

日期
DATE

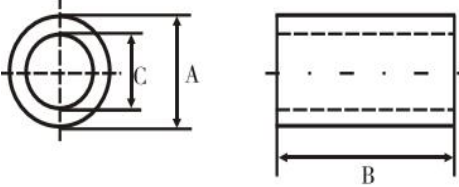
2024年5月6日

出圖 DRAWING		
發行 ISSUE	復核 CHECKED	核準 APPROVAL
趙 利勤	李 新义	王 传军
DATE: 2024/5/6		

承認 CUSTOMER APPROVAL

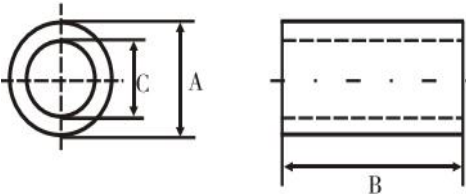

承 認 書

SPECIFICATION FOR APPROVAL

規 格 ITEM	CRH-9.5x10x5		編 號 SERIAL NO.		NO. CF1025657105	
1. 形狀尺寸（單位mm）； SHAPE & DIMENSION(unit/mm); 			A	9.50 ± 0.5	mm	
			B	10.00 ± 0.5	mm	
			C	5.00 ± 0.5	mm	
			D			
			E			
			F			
			G			
2. 電器性能檢測項目 ELECTTRONICAL REQUIREMENTS;						
☐ L		TEST FREQ		測試儀器 TESTING INSTRUMENTS		
☐ Q		TEST FREQ	KHZ MHZ	1. Q-METER: ☐ HP-4342A ☐ MQ-172		
☒ Z	Z1=40 Ω MIN KHZ 25MHZ	Z3=	KHZ MHZ	2. LCR-METER: ☐ TH2826		
	Z2=90 Ω MIN KHZ 100MHZ	Z4=	KHZ MHZ	3. IMPEDANCE ANALYZER: ☒ HP-4191A ☐ Agilent 16092A ☐ TH2826		
溫 度 TEMP	25±5℃	濕 度 HUMIDITY	60±8%	4. L-METER: ☐ TH-2775B		
繞 線: WINDING	Z: Φ 0.5*100L(mm)*0.5TS			5. DIGITAL MINI-OHM METER: VP2941A		
3. 外 观 THE LIMIT OF BREAKAGE:						
項 目 Item			標準值 Standard Value			
一處缺陷的面积 Area of a breakage			≤1mm ²			
总缺陷面积 ALL area of the breakage			≤2mm ²			
缺陷深度 The depth of the breakge			≤0.4mm			
毛刺长度 The length of burr			≤0.2mm			
4. 包 裝 PACKAGING:						
內包裝采用泡塑盒，外包裝采用紙箱，每箱產品外面都蓋上标签（包括品名、數量、批號、檢驗員）。 Inner packing gdopts foam plastics box,outer packing adopts carton and each carton should have a qualified label outside(include the variey,quantity,batch number and inspector).						

檢 測 數 據

INSPECTION DATA

規 格 ITEM		CRH-9.5x10x5				編 號 SERIAL NO.		NO. CF1025657105					
1. 形壯尺寸(单位/毫米): SHAPE & DIMENSION(unit/mm): = 						☐ L							
						☐ Q				KHZ MHZ			
						☒ Z		Z1=40 Ω MIN KHZ 25MHZ		Z1= KHZ MHZ			
								Z2=90 Ω MIN KHZ 100MHZ		Z4= KHZ MHZ			
						溫 度 TEMP		25±5℃		濕 度 HUMIDITY		60±8%	
						绕 线: WINDING		Z: Φ 0.5*100L(mm)*0.5TS					
項 目 ITEM	电 气 性 能 ELECTRONIC CHARACTERISTICS						尺 寸 DIMENSION(unit:mm)						
	Q	L(μ H)	Z1(Ω)	Z2(Ω)	Z3(Ω)	Z4(Ω)	A	B	C	D	E	F	
			40	90			9.5	10	5				
+			/	/			0.5	0.5	0.5				
—			0	0			0.5	0.5	0.5				
1			61.2	140.4			9.49	10.03	5.01				
2			60.6	149.4			9.46	10.01	5.02				
3			61.1	147.6			9.52	10.04	5.00				
4			59.8	143.1			9.48	10.13	5.03				
5			61.3	145.8			9.46	10.00	4.99				
6			59.9	137.1			9.54	10.14	4.98				
7			60.6	145.7			9.52	10.02	5.03				
8			62.4	145.5			9.54	10.05	5.03				
9			62.0	147.4			9.52	10.07	4.99				
10			61.2	151.1			9.51	10.11	5.00				
X			61.0	145.3			9.50	10.06	5.01				
Y/N			Y	Y			Y	Y	Y				
2. 測試儀器 TESTING INSTRUMENTS HP4191A 						檢 測 INSPECTION		復 核 CHECK		确 認 APPROVAL			
						赵 利勤		李 新义		王 传军			

IMPEDANCE V.S.FREQUENCY (Z-Y)

The graph shows the impedance of a series RLC circuit as a function of frequency. The x-axis represents Frequency in MHz, ranging from 1 to 1000 on a logarithmic scale. The y-axis represents Impedance in Ω , ranging from 1 to 1000 on a logarithmic scale. The curve starts at approximately 4.5 Ω at 1 MHz, rises to a peak of about 800 Ω at 500 MHz, and then drops to approximately 50 Ω at 1000 MHz.

© CF2024 版

第 4 页，共 4 页