

承認書

SPECIFICATION FOR APPROVAL

客户名稱
CUSTOMER

客户料号
CUS. P/N

尺寸
DIMENSION

CRH-18.4x28.5x11

編號
SERIAL NO.

NO. CF1025657312

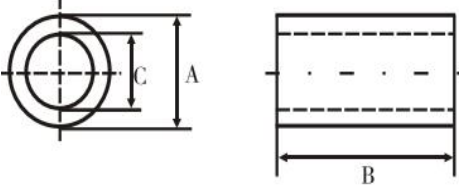
日期
DATE

2024年5月6日

出圖 DRAWING		
發行 ISSUE	復核 CHECKED	核準 APPROVAL
趙 利勤	李 新义	王 传军
DATE: 2024/5/6		

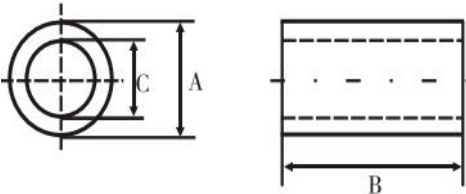

承認 CUSTOMER APPROVAL

承 認 書
SPECIFICATION FOR APPROVAL

規 格 ITEM	CRH-18.4x28.5x11		編 號 SERIAL NO.		NO. CF1025657312	
1. 形狀尺寸（单位mm）； SHAPE & DIMENSION(unit/mm); 			A	18.40 ± 0.5	mm	
			B	28.50 ± 0.8	mm	
			C	11.00 ± 0.5	mm	
			D			
			E			
			F			
			G			
2. 電器性能檢測項目 ELECTTRONICAL REQUIREMENTS;						
☐ L		TEST FREQ		測試儀器 TESTING INSTRUMENTS		
☐ Q		TEST FREQ	KHZ MHZ	1. Q-METER: ☐ HP-4342A ☐ MQ-172		
☒ Z	Z1=85 Ω MIN KHZ 25MHZ	Z3=	KHZ MHZ	2. LCR-METER: ☐ TH2826		
	Z2=130 Ω MIN KHZ 100MHZ	Z4=	KHZ MHZ	3. IMPEDANCE ANALYZER: ☐ HP-4191A ☒ Agilent 16092A ☒ HP4396B		
溫 度 TEMP	25±5℃	濕 度 HUMIDITY	60±8%	4. L-METER: ☐ TH-2775B		
绕 线: WINDING	Z: Φ 0.5*100L(mm)*0.5TS			5. DIGITAL MINI-OHM METER: VP2941A		
3. 外 观 THE LIMIT OF BREAKAGE:						
項 目 Item			標準值 Standard Value			
一处缺陷的面积 Area of a breakage			≤1mm ²			
总缺陷面积 ALL area of the breakage			≤2mm ²			
缺陷深度 The depth of the breakge			≤0.4mm			
毛刺长度 The length of burr			≤0.2mm			
4. 包 裝 PACKAGING:						
內包裝采用泡塑盒，外包裝采用紙箱，每箱產品外面都蓋上标签（包括品名、數量、批號、檢驗員）。 Inner packing gdopts foam plastics box,outer packing adopts carton and each carton should have a qualified label outside(include the variey,quantity,batch number and inspector).						

檢 測 數 據

INSPECTION DATA

規 格 ITEM		CRH-18.4x28.5x11				編 號 SERIAL NO.		NO. CF1025657312					
1. 形壯尺寸(单位/毫米): SHAPE & DIMENSION(unit:mm): = 						☐ L							
						☐ Q				KHZ MHZ			
						☒ Z		Z1=85 Ω MIN KHZ 25MHZ		Z1= KHZ MHZ			
								Z2=130 Ω MIN KHZ 100MHZ		Z4= KHZ MHZ			
						溫 度 TEMP		25±5℃		濕 度 HUMIDITY		60±8%	
						绕 线: WINDING		Z: Φ 0.5*100L(mm)*0.5TS					
項 目 ITEM	电 气 性 能 ELECTRONIC CHARACTERISTICS						尺 寸 DIMENSION(unit:mm)						
	Q	L(μ H)	Z1(Ω)	Z2(Ω)	Z3(Ω)	Z4(Ω)	A	B	C	D	E	F	
			85	130			18.4	28.5	11				
+			/	/			0.5	0.8	0.5				
—			0	0			0.5	0.8	0.5				
1			114.8	150.8			18.38	28.59	11.02				
2			113.6	147.7			18.33	28.53	11.03				
3			114.5	147.4			18.44	28.61	11.01				
4			112.1	148.1			18.36	28.59	11.06				
5			114.9	147.2			18.33	28.50	10.99				
6			112.3	146.0			18.47	28.53	10.97				
7			113.7	145.5			18.44	28.56	11.06				
8			115.6	146.9			18.47	28.64	11.06				
9			116.2	148.4			18.44	28.57	10.99				
10			113.1	148.9			18.42	28.36	11.00				
X			114.1	147.7			18.41	28.55	11.02				
Y/N			Y	Y			Y	Y	Y				
2. 測試儀器 TESTING INSTRUMENTS HP4191A 						檢 測 INSPECTION		復 核 CHECK		确 認 APPROVAL			
						赵 利勤		李 新义		王 传军			

IMPEDANCE V.S.FREQUENCY (Z-Y)

The graph shows the impedance of a series RLC circuit as a function of frequency. The x-axis represents Frequency in MHz, ranging from 1 to 1000 on a logarithmic scale. The y-axis represents Impedance in Ω , ranging from 1 to 1000 on a logarithmic scale. The curve starts at approximately 9 Ω at 1 MHz, rises to a peak of about 500 Ω at 400 MHz, and then decreases to about 150 Ω at 1000 MHz.

© CF2024 版

第 4 页，共 4 页