

承認書

SPECIFICATION FOR APPROVAL

客户名稱
CUSTOMER

客户料号
CUS. P/N

尺寸
DIMENSION

CSNF-50B

編號
SERIAL NO.

NO. CF1025411325

日期
DATE

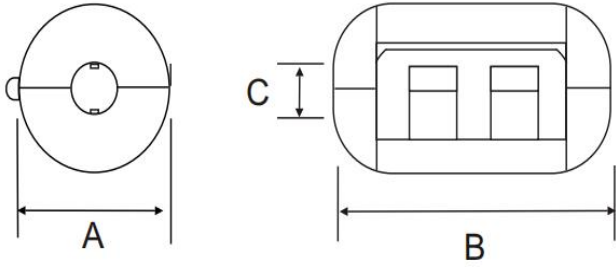
2024年5月8日

出圖 DRAWING		
發行 ISSUE	復核 CHECKED	核準 APPROVAL
趙 利勤	李 新义	王 传军
DATE: 2024/5/8		

承認 CUSTOMER APPROVAL




承認書

SPECIFICATION FOR APPROVAL

規格 ITEM	CSNF-50B		編號 SERIAL NO.	NO. CF1025411325	
1. 形狀尺寸 (單位mm) ; SHAPE & DIMENSION(unit/mm); 			A	16.50 ± 0.8	mm
			B	29.50 ± 0.8	mm
			C	5.00 ± 0.6	mm
			D		
			E		
			F		
			G		
			2. 電器性能檢測項目 ELECTTRONICAL REQUIREMENTS;		
☐ L		TEST FREQ		測試儀器 TESTING INSTRUMENTS	
☐ Q		TEST FREQ	KHZ MHZ	1. Q-METER: ☐ HP-4342A ☐ MQ-172	
☒ Z	Z1=40 Ω MIN 25MHZ	KHZ	Z3=	KHZ MHZ	2. LCR-METER: ☐ TH2826
	Z2=120 Ω MIN 100MHZ	KHZ	Z4=	KHZ MHZ	3. IMPEDANCE ANALYZER: ☒ HP-4191A ☐ Agilent 16092A ☐ TH2826
溫度 TEMP	25±5℃	濕 度 HUMIDITY	60±8%		4. L-METER: ☐ TH-2775B
繞 線: WINDING		Z: Φ 0.5*100L(mm)*0.5TS		5. DIGITAL MINI-OHM METER: VP2941A	
3. 外 觀 THE LIMIT OF BREAKAGE:					
項 目 Item			標準值 Standard Value		
一處缺陷的面积 Area of a breakage			≤1mm ²		
总缺陷面积 ALL area of the breakage			≤2mm ²		
缺陷深度 The depth of the breakge			≤0.4mm		
毛刺长度 The length of burr			≤0.2mm		
4. 包 裝 PACKAGING:					
內包裝采用泡塑盒，外包裝采用紙箱，每箱產品外面都蓋上标签（包括品名、數量、批號、檢驗員）。 Inner packing gdopts foam plastics box,outer packing adopts carton and each carton should have a qualified label outside(include the variey,quantity,batch number and inspector).					

檢 測 數 據

INSPECTION DATA

規 格 ITEM		CSNF-50B					編 號 SERIAL NO.		NO. CF1025411325					
1. 形狀尺寸(单位/毫米): SHAPE & DIMENSION(unit/mm):  							☐ L							
							☐ Q				KHZ MHZ			
							☒ Z		Z1=40 Ω MIN KHZ 25MHZ		Z1= KHZ MHZ			
									Z2=120 Ω MIN KHZ 100MHZ		Z4= KHZ MHZ			
							溫 度 TEMP		25±5℃		濕 度 HUMIDITY		60±8%	
							绕 线: WINDING		Z: Φ 0.5*100L(mm)*0.5TS					
項 目 ITEM	电 气 性 能 ELECTRONIC CHARACTERISTICS						尺 寸 DIMENSION(unit:mm)							
	Q	L(μ H)	Z1(Ω)	Z2(Ω)	Z3(Ω)	Z4(Ω)	A	B	C	D	E	F		
			40	120			16.5	29.5	5					
+			/	/			0.8	0.8	0.6					
—			0	0			0.8	0.8	0.6					
1			60.8	148.8			16.48	29.59	5.01					
2			60.2	156.0			16.43	29.53	5.02					
3			60.8	153.6			16.24	29.62	5.00					
4			63.2	151.2			16.29	29.88	5.03					
5			64.4	149.1			16.25	29.50	4.99					
6			62.4	153.2			16.27	29.91	4.98					
7			64.0	149.2			16.53	29.56	5.03					
8			62.0	150.6			16.29	29.65	5.03					
9			61.1	154.7			16.40	29.71	4.99					
10			63.2	148.8			16.52	29.82	5.00					
X			62.2	151.5			16.37	29.68	5.01					
Y/N			Y	Y			Y	Y	Y	Y	Y			
2. 測試儀器 TESTING INSTRUMENTS HP4191A+16092A 							檢 測 INSPECTION		復 核 CHECK		确 認 APPROVAL			
														

IMPEDANCE V.S.FREQUENCY (Z-Y)

The graph shows the impedance of a series RLC circuit as a function of frequency. The x-axis represents Frequency in MHz, ranging from 1 to 1000 on a logarithmic scale. The y-axis represents Impedance in Ω , ranging from 1 to 1000 on a logarithmic scale. The curve starts at approximately 4 Ω at 1 MHz, rises to a peak of about 500 Ω at 400 MHz, and then decreases to about 200 Ω at 1000 MHz.

测试条件; TESTING CONDITION;	檢 測 INSPECTION	復 核 CHECK	確 認 APPROVAL
1. 测试仪器: HP 4191 A+16092 A Testing Equipment:			
2. 测试频率区间: 1MHZ-1000MHZ Testing Frequency Range:			
3. 测试绕组: Φ0.5*100L(mm)*0.5TS Testing Coil Specification:			