



www.lemo.com

## **SUMMARY**

#### # Wires

Low voltage 32



Image is for illustrative purpose only

Series 3B

**Termination type** Female print PCB

IP rating 50

AWG wire size 0.00 - 0.00

Cable Ø 0.00 - 0.00 mm

**Status** active

## **Download**

Request a quote
PCB Eagle Pattern
PCB Altium Pattern
PCB KiCad Pattern

Catalog

## **TECHNICAL DETAILS**

## **Mechanics**

Shell Style/Model EC\*: Fixed receptacle with two nuts and straight contacts for printed circuit (back panel

mounting)

**Keying** 2 keys (alpha=30, plug: male contacts, receptacle: female contacts)

Housing Material

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290]

brass latch sleeve and mid pieces

**Weight** 31.90 g

### **Performance**

Configuration 3B.332 : 32 Low Voltage Insulator L: PEEK (UL 94 / V-0/1.5)

Rated Current 3 Amps

## **Specifications**

Contact Type: Print (straight)

Vtest (contact-shell): 700 V (AC), 990 V (DC) Vtest (contact-contact): 750 V (AC), 1050 V (DC)

#### **Others**

Endurance (Shell): 5000


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Temp (min / max): -55°C / +250°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz] Shock Resistance: 100 g [ 6 ms] Climatical Category: 50/175/21 Shielding (min): 75 dB (10 MHz) Shielding (min): 40 dB (1 GHz) Salt Spray Corrosion: >1000 hr

# **DRAWINGS**

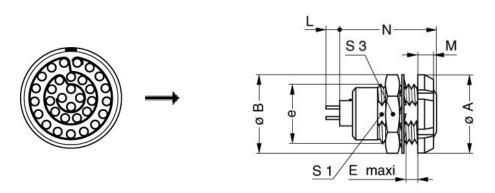



### **Dimensions**

	A	В	Е	Lmax	М	N	<b>S</b> 1	<b>S</b> 3	e
mm.	24	25	9	30.3	4.5	25	16.5	22	M18x1.0
in.	0,94	0,98	0,35	1,19	0,18	0,98	0,65	0,87	

# **RECOMMENDED BY LEMO**

## **Tools**

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.