



# MXC6244AU-B Prototyping Board

## MXC6244AU-B

### GENERAL DESCRIPTION

The MXC6244AU-B provides a convenient and easy way to evaluate and prototype with the MXC6244AU dual axes accelerometer. The accelerometer and passive components are SMT mounted on the board. Each pin of the MXC6244AU SMT device is brought out to standard 0.10 inch on center connections on the sides of the prototyping board. Wires can either be soldered directly to the prototyping board or the DIP pins can be used with widely available breadboard kits.

For complete performance specifications of the MXC6244AU refer to the MXC6244AU datasheet.


### PIN DESCRIPTION

| Pin  | Name  | Description                   |
|------|-------|-------------------------------|
| P1-1 | VDDIO | Supply Voltage for I2C bus    |
| P1-2 | VDD   | Supply Voltage 2.7 to 5.5 V   |
| P1-3 | GND   | Ground                        |
| P2-1 | SDA   | Serial Data Line for I2C Bus  |
| P2-2 | SCL   | Serial Clock Line for I2C Bus |
| P2-3 | INT   | Interrupt output              |




MXC6244AU-B

### SCHEMATIC OF THE MXC6244AU-B

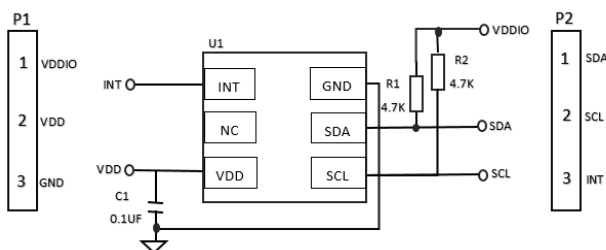

MXC6244AU-B

### PCB CONNECTION DIMENSIONS

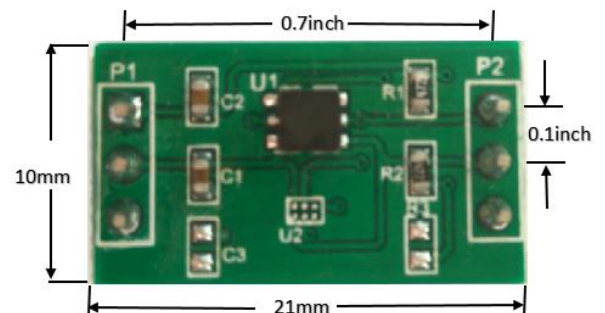

MXC6244AU-B

Information furnished by MEMSIC is believed to be accurate and reliable. However, no responsibility is assumed by MEMSIC for its use, nor for any infringements of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of MEMSIC.

©MEMSIC, Inc.  
One Technology Drive, Suite 325, Andover, MA, 01810, USA  
Tel: +1 978 738 0900 Fax: +1 978 738 0196  
[www.memsic.com](http://www.memsic.com)