

www.lemo.com

# FGW.LM.355.CLCT

# **SUMMARY**

#### # Wires

Low voltage 55



Image is for illustrative purpose only

Series LM

**Termination type** Male crimp

IP rating 68

AWG wire size 24.00 - 20.00 Cable Ø 11.35 - 22.70 mm

Status active

### **Download**

Request a quote

Eplan Catalog

See video assembly instructions

# **TECHNICAL DETAILS**

#### **Mechanics**

**Shell Style/Model** FG\*: Straight plug with arctic grip and mold stop

Keying 5 keys (alpha=95, beta=115, gamma=35, delta=25, plug: male contacts, receptacle: female

contacts)

Housing Material

Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290]

brass latch sleeve and mid pieces

**Weight** 32.72 g

### **Performance**

Configuration LM.355: 55 (0.9 mm) Low Voltage

Insulator L: PEEK
Rated Current 3.5 Amps

# **Specifications**

Contact Type: Crimp Contact Retention: 30 N

Contact Dia.: 0.9 mm (0.035in) Bucket Dia.: 1.1 mm (0.043in)

Min. Conductor: 0.25 mm<sup>2</sup> (AWG 24) Max. Conductor: 0.5 mm<sup>2</sup> (AWG 20)

R (max): 4.8 mOhm

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Test voltage (kV rms) Contact-contact: 1.65 Test voltage (kV rms) Contact-shell: 1.95

### **Others**

Endurance (Shell): 3000 mating cycles Temp (min / max): -55°C / +200°C Humidity (max): 21 days at 95%

Gunfire vibration: 25 Hz - 2000 Hz, 3 axis (Apache helicopter)

Vibration-Sine: 30 g, 3 axes, 12 hr [10 Hz - 2000 Hz]

Vibration-Random: 37.8 g rms - 3 axes, 4 hr amb [50 Hz - 2000 Hz]


Shock Resistance: 300 g [ 3 ms]

Lighting strike EIA 364-75: 10K amps - 6 times Thermal shock: 5 cycles: -65°C to +150°C

EMI Shielding EIA 364-66A: >= 80 dB (1 GHz), >= 70 dB (3 GHz), >= 58 dB (6 GHz), >= 40 dB (10 GHz)

Salt Spray Corrosion: >1000 hr

# **DRAWINGS**

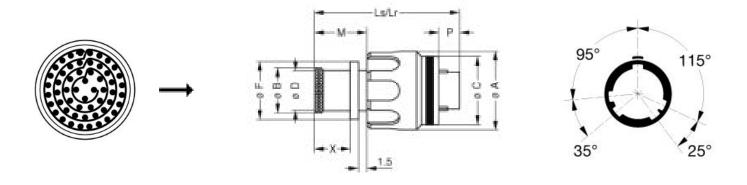

### **Dimensions**

	А	В	С	D	F	Lr	Ls	М	Р	Х
mm.	29.4	23.9	28	22.7	25.8	31.6	31.6	10.6	3.4	7.6
in.	1,16	0,94	1,10	0,89	1,02	1,24	1,24	0,42	0,13	0,30

# **RECOMMENDED BY LEMO**

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

## **Tools**

Crimp Tool: DPC.91.701.V

Crimp settings: AWG/Selector = 20-22-24/6-5-5

Positionner: <u>DCE.91.090.5MVC</u>

Extractor: DCF.93.090.4LT

Replacement contact: FGN.0M.560.ZZC

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.