


OIL TIGHT Large Incandescent Indicators

FOR MOUNTING IN 1" CLEARANCE HOLE

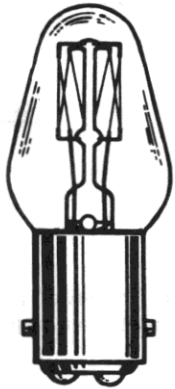

C7
DOUBLE CONTACT
BAYONET BASE

LAMP NO.	VOLTS	WATTS	HOURS
10C7/1DC	120	10	6000
10C7/5DC	120	10	8000
10C7/DC	120	10	6000



104-3527-0211-403
Flat lens

Recognized under the component
program of Underwriters'
Laboratories Inc.



MATERIALS AND FINISHES

- **Mounting Bushing:** Brass, white nickel finish.
Optional, black nickel finish.
- **Lens Holder:** Brass, satin chrome finish, Optional,
polished chrome or black nickel finish.
- **Internal Tooth Lockwasher:** Steel, cadmium plated, iridite finish.
- **Mounting Nut:** Brass, white nickel finish.

How to designate the three digit part number suffix (-XXX)

FINISH	RESISTOR	HARDWARE
1-WHITE NICKEL	0-NONE	3-WATER-TIGHT, OIL TIGHT ON THE FACE OF THE PANEL
2-BLACK NICKEL		
3-POLISHED CHROME		
4-SATIN CHROME		

Note: The part numbers given in this catalog indicate standard indicator lights.
The above table provides the standard and optional designations for Finish and
Resistor where appropriate.

☐ **MOVABLE TERMINALS:** Terminal
part makes direct contact to lamp,
no current is carried by springs.
Wiring is displaced only 1/16" on
insertion of lamp.

☐ **FIXED TERMINALS:** Connecting
wiring may be rigid. No terminal
movement during insertion of lamp.

215 SERIES
104 SERIES

BASE PART NUMBERS

movable screw terminals	fixed screw terminals	fixed soldering terminals
104-3527-02-103	104-3227-02-103	104-3427-02-103

CAP PART NUMBERS

COMPLETE ASSEMBLY PART NUMBERS

CAP PART NUMBERS	COMPLETE ASSEMBLY PART NUMBERS		
FLAT † 215-0231-403 unfrosted (with disc) 104-0211-403 back frosted (without disc)	† 215-3527-0231-403 104-3527-0211-403	† 215-3227-0231-403 104-3227-0211-403	† 215-3427-0231-403 104-3427-0211-403

☐ For movable soldering terminals, change the group of
digits of the part number that reads -3527- to -3627-.
Example: 215-3627-0231-403.

† See "Legend Film Discs" on page 1E.

Part numbers listed in this catalog designate products with RED lens.
For ordering lens colors other than red, consult chart on page 1E.

Order complete with lamp to be assured of receiving the
indicator light and correct lamp together for immediate use.