
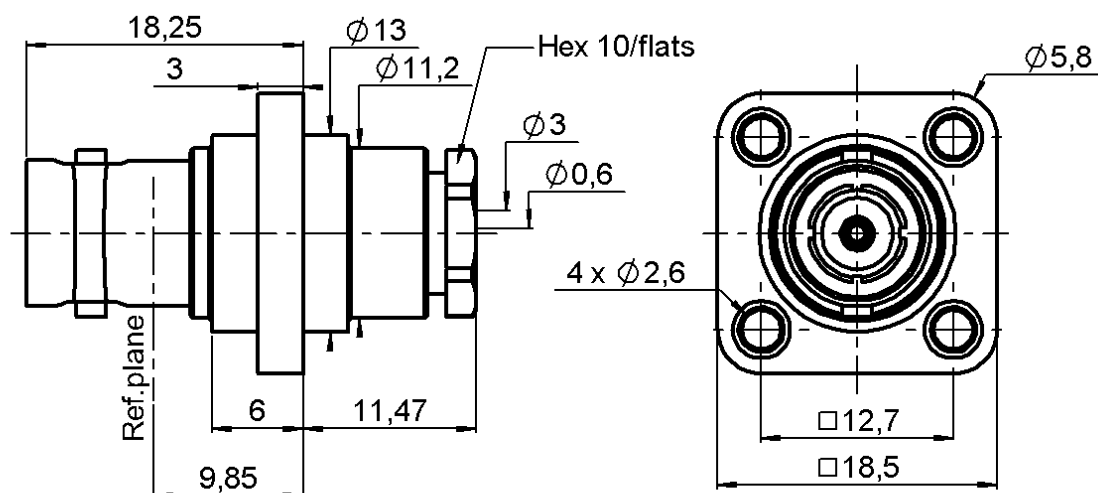



STRAIGHT INSULATED SQUARE FLANGE JACK
CLAMP TYPE - CABLE 2.6/50+75
R141.277.000


Series : BNC


PANEL CUT OUT


	mm	
	Maxi	mini
A	13.3	13.2
B	2.7	2.6
C	12.75	12.65



Scale : 1/1

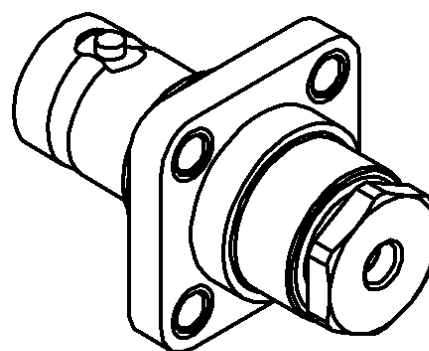

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (μm)
BODY	BRASS	NICKEL 2
CENTER CONTACT	BERYLLIUM COPPER	GOLD 0.5 OVER NICKEL 2
OUTER CONTACT	-	-
INSULATOR	PTFE	-
GASKET	SILICONE RUBBER	-
OTHERS PARTS	BRASS	NICKEL 2
-	-	-
-	-	-

Issue : 0410 N

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



STRAIGHT INSULATED SQUARE FLANGE JACK**R141.277.000****CLAMP TYPE - CABLE 2.6/50+75**Series : **BNC****PACKAGING**

Standard	Unit	Other
100	'W' option	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	50	Ω
Frequency	0-4	GHz
VSWR	* + 0.000	x F(GHz) Maxi
Insertion loss	0.2	$\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (57	- F(GHz)) dB Maxi
Voltage rating	500	Veff Maxi
Dielectric withstanding voltage	1500	Veff mini
Insulation resistance	5000	M Ω mini

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating end	27	N mini
Axial force – Opposite end	27	N mini
Torque	-	N.cm mini

Recommended torque		
Mating	-	N.cm
Panel nut	-	N.cm
Clamp nut	450	N.cm
A/F clamp nut	10.000	mm

Mating life	500	Cycles mini
Weight	16.183	g

ENVIRONMENTAL

Operating temperature	-65,+165	° C
Hermetic seal	-	Atm.cm3/s
Panel leakage	-	

SPECIFICATION**CABLE ASSEMBLY**

Stripping	a	b	c	d	e	f
mm	4.00	2.00	9.00	3.00	5.00	0.00

Assembly instruction :

Clamp 01

Recommended cable(s)

RG 316
RG 179
RG 188
RG 187
KX 22A

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off	110	N mini
- torque	-	N.cm

TOOLING

Part Number	Description	Hexagon
.	.	.

OTHERS CHARACTERISTICS

* 1.6 max

Issue : **0410 N**

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

