Ceramic Surface Mount

Frequency Mixer WIDE BAND

SIM-24MH+

Level 13 (LO Power +13 dBm) 7300 to 20000 MHz

Generic photo used for illustration purposes only

CASE STYLE: HV1195

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200, 500

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW

For extended temperature range, consult factory.

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO	8
RF	4
IF	2
GROUND	1,3,5,6,7

Features

- wide bandwidth, 7300 to 20000 MHz
- low conversion loss, 5.7 dB typ.
- high L-R isolation, 36 dB typ.
- excellent IF BW, DC to 7500 MHz
- LTCC double balanced mixer
- tiny size, low profile, 0.08"
- useable as up and down converter
- aqueous washable
- protected under U.S Patent 7,027,795

Applications

- fixed satellite
- mobile
- radio location

Outline Drawing

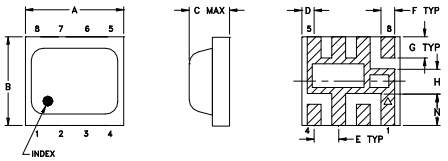

PCB Metal Land Pattern



Suggested Layout,
Tolerance to be within±.002

Outline Dimensions (inch / mm)

A	B	C	D	E	F	G
.200	.180	.087	.025	.050	.028	.043
5.08	4.57	2.2098	0.64	1.27	0.71	1.09

H	J	K	L	M	N	wt
.050	.030	.043	.204	.127	0.065	grams
1.27	0.76	1.09	5.18	3.23	1.65	0.08

Demo Board MCL P/N: TB-458+
Suggested PCB Layout (PL-284)

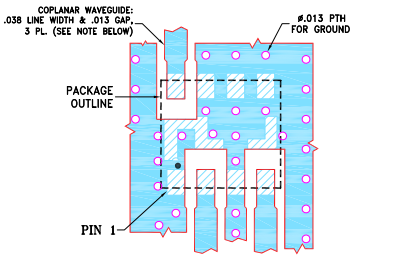

NOTES:
1. TRACE WIDTH AND GAP ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020±.0015"; COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS* (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF f_{L-f_U}	IF	Typ.	σ	Max.	Typ.	Min.	Typ.	Min.	Typ.
7300-20000	**DC-7500**								
7300-10000		7.0	0.2	8.5	43	31	19	13	20
10000-14500		5.7	0.1	7.5	36	29	18	13	16
14500-18000		7.6	0.3	9.3	26	19	15	10	18
18000-20000		8.5	0.3	10.9	28	22	25	16	25

1 dB COMPR. +9 dBm typ.

* Conversion loss at 30 MHz IF. σ is a measure of repeatability from unit to unit.

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm	LO +13dBm
7300.00	7330.10	6.65	43.77	18.89	3.94	6.09
7500.00	7530.10	6.32	39.57	19.63	3.47	8.37
8000.00	8030.10	6.12	35.84	20.35	2.76	4.99
9000.00	9030.10	7.38	48.14	19.20	4.81	2.76
9500.00	9530.10	7.00	48.23	17.30	3.84	2.56
10000.00	10030.10	6.73	45.78	16.83	3.38	2.62
10500.00	10530.10	6.29	42.22	17.92	3.17	3.22
11000.00	11030.10	5.93	40.36	19.17	2.35	2.25
12000.00	12030.10	5.84	35.97	18.67	1.99	3.49
12500.00	12530.10	5.55	34.02	18.08	1.92	2.31
13000.00	13030.10	5.70	33.28	18.18	1.48	2.28
14000.00	14030.10	5.74	34.81	19.35	1.87	2.77
14500.00	14530.10	6.21	36.04	21.54	2.52	3.07
15000.00	15030.10	6.80	35.11	28.80	2.98	4.28
15500.00	15530.10	6.92	31.74	22.63	2.49	3.20
16000.00	16030.10	7.08	27.52	16.03	2.47	2.97
17000.00	17030.10	7.94	26.56	15.86	4.43	1.25
18000.00	18030.10	8.16	29.19	24.93	2.49	1.99
19000.00	19030.10	7.75	31.50	28.10	3.12	2.04
20000.00	20030.10	9.60	26.59	22.49	2.54	1.27

Electrical Schematic

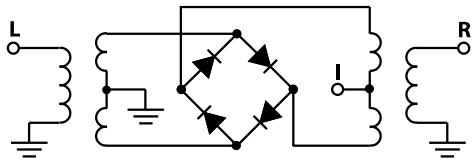

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

SIM-24MH+
CONVERSION LOSS

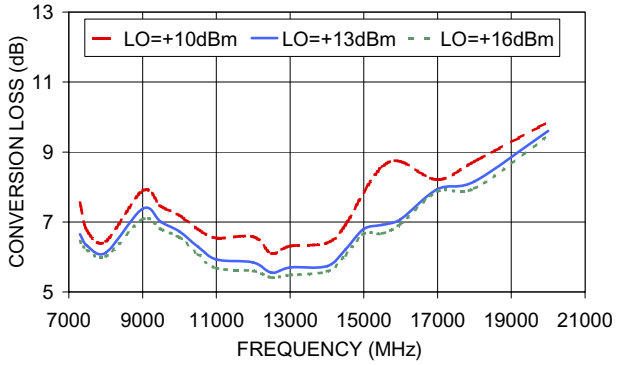

SIM-24MH+
CONVERSION LOSS VARIABLE IF

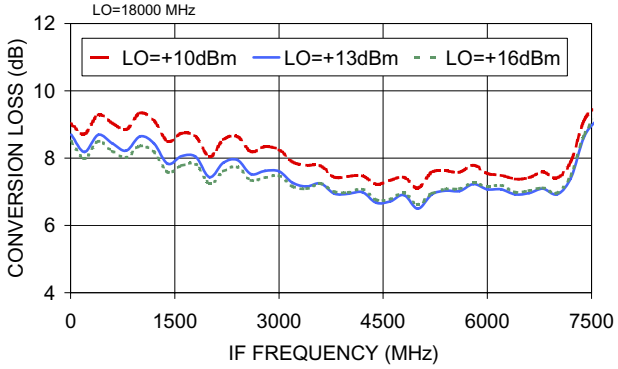

SIM-24MH+
L-R ISOLATION

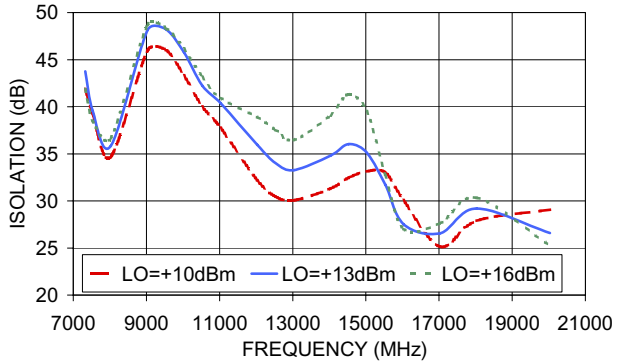

SIM-24MH+
L-I ISOLATION

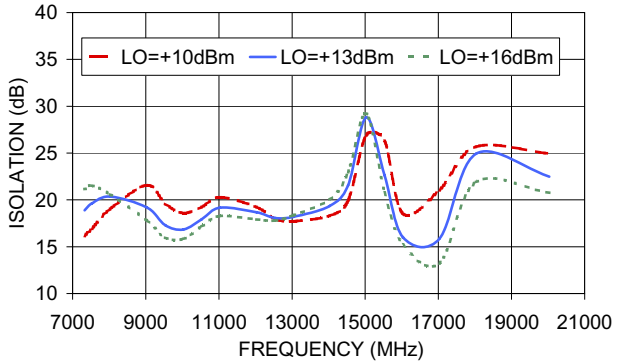

SIM-24MH+
LO VSWR

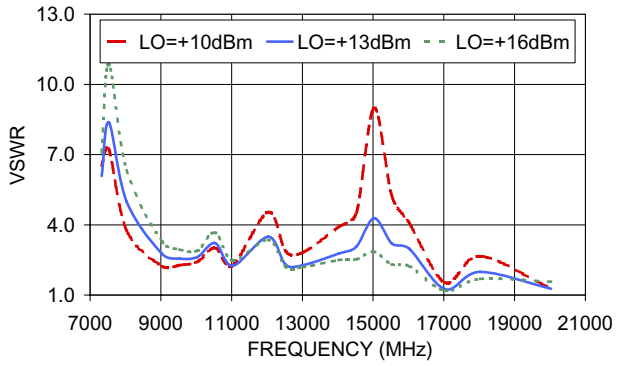

SIM-24MH+
RF VSWR

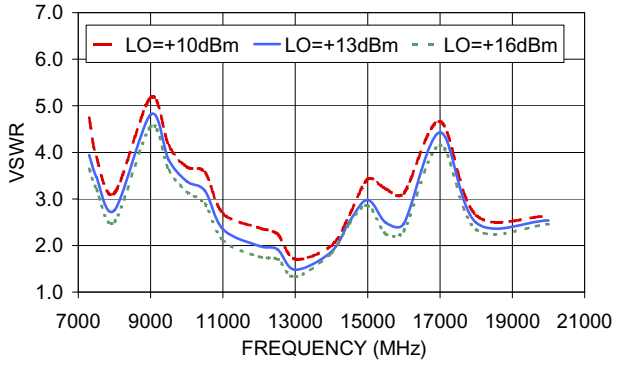

SIM-24MH+
IF VSWR

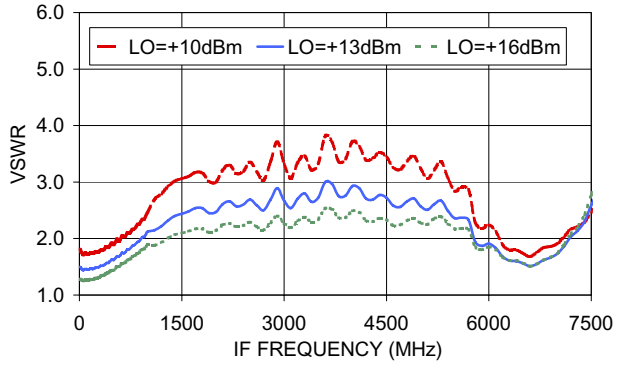

SIM-24MH+
IP3

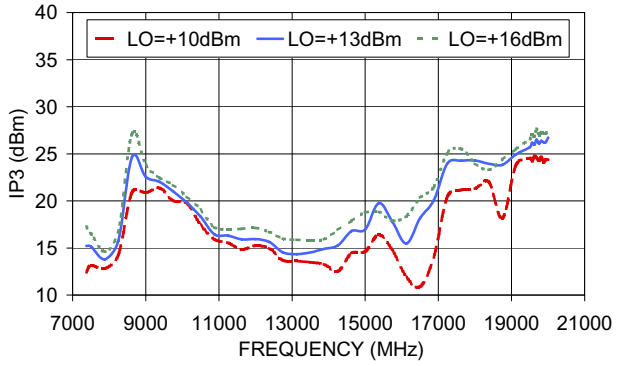

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp