

Schottky Barrier Diode

VOLTAGE
40Volt
71 FF9BH
500mA

FEATURES



- High Reliability
- Low Reverse Current
- Ultra High-speed Switching
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Green molding compound as per IEC61249 Std. .
(Halogen Free)

MECHANICAL DATA

- Case : SOT-23, Plastic
- Terminals : Solder plated,solderable per MIL-STD-750,
Method2026
- Approx. Weight : 0.0003 ounces, 0.0084 grams
- Marking : 11D

SOT-23

Unit : inch(mm)

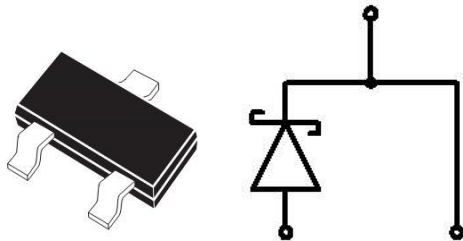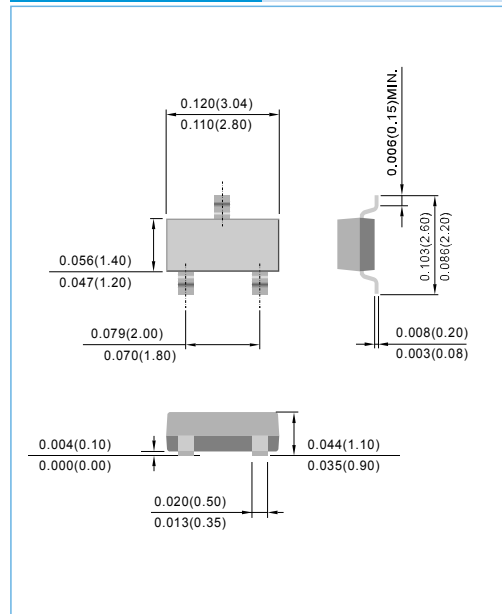

ABSOLUTE RATINGS (T_A=25°C)

Parameter	Symbol	Value	Units
Reverse Voltage	V _{RM}	40	V
Average Rectified Forward Current	I _O	500	mA
Forward Current Surge Peak (t=8.3ms)	I _{FSM}	3	A
Junction Temperature	T _J	125	°C
Storage Temperature	T _{STG}	-40 to +125	°C

ELECTRICAL CHARACTERISTICS (T_A=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Forward Voltage	V _F	-	-	0.5	V	I _F = 500mA
		-	-	0.3	V	I _F = 10mA
Reverse Current	I _R	-	-	30	uA	V _R = 10V
Junction Capacitance	C _J	-	16	-	pF	V _R = 10V, f=1MHz

ELECTRICAL CHARACTERISTICS CURVE

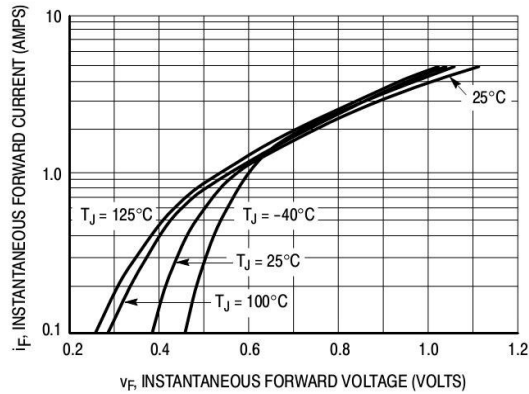


Fig. 1. Typical Forward Voltage

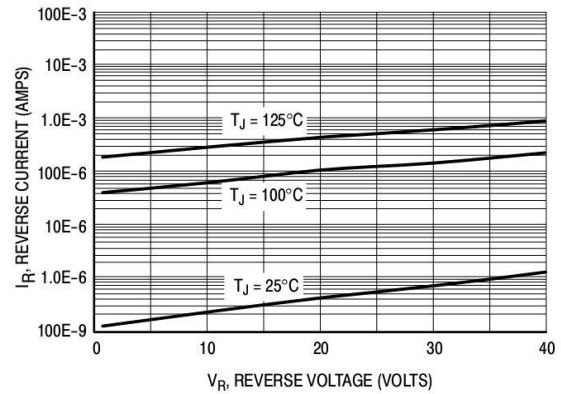


Fig. 2. Typical Reverse Current

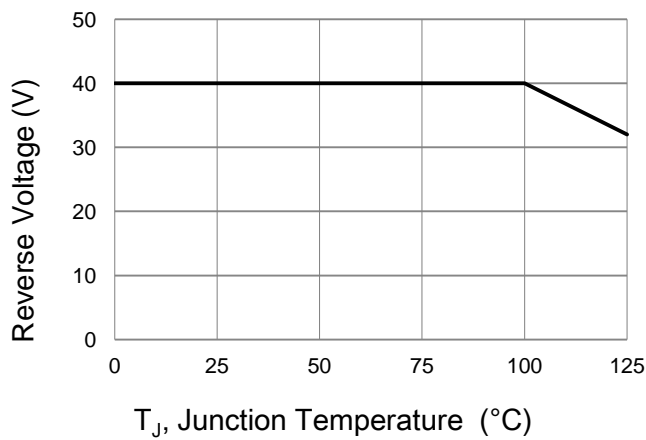


Fig.4 Operating Temperature Derating Curve


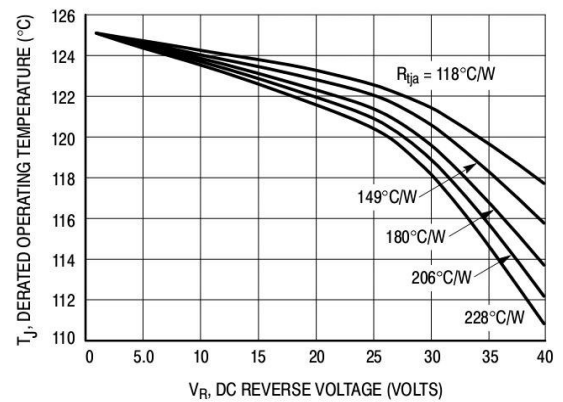


Fig. 3. Typical Operating Temperature Derating

MOUNTING PAD LAYOUT

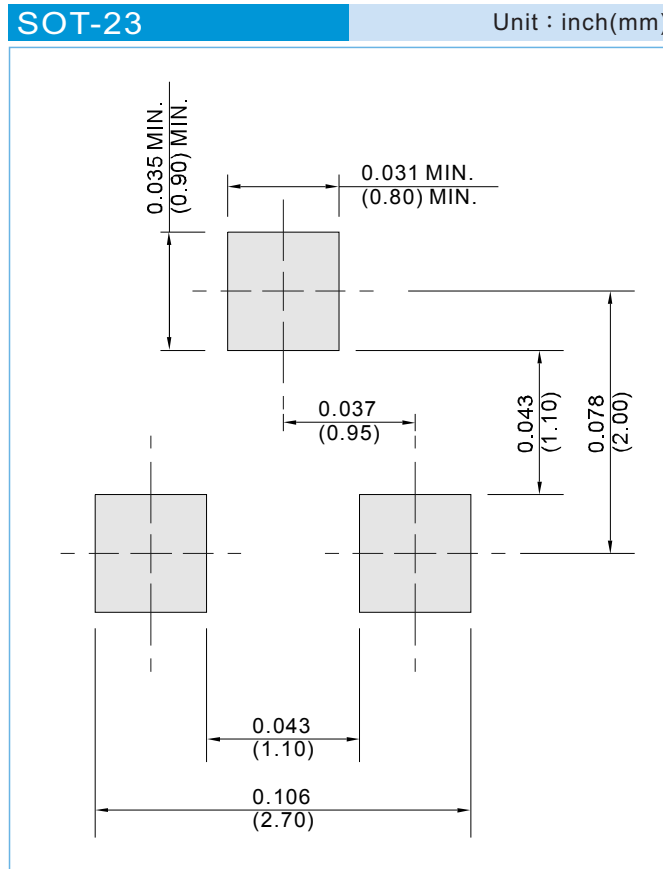

RB411D

Part No_packing code_Version

RB411D_R1_00001

RB411D_R2_00001

For example :

RB500V-40_R2_00001

Part No.

Serial number

Version code means HF

Packing size code means 13"

Packing type means T/R

Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



RB411D

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.