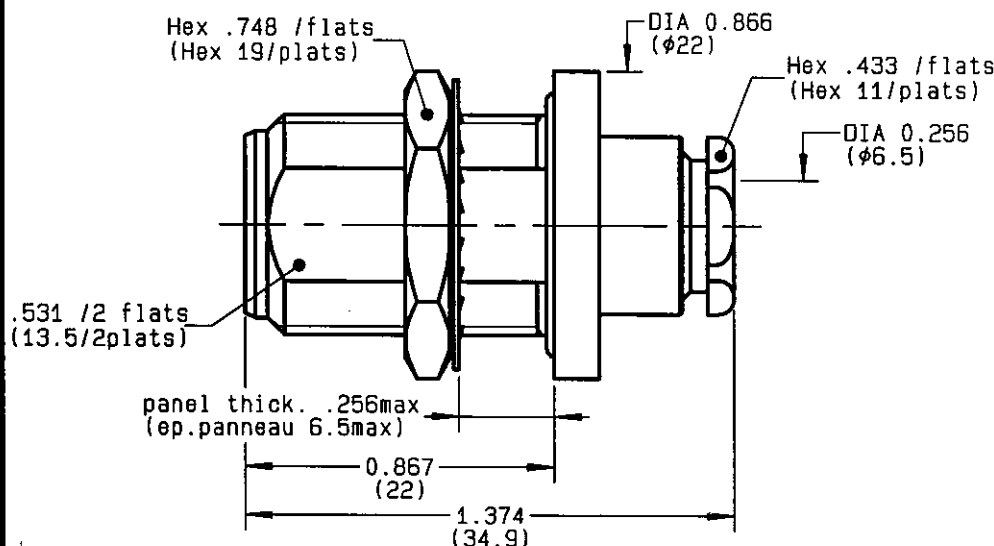



STRAIGHT BULKHEAD JACK CLAMP TYPE
PANEL SEAL CABLE 6/75+93 S
R162.328.000
SERIES
N 75

PERCAGE PANNEAU
MOUNTING HOLE


	MM		INCH	
	maxi	mini	maxi	mini
A	16.1	16	0.634	0.63
B	13.7	13.6	0.539	0.535

NOMINAL IMPEDANCE	75	Ω
FREQUENCY RANGE	0-1.5	GHz
TEMPERATURE RATING	-55/+155	$^{\circ}\text{C}$
V.S.W.R	1.06 +	x F(GHz)Maxi
RF INSERTION LOSS	0.15	$\sqrt{F}(\text{GHz})$ dB Maxi
VOLTAGE RATING	850	Veff Maxi
DIELECTRIC WITHSTANDING VOLTAGE	1500	Veff Mini
INSULATION RESISTANCE	5000	M Ω Mini
HERMETIC SEAL	NA	Atm.cm ³ /s
LEAKAGE (pressurized only)	NA	
MECHANICAL DURABILITY	500	Cycles
WEIGHT	33.7	gr
SPECIFICATION		

CABLES : KX 6A
R6 59
R6 62
OTHERS CHARACTERISTICS

CABLE RETENTION	200	N Mini
CENTER CONTACT RETENTION		
Axial force - mating end	NA	N Mini
Axial force - opposite end	NA	N Mini
Torque	NA	cm.N Mini
RECOMMENDED TORQUES		
Mating	NA	cm.N
Panel nut	500	cm.N
Clamp nut	450	cm.N

CONNECTOR PARTS MATERIALS

BODY	BRASS
OUTER CONTACT	BRASS
CENTER CONTACT	BERYLLIUM COPPER
INSULATOR	PTFE
GASKET	SILICONE RUBBER
OTHERS PIECES	BRASS

FINISH

 (all values are given)
 in micrometers

BBR 2
BBR 2
GOLD 0.5 OVER NICKEL 2
-
-
BBR 2

ISSUE
CREATION DATE
FILE PART-NUMBER
9733C00
07-APR-94


RADIALL®

 The information given here is subject to change without notice.
 Design changes may be in order to improve the product.


Connect to the future

**R162.328.000**

ISSUE 9733C00 SERIES N 75

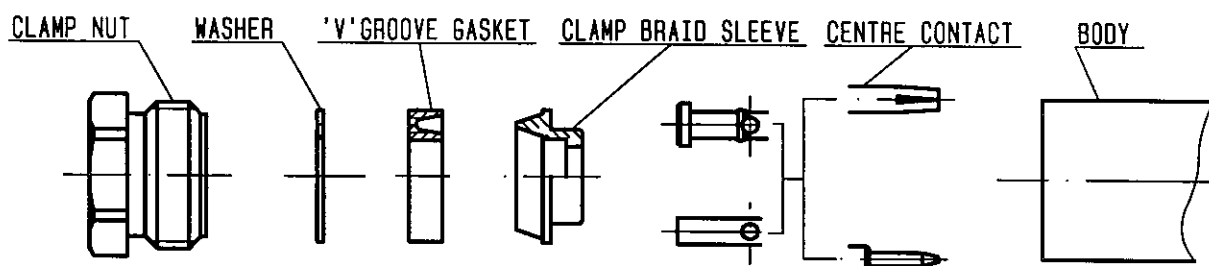

①


Strip the cable .
-
-
-

Stripping	a	b	c	d	e
inch	0.157	0.315	0	0	0.079
mm	4	8			2

②


Slide the clamp nut , the washer and the 'V'groove gasket onto the cable .
Slide clamp braid sleeve over braid .
Fold back braid and trim off surplus braid .
Trim back dielectric as shown .
-

NOTA:For air-space PE cables , "e" =0.039
Introduce insulator onto dielectric cable .

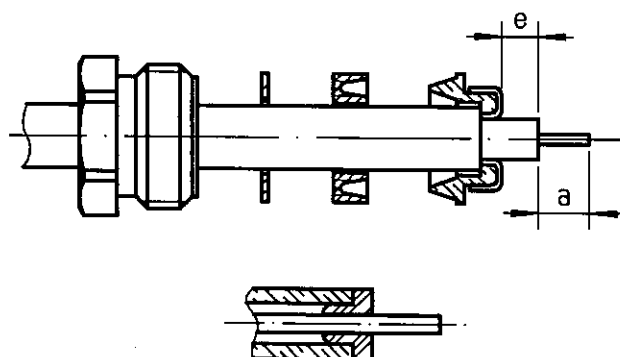

③

Solder the cable inner conductor into centre contact .
-
-
-

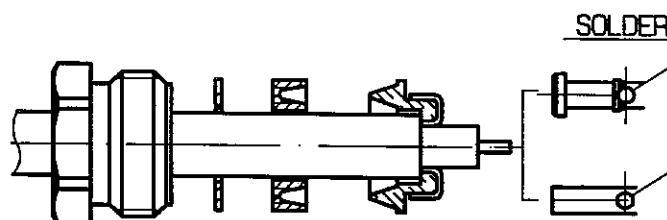

④

Screw sub-assembly into the connector body .
(recommended coupling torque 39.82 in.lb)
-
-

