


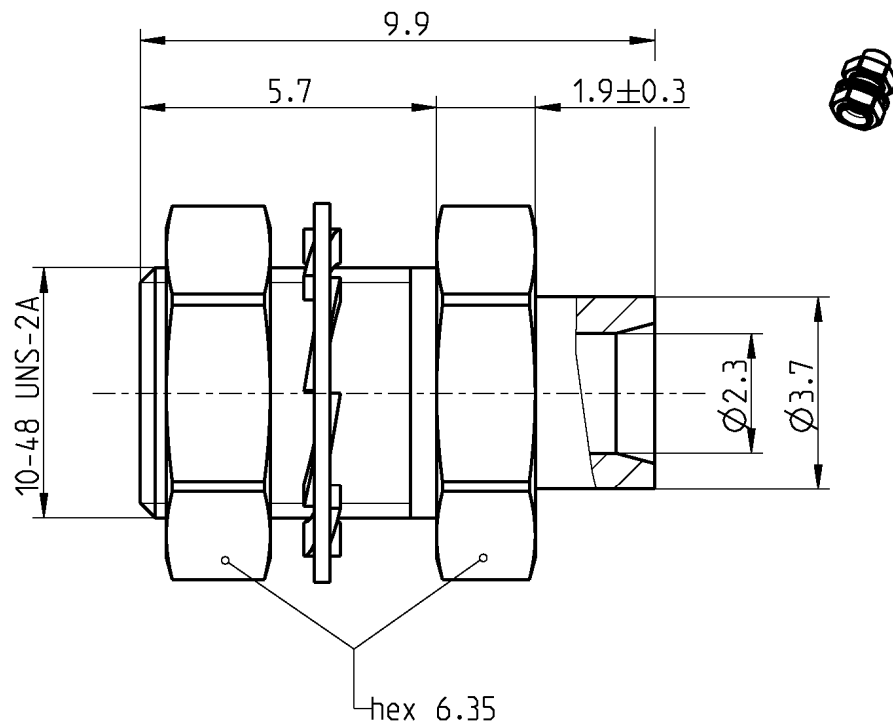

All dimensions are in mm; tolerances acc. ISO 2768 m-H

Interface

According to

MIL-STD-348A, Fig. 326

Documents

Assembly instruction

19 E4

Panel piercing

B 54

Material and plating**Connector parts**

Center contact

Outer contact

Dielectric

Material

Brass

Brass

PTFE

Plating

AuroDur®, gold plated

AuroDur®, gold plated

Electrical data

Impedance	50 Ω
Frequency	DC to 26.5 GHz
Return loss	≥ 30 dB, DC to 4 GHz ≥ 20 dB, 4 to 12 GHz ≥ 18 dB, 12 to 26.5 GHz
Insertion loss	$\leq 0.05 \times \sqrt{f(\text{GHz})}$ dB, DC to 12 GHz
Insulation resistance	≥ 5 G Ω
Center contact resistance	≤ 6.0 m Ω
Outer contact resistance	≤ 2.0 m Ω
Test voltage	500 V rms
Working voltage	335 V rms
Contact Current	1.2A DC max.

- Limitations are possible due to the used cable type -

Mechanical data

Mating cycles	≥ 1000
Center contact captivation:	≥ 7 N
Engagement force	
- smooth bore	9 N max.
Disengagement force	
- smooth bore	2.2 N min.

Environmental data

Temperature range	-65°C to +155°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition A
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

Tooling

N/A

Suitable cables

RG 405 /U, UT 85-M17

Weight

Weight 1.6 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Inge Mühlauer	20/06/08	Sa. Krautenbacher	13.03.14	e00	14-0352	T. Krojer	13.03.14

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel.: +49 8684 18-0
Fax: +49 8684 18-499
email: info@rosenberger.de

Page
2 / 2