


# Surface Mount Directional Coupler

75Ω, 6dB coupling, 5 to 1250 MHz

## DBTC-6-4-75+

### Features

- very flat coupling
- very broadband, multi octave
- temperature stable, LTCC base
- all welded construction
- leads attached for better solderability
- micro miniature coupler
- aqueous washable
- protected by US Patents 6,140,887 & 6,784,521



Generic photo used for illustration purposes only

CASE STYLE: AT790-1

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Applications

- CATV

| Available Tape and Reel at no extra cost |                       |
|------------------------------------------|-----------------------|
| Reel Size                                | Devices/Reel          |
| 7"                                       | 20, 50, 100, 200, 500 |
| 13"                                      | 1000, 2000            |

### Electrical Specifications at 25°C

| Parameter                  | Condition (MHz) | Min. | Typ.    | Max. | Unit |
|----------------------------|-----------------|------|---------|------|------|
| Frequency Range            |                 | 5    |         | 1250 | MHz  |
| Mainline Loss <sup>1</sup> | 5-50            |      | 2.2     | 3.1  | dB   |
|                            | 50-500          |      | 2.2     | 2.6  |      |
|                            | 500-1000        |      | 2.3     | 2.8  |      |
|                            | 1000-1250       |      | 2.3     | 2.9  |      |
| Nominal Coupling           | 5-1250          |      | 6.8±0.3 |      | dB   |
| Coupling Flatness(±)       | 5-1250          |      |         | ±0.8 | dB   |
| Directivity                | 5-50            | 13   | 15      |      | dB   |
|                            | 50-500          | 13   | 17      |      |      |
|                            | 500-1000        | 10   | 16      |      |      |
|                            | 1000-1250       | 7    | 12      |      |      |
| VSWR <sup>2</sup>          | 5-1000          |      | 1.4     |      | dB   |
| Input Power                | 5-50            |      |         | 0.5  | W    |
|                            | 50-500          |      |         | 1.0  |      |
|                            | 500-1000        |      |         | 1.0  |      |
|                            | 1000-1250       |      |         | 1.0  |      |

1. Includes theoretical coupled power loss of 1.02 dB at 6 dB coupling.

2. For coupled port VSWR above 500 MHz, 1.6:1 typ.

### Maximum Ratings


| Parameter             | Ratings        |
|-----------------------|----------------|
| Operating Temperature | -40°C to 85°C  |
| Storage Temperature   | -55°C to 100°C |

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

| Function             | Pin Number |
|----------------------|------------|
| INPUT                | 3          |
| OUTPUT               | 4          |
| COUPLED              | 1          |
| GROUND               | 2          |
| ISOLATE (DO NOT USE) | 6          |


### Electrical Schematic

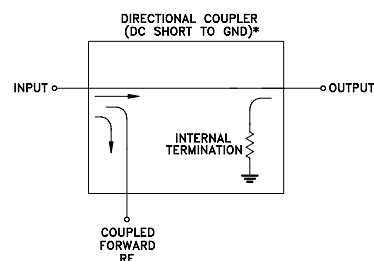


\* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.




## Outline Drawing

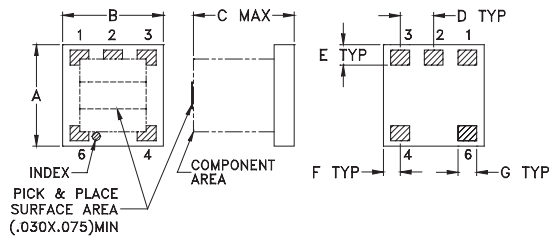

## PCB Land Pattern



## Demo Board MCL P/N: TB-279 Suggested PCB Layout (PL-151)

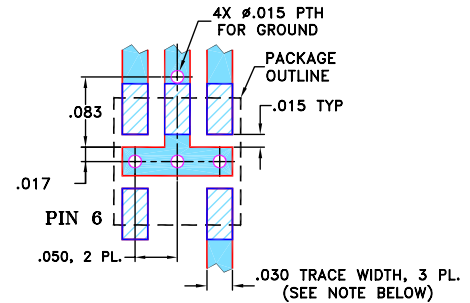




- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Outline Dimensions (inch/mm)

| A    | B    | C    | D    | E    | F    | G    | H    | J    | K    | wt    |
|------|------|------|------|------|------|------|------|------|------|-------|
| .150 | .150 | .150 | .050 | .030 | .025 | .028 | .050 | .160 | .030 | grams |
| 3.81 | 3.81 | 3.81 | 1.27 | 0.76 | 0.64 | 0.71 | 1.27 | 4.06 | 0.76 | 0.10  |

## Typical Performance Data

| Frequency (MHz) | Mainline Loss (dB) In-Out | Coupling (dB) In-Cpl | Directivity (dB) | In    | Return Loss (dB) Out | Cpl   |
|-----------------|---------------------------|----------------------|------------------|-------|----------------------|-------|
| 5.00            | 2.41                      | 6.80                 | 14.87            | 13.53 | 18.73                | 13.56 |
| 10.00           | 2.23                      | 6.72                 | 15.49            | 14.64 | 24.15                | 14.72 |
| 100.00          | 2.21                      | 6.78                 | 15.54            | 15.55 | 30.88                | 15.56 |
| 400.00          | 2.24                      | 6.94                 | 16.04            | 16.09 | 18.42                | 14.47 |
| 600.00          | 2.26                      | 7.01                 | 15.94            | 16.32 | 16.33                | 13.60 |
| 800.00          | 2.28                      | 7.16                 | 15.12            | 17.08 | 15.48                | 13.11 |
| 1000.00         | 2.32                      | 7.36                 | 13.45            | 18.22 | 15.61                | 12.36 |
| 1050.00         | 2.34                      | 7.44                 | 12.88            | 18.62 | 15.75                | 12.10 |
| 1100.00         | 2.40                      | 7.51                 | 12.50            | 18.66 | 15.58                | 12.04 |
| 1250.00         | 2.46                      | 7.75                 | 11.03            | 19.78 | 14.75                | 11.49 |

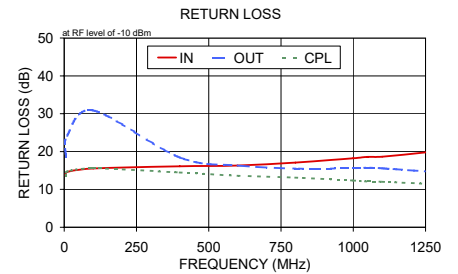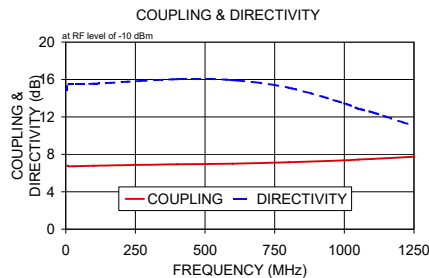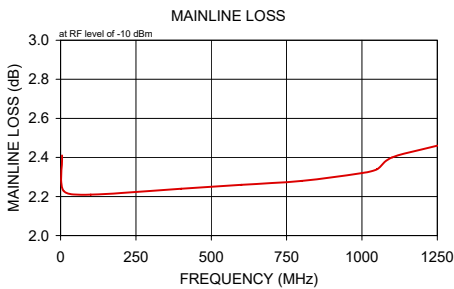

## Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)