

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION
© COPYRIGHT — TE Connectivity Ltd.	ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL DRAWN	06AUG2019	RV	DH


GP * *

*


BASIC ASSEMBLY		
CODE	VOLTAGE	PART NO.
GPA	12 VDC	34002-01
GPAN	12 VDC W/BLOWOUT DEVICE	34002-07
GPB	24 VDC	34002-02
GPBN	24 VDC W/BLOWOUT DEVICE	34002-08
GPC	48 VDC	34002-03
GPCN	48 VDC W/BLOWOUT DEVICE	34002-09
GPD	125 VDC	34002-04
GPDN	125 VDC W/BLOWOUT DEVICE	34002-10
GPF	250 VDC	34002-05
GPFN	250 VDC W/BLOWOUT DEVICE	34002-11
GPK	140 VDC	34002-06
GPKN	140 VDC W/BLOWOUT DEVICE	34002-12
GPV	36 VDC	34002-13
GPVN	36 VDC W/BLOWOUT DEVICE	34002-14
GPE	110 VDC	34002-15
GPEN	110 VDC W/BLOWOUT DEVICE	34002-16
GPAA	12 VDC LOW LEVEL LOADS	51871-08
GPBA	24 VDC LOW LEVEL LOADS	51871-09
GPCA	48 VDC LOW LEVEL LOADS	51871-10
GPDA	110 VDC LOW LEVEL LOADS	51871-11
GPYA	6 VDC LOW LEVEL LOADS	51871-07

OPTIONS			
CODE R	CODE Q	CODE QR	
COIL SUPPR ASS'Y P/N	IND.LIGHT ASS'Y P/N	COMBINATION ASS'Y P/N	
34114-01	N/A	N/A	
34114-01	N/A	N/A	
34114-01	34113-05	34115-05	
34114-01	34113-05	34115-05	
34114-01	N/A	N/A	
34114-01	N/A	N/A	
34114-01	34113-01	34115-01	
34114-01	34113-01	34115-01	
34114-02	34113-02	34115-02	
34114-02	34113-02	34115-02	
34114-01	34113-01	34115-01	
34114-01	34113-01	34115-01	
34114-01	N/A	N/A	
34114-01	N/A	N/A	
34114-01	N/A	N/A	
34114-01	N/A	N/A	

ACCESSORIES		
CATALOG CODE	DESCRIPTION	PART NO.
CR0064	REAR CONNECTED SOCKET WITH Q.C. TERMINAL	34140-01
CR0191	REAR CONNECTED SOCKET WITH SCREW TERMINAL	34140-02
CR0179	EXTRACTING HANDLE	34141-01
	MULTIPLE SOCKET	34058-01
	HARDWARE FOR MULTIPLE SOCKET	34065-01
CR0066	FRONT TERMINAL SOCKET WITH Q.C. TERMINAL	34142-01
CR0067	FRONT TERMINAL SOCKET WITH SCREW TERMINAL	34142-02
	SURFACE MOUNTING SOCKET, PACKAGED	34071-01
CR0189	LOCKING SPRING KIT	34143-01
	LOCKING SPRING	34069-01
CR0070	LOCKING SPRING KIT	34144-01
	KEY PLUG	34072-01
CR0090	LOCKING SPRING KIT	34145-01
CR0091	DUAL REAR CONNECTED SOCKET, SOLDER TERMINAL	34146-01
CR0092	INTERLOCKING PINS, BAGGED (100)	34092-01
CR0095	SURFACE MOUNTING SOCKET, MODIFIED, PACKAGED	34095-01
CR0190	MAGNETIC BLOW OUT KIT	34093-01
CR0001	RELAY SOCKET KIT	34122-01
CR0002	RELAY SOCKET KIT	34121-01
CR0111	RETAINING SPRING KIT	34123-01
CR0188	ORIENTING PIN (SQUARE)	34007-01
CR0133	LOCKING SPRING KIT	34147-01
CR0155	LOCKING SPRING KIT	34148-01
CR0156	LOCKING SPRING KIT, HD	34217-01

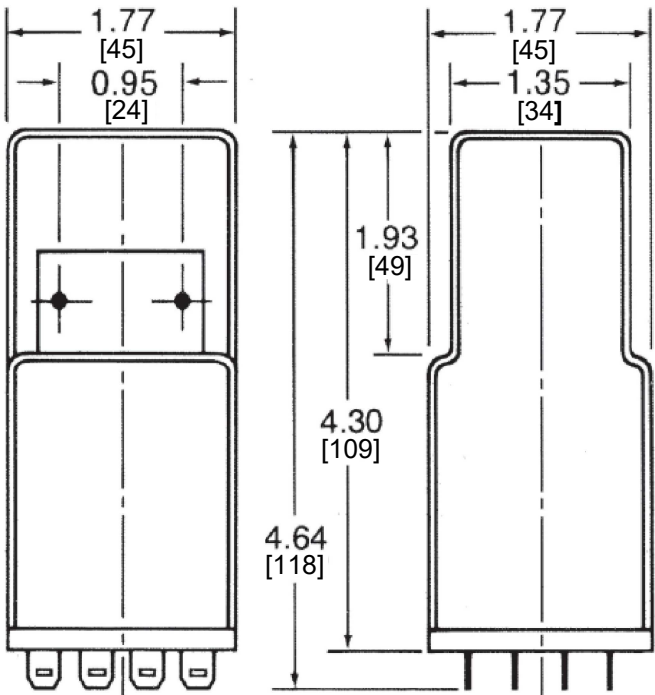

Outline Dimensions

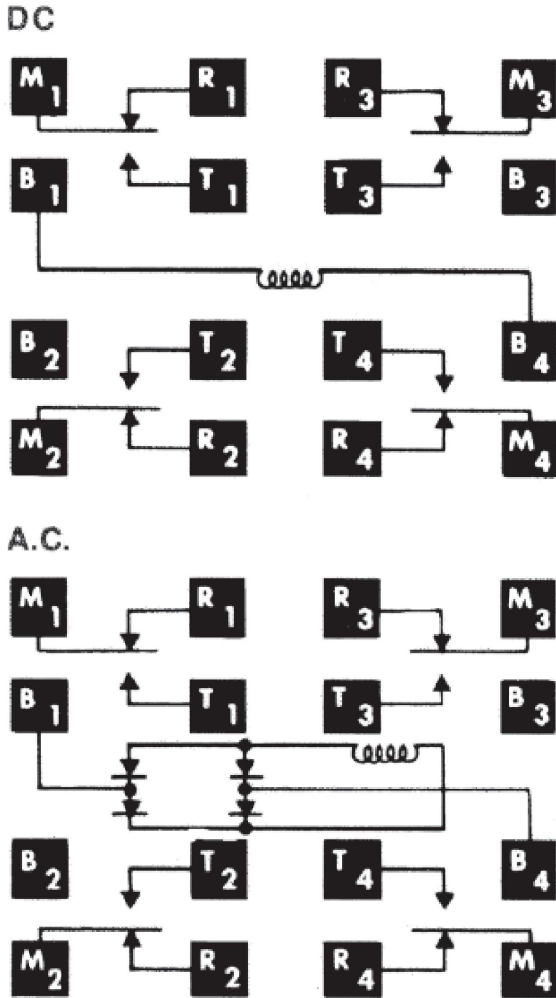

Wiring Diagrams (Bottom Views)


Ordering Information

Typical Part No. ►		GP	I	N
1. Basic Series:		GP = Non-latching Control Relay ML = Magnetic Latching Control Relay		
2. Coil Voltage:		A = 12VDC G = 24VAC, 60 Hz. B = 24VDC I = 120VAC, 60 Hz. C = 48VDC J = 220VAC, 60 Hz. D = 125VDC F = 250VDC		
3. Options:		N = Magnetic Blow-out Device Q = Light to indicate coil energization (GP only. 120VAC, 125VDC, 220VAC and 250VDC voltages only.) R = Internal diode to suppress coil de-energization transient. (GP only. When used on DC unit, relay release time increases to same value as AC unit).		

NOTES:

- OPTION "Q" AND OPTION COMBINATION "QR" ONLY AVAILABLE ON RELAYS WITH OPERATING VOLTAGES OF 24V & 120V OR GREATER.
- OUTLINE AND DIM. DWG. : SS-651.
- TEST PER TP-GPR-01.
- FOR DIELECTRIC TEST OF COILS SEE TP-GR-02.

ALL DIMENSIONS ARE IN INCHES[MM].

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RV 06AUG2019	TE Connectivity			
		CHK RV 06AUG2019				
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	APVD DH 06AUG2019	NAME GP SERIES, 10AMPS CONTROL RELAY - -			
		PRODUCT SPEC -				
		APPLICATION SPEC -				
		WEIGHT -				
		MATERIAL -	FINISH -			
CUSTOMER DRAWING			SCALE NTS	SHEET 1 OF 3	REV A	

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , - .

© COPYRIGHT — TE Connectivity Ltd.


ALL RIGHTS RESERVED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

Accessories for GP/ML/TR Series Control Relays


Front Connected Sockets









Cat. No. CR0001
With captive clamp terminals

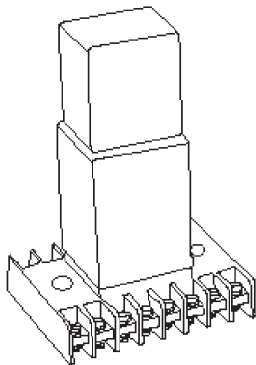

Cat. No. CR0095
With (#6) screw terminals



Cat. No. CR0067
With (#6) screw terminals

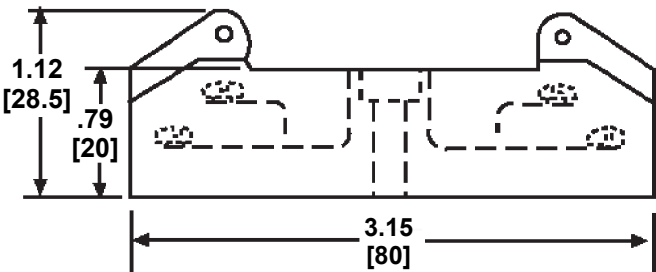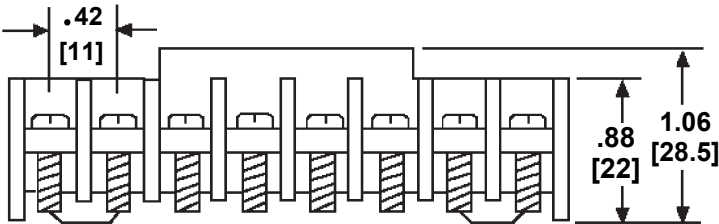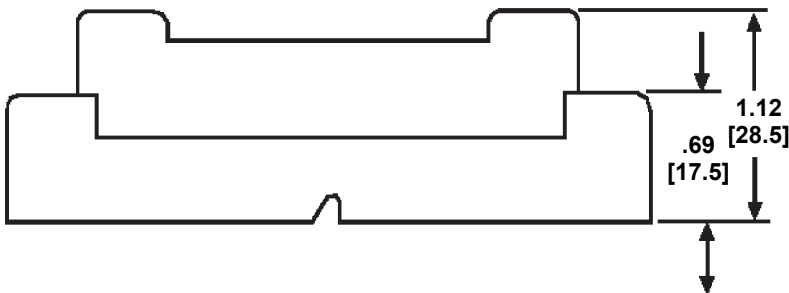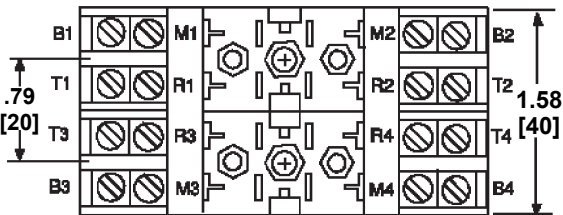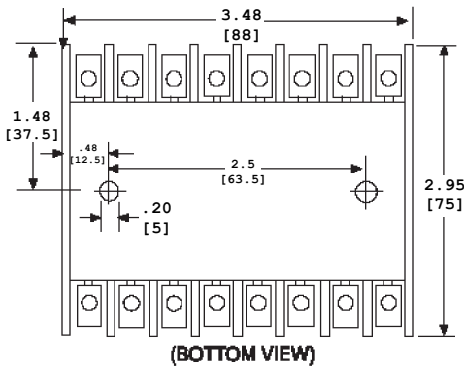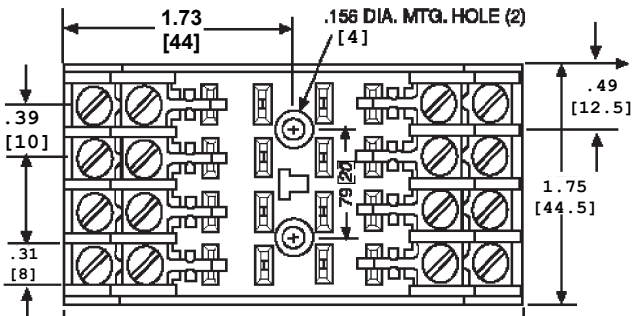

ALL DIMENSIONS ARE IN INCHES[MM].

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RV 06AUG2019	 TE Connectivity		
		CHK RV 06AUG2019			
		APVD DH 06AUG2019	NAME GP SERIES, 10AMPS CONTROL RELAY		
		PRODUCT SPEC —			
		APPLICATION SPEC —			
		WEIGHT —	SIZE A3	CAGE CODE —	DRAWING NO. ©GP-SERIES
		CUSTOMER DRAWING	SCALE NTS	SHEET 2 of 3	REV A

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


© COPYRIGHT — TE Connectivity Ltd.

ALL RIGHTS RESERVED.



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—


Hold Down (Locking) Springs

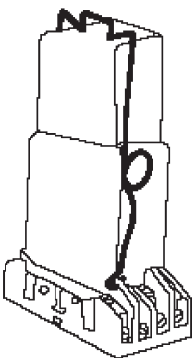

Cat. No. CR0069
For socket: CR0067

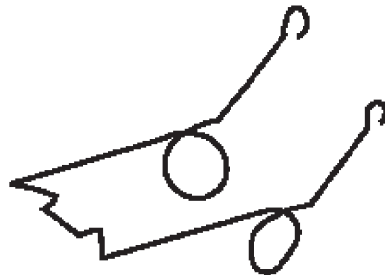


Cat. No. CR0070
For socket: CR0095

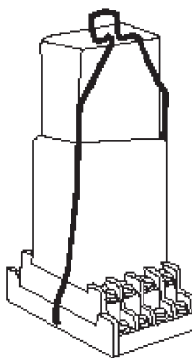


Cat. No. CR0111
For sockets: CR0001 & CR0002



Heavy-duty Hold Down (Locking) Straps




*Cat. No. CR0133
For socket: CR0001 & CR0002



*Cat. No. CR0155
For socket: CR0095


* Catalog number includes strap, strap plate and necessary brackets.

Magnetic Blowout Device




Cat. No. CR0190
Reduces arcing on the relay contacts when they make or break contact, either upon energizing or de-energizing, resulting in less contact degradation. Extends the life of the contact.

Extracting Handle



Cat. No. CR0179
Used to remove GP, ML and TR units from mounting bases.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RV	06AUG2019	 TE Connectivity			
		CHK RV	06AUG2019				
		APVD DH	06AUG2019				
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC		NAME GP SERIES, 10AMPS CONTROL RELAY — —			
	0 PLC ± —	APPLICATION SPEC					
	1 PLC ± —	—					
MATERIAL —	2 PLC ± —	WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	3 PLC ± —	—		A3	—	C=GP—SERIES	—
	4 PLC ± —						
	ANGLES ± —						
	FINISH						
CUSTOMER DRAWING		SCALE	NTS	SHEET	3 OF 3	REV	A