

KES SERIES

THREE PHASE GENERAL PURPOSE EMI FILTER

SINGLE STAGE WYE CONFIGURATION

INTRODUCTION

Three phase General Purpose Filters designed to be used in wide range of applications.

APPLICATION

- Industrial Automation
- HVAC
- CNC Machines

FEATURES

- General Purpose 3 Phase with neutral
- Standard Attenuation Performance
- Chassis Mounting, Din Rail Mount


APPROVALS AND COMPLIANCE

- UL Recognised
- CSA Certified



STANDARD

NEW DIN RAIL

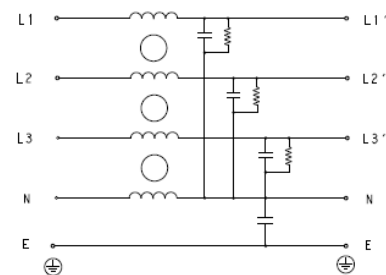

Specifications

Electrical Characteristics	
Maximum Continuous Operating Voltage	440/520VAC
Current Ratings	1A to 150A @40°C, Din Mount 1A to 60A @40°C
Operating Frequency	50/60Hz
High Potential Test Voltage -440VAC	Line to Ground 2632VDC for 1 Minute
	Line to Line 1892VDC for 1 Minute
High Potential Test Voltage -520VAC	Line to Ground 2856VDC for 1 Minute
	Line to Line 2236VDC for 1 Minute
Overload Capability	135% of Rated current for 15 minutes

KES Series

Three Phase General Purpose EMI Filter

Functional Characteristics	
Operating Temperature Range	-25°C to +85°C
Climatic Category	25/85/21
Termination (Depends on Current Rating)	Quick Connect (1-10A)/Bolt & Nut (15-150A)/Shock Proof (75-100A)
Flammability Corresponding to	UL 94 V-0

Reference Standards	
Design Corresponding to	UL 60939-3 and CSA 22.2 No.8-13

Selection Table - Standard Version



TE Ordering Number	Catalog Number	Rated Current @40°C	Rated Voltage @40°C	Leakage Current (mA)	Weight (Kgs)	Termination		
								
1-1609966-0	1KESS1AFPW	1A	440 VAC	3	0.26	6.3 x 0.8		
1-1609966-1	3KESS1AFPW	3A	440 VAC	3	0.26	6.3 x 0.8		
1-1609966-2	6KESS1AFPW	6A	440 VAC	3	0.26	6.3 x 0.8		
1-1609966-3	10KESS1AFPW	10A	440 VAC	3	0.26	6.3 x 0.8		
1-1609966-4	15KESS6AFPW	15A	440 VAC	3	0.7		M5	
1-1609966-5	20KESS6AFPW	20A	440 VAC	3	0.7		M5	
1-1609966-6	25KESS6AFPW	25A	440 VAC	5	0.7		M5	
1-1609966-7	30KESS6AFPW	30A	440 VAC	5	0.7		M5	
1-1609966-8	40KESS6AFPW	40A	440 VAC	5	0.7		M5	
1-1609966-9	50KESS6AFPW	50A	440 VAC	5	1.2		M6	
2-1609966-0	60KESS6AFPW	60A	440 VAC	5	1.2		M6	
2-1609966-1	75KESS6AFPW	75A	440 VAC	6	9		M8	
2-1609966-2	80KESS6AFPW	80A	440 VAC	6	9		M8	
2-1609966-3	100KESS6AFPW	100A	440 VAC	6	9		M10	
2-1609966-4	125KESS6AFPW	125A	440 VAC	8	9		M10	
2-1609966-5	150KESS6AFPW	150A	440 VAC	8	9		M10	
2-1609966-6	75KESS10AFPW	75A	440 VAC	6	9			16
2-1609966-7	80KESS10AFPW	80A	440 VAC	6	9			25
2-1609966-8	100KESS10AFPW	100A	440 VAC	6	9			25
4-1609966-0	1KESS1BFPW	1A	520 VAC	3	0.26	6.3 x 0.8		

KES Series


Three Phase General Purpose EMI Filter

TE Ordering Number	Catalog Number	Rated Current @40°C	Rated Voltage @40°C	Leakage Current (mA)	Weight (Kgs)	Termination		
								
4-1609966-1	3KES1BFPW	3A	520 VAC	3	0.26	6.3 x 0.8		
4-1609966-2	6KES1BFPW	6A	520 VAC	3	0.26	6.3 x 0.8		
4-1609966-3	10KES1BFPW	10A	520 VAC	3	0.26	6.3 x 0.8		
4-1609966-4	15KES6BFPW	15A	520 VAC	3	0.7		M5	
4-1609966-5	20KES6BFPW	20A	520 VAC	3	0.7		M5	
4-1609966-6	25KES6BFPW	25A	520 VAC	5	0.7		M5	
4-1609966-7	30KES6BFPW	30A	520 VAC	5	0.7		M5	
4-1609966-8	40KES6BFPW	40A	520 VAC	5	0.7		M5	
4-1609966-9	50KES6BFPW	50A	520 VAC	5	1.2		M6	
5-1609966-0	60KES6BFPW	60A	520 VAC	5	1.2		M6	
5-1609966-1	75KES6BFPW	75A	520 VAC	6	9		M8	
5-1609966-2	80KES6BFPW	80A	520 VAC	6	9		M8	
5-1609966-3	100KES6BFPW	100A	520 VAC	6	9		M10	
5-1609966-4	125KES6BFPW	125A	520 VAC	8	9		M10	
5-1609966-5	150KES6BFPW	150A	520 VAC	8	9		M10	
5-1609966-6	75KES10BFPW	75A	520 VAC	6	9			16
5-1609966-7	80KES10BFPW	80A	520 VAC	6	9			25
5-1609966-8	100KES10BFPW	100A	520 VAC	6	9			25

Selection Table - Din Rail Mount




NEW



VERTICAL MOUNT

Note: Din Rail not supplied



HORIZONTAL MOUNT

TE Ordering Number	Catalog Number	Din Type	Rated Current @40°C	Rated Voltage @40°C	Leakage Current (mA)	Weight (Kgs)	Termination	
								
3-1609966-0	1KES1AFPWDM	DUAL	1A	440 VAC	3	0.36	6.3 x 0.8	
3-1609966-1	3KES1AFPWDM	DUAL	3A	440 VAC	3	0.36	6.3 x 0.8	
3-1609966-2	6KES1AFPWDM	DUAL	6A	440 VAC	3	0.36	6.3 x 0.8	
3-1609966-3	10KES1AFPWDM	DUAL	10A	440 VAC	3	0.36	6.3 x 0.8	
3-1609966-4	15KES6AFPWDM	DUAL	15A	440 VAC	3	0.8		M5
3-1609966-5	20KES6AFPWDM	DUAL	20A	440 VAC	3	0.8		M5

KES Series

Three Phase General Purpose EMI Filter

TE Ordering Number	Catalog Number	Din Type	Rated Current @40°C	Rated Voltage @40°C	Leakage Current (mA)	Weight (Kgs)	Termination	
								
3-1609966-6	25KESS6AFPWDM	DUAL	25A	440 VAC	5	0.8		M5
3-1609966-7	30KESS6AFPWDM	DUAL	30A	440 VAC	5	0.8		M5
3-1609966-8	40KESS6AFPWDM	DUAL	40A	440 VAC	5	0.8		M5
3-1609966-9	50KESS6AFPWHM	HORIZONTAL	50A	440 VAC	5	1.3		M6
6-1609966-0	60KESS6AFPWHM	HORIZONTAL	60A	440 VAC	5	1.3		M6
6-1609966-1	50KESS6AFPWVM	VERTICAL	50A	440 VAC	5	1.4		M6
6-1609966-2	60KESS6AFPWVM	VERTICAL	60A	440 VAC	5	1.4		M6
6-1609966-3	1KESS1BFPWDM	DUAL	1A	520 VAC	3	0.36	6.3 x 0.8	
6-1609966-4	3KESS1BFPWDM	DUAL	3A	520 VAC	3	0.36	6.3 x 0.8	
6-1609966-5	6KESS1BFPWDM	DUAL	6A	520 VAC	3	0.36	6.3 x 0.8	
6-1609966-6	10KESS1BFPWDM	DUAL	10A	520 VAC	3	0.36	6.3 x 0.8	
6-1609966-7	15KESS6BFPWDM	DUAL	15A	520 VAC	3	0.8		M5
6-1609966-8	20KESS6BFPWDM	DUAL	20A	520 VAC	3	0.8		M5
6-1609966-9	25KESS6BFPWDM	DUAL	25A	520 VAC	5	0.8		M5
7-1609966-0	30KESS6BFPWDM	DUAL	30A	520 VAC	5	0.8		M5
7-1609966-1	40KESS6BFPWDM	DUAL	40A	520 VAC	5	0.8		M5
7-1609966-2	50KESS6BFPWHM	HORIZONTAL	50A	520 VAC	5	1.3		M6
7-1609966-3	60KESS6BFPWHM	HORIZONTAL	60A	520 VAC	5	1.3		M6
7-1609966-4	50KESS6BFPWVM	VERTICAL	50A	520 VAC	5	1.4		M6
7-1609966-5	60KESS6BFPWVM	VERTICAL	60A	520 VAC	5	1.4		M6

Connectors Cross Section

		4	10	16	25	50
Wire Section (mm²)		4mm²	10 mm²	16 mm²	25 mm²	50 mm²
Wire Section (AWG)		12AWG	8 AWG	6 AWG	4 AWG	1/0 AWG
Wire Stripping		Max 10mm	max 13.5 mm	max 17 mm	max 17 mm	max 20 mm
Max Recommended Torque		0.5 Nm/4.5 in.lbs	1.2 Nm/10.8 in.lbs	2-2.2 Nm/18-19.8 in.lbs	2 Nm/18 in.lbs	6 Nm/54 in.lbs

Insertion Loss (Typical) - Measured in Closed 50Ω System


		Common Mode 50Ω/50Ω								
		Frequency in MHz								
		0.01	0.05	0.15	0.5	1	3	5	10	30
Current Rating	1A	3	3	4	11	22	40	35	36	43
	3A	2	2	19	22	40	38	45	47	32
	6A	4	5	13	19	28	35	40	45	31
	10A	3	4	15	25	29	32	30	35	29
	15A	4	4	9	20	38	36	46	30	23
	20A	4	5	15	25	45	48	42	40	29
	25A	5	5	5	18	23	35	40	44	24
	30A	4	4	9	21	28	42	58	39	20
	40A	4	5	11	29	34	42	56	39	23
	50A	4	4	11	24	32	42	48	34	20
	60A	4	5	10	25	30	39	50	38	24
	75A	2	3	7	22	29	44	43	30	16
	80A	5	5	8	15	20	22	35	42	45
	100A	3	4	3	17	23	25	20	32	38
	125A	2	2	5	15	18	25	30	40	46
	150A	3	4	11	25	35	34	28	22	11

KES Series


Three Phase General Purpose EMI Filter

		Differential Mode 50Ω/50Ω								
		Frequency in MHz								
		0.01	0.05	0.15	0.5	1	3	5	10	30
Current Rating	1A	3	4	6	19	27	30	36	38	49
	3A	4	5	26	32	29	35	37	46	44
	6A	4	3	15	25	30	38	45	51	49
	10A	4	5	17	26	30	31	32	36	40
	15A	6	8	12	16	30	33	40	38	47
	20A	3	5	10	20	28	36	29	23	19
	25A	4	4	19	22	26	32	48	50	52
	30A	17	18	22	39	46	29	26	20	16
	40A	17	18	21	34	43	40	29	19	33
	50A	14	20	28	42	50	30	26	20	22
	60A	11	18	22	39	45	28	24	17	15
	75A	37	39	46	53	41	31	27	19	17
	80A	5	6	10	20	24	30	36	38	42
	100A	8	9	14	37	40	44	35	30	40
	125A	3	3	9	17	19	31	35	42	42
	150A	34	39	57	40	33	24	20	15	10

Common Mode Insertion Loss (Typical in dB - Refer to table above)

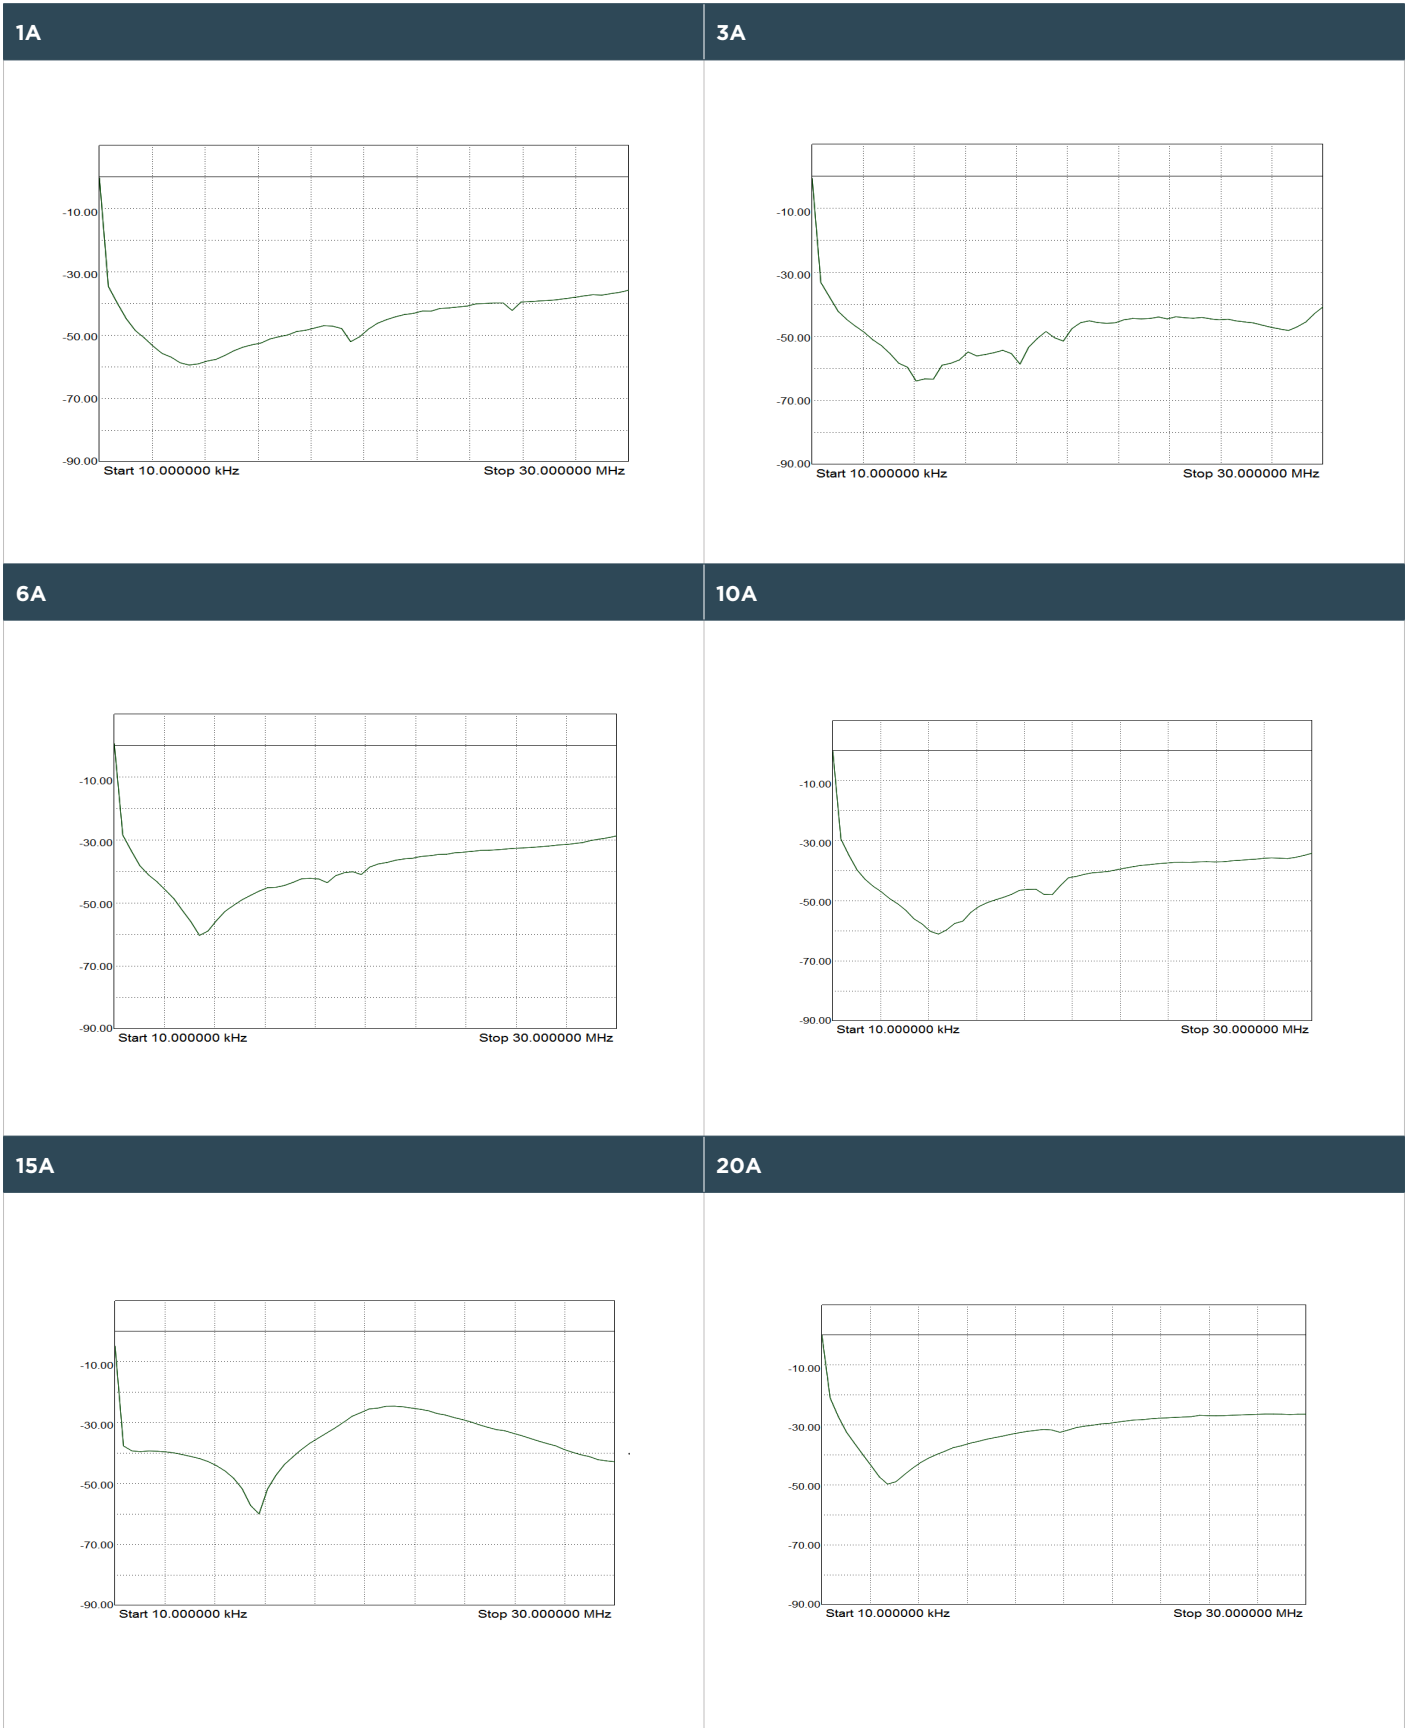


Common Mode Insertion Loss (Typical in dB - Refer to table above)

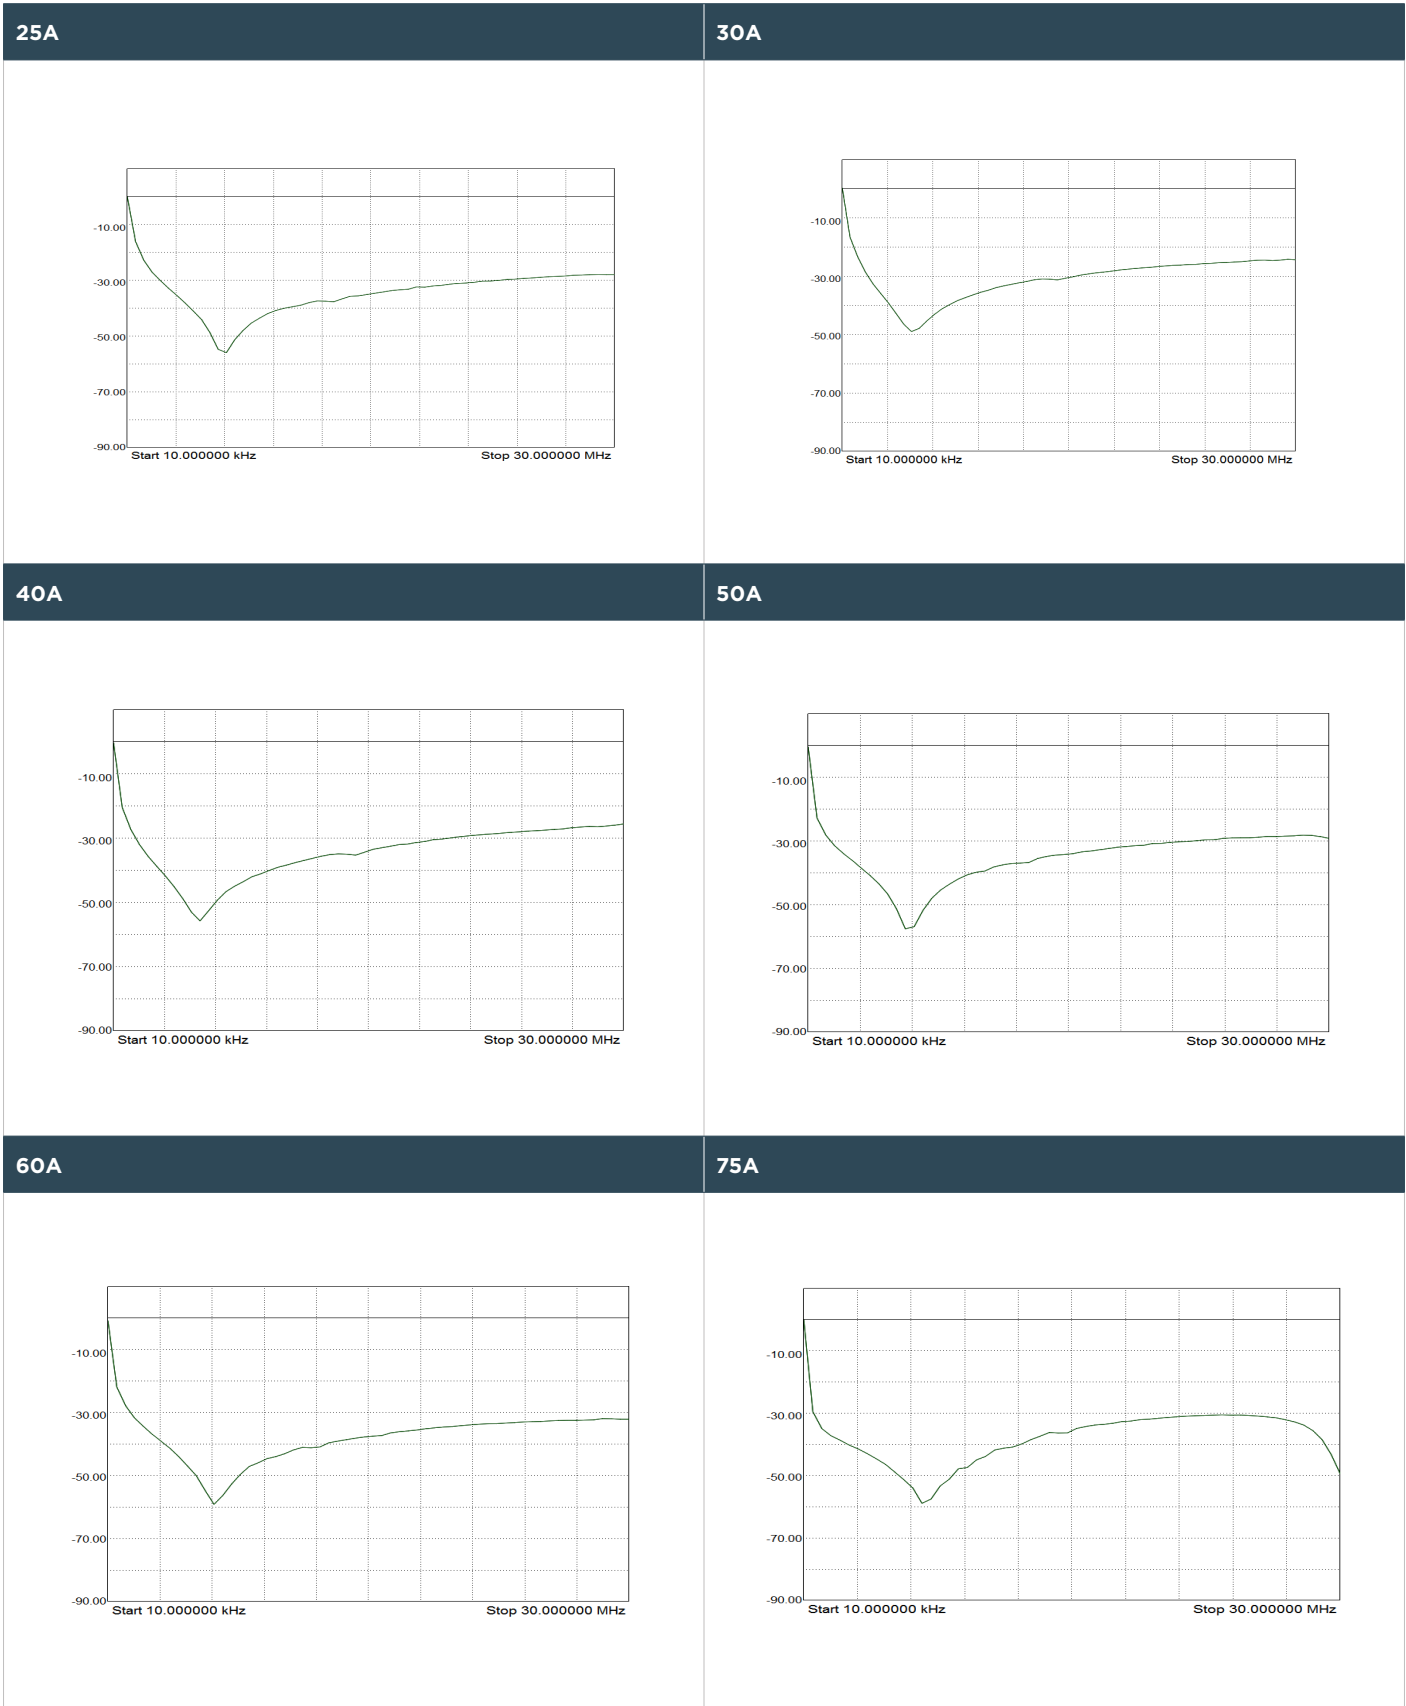

KES Series

Three Phase General Purpose EMI Filter






Common Mode Insertion Loss (Typical in dB - Refer to table above)

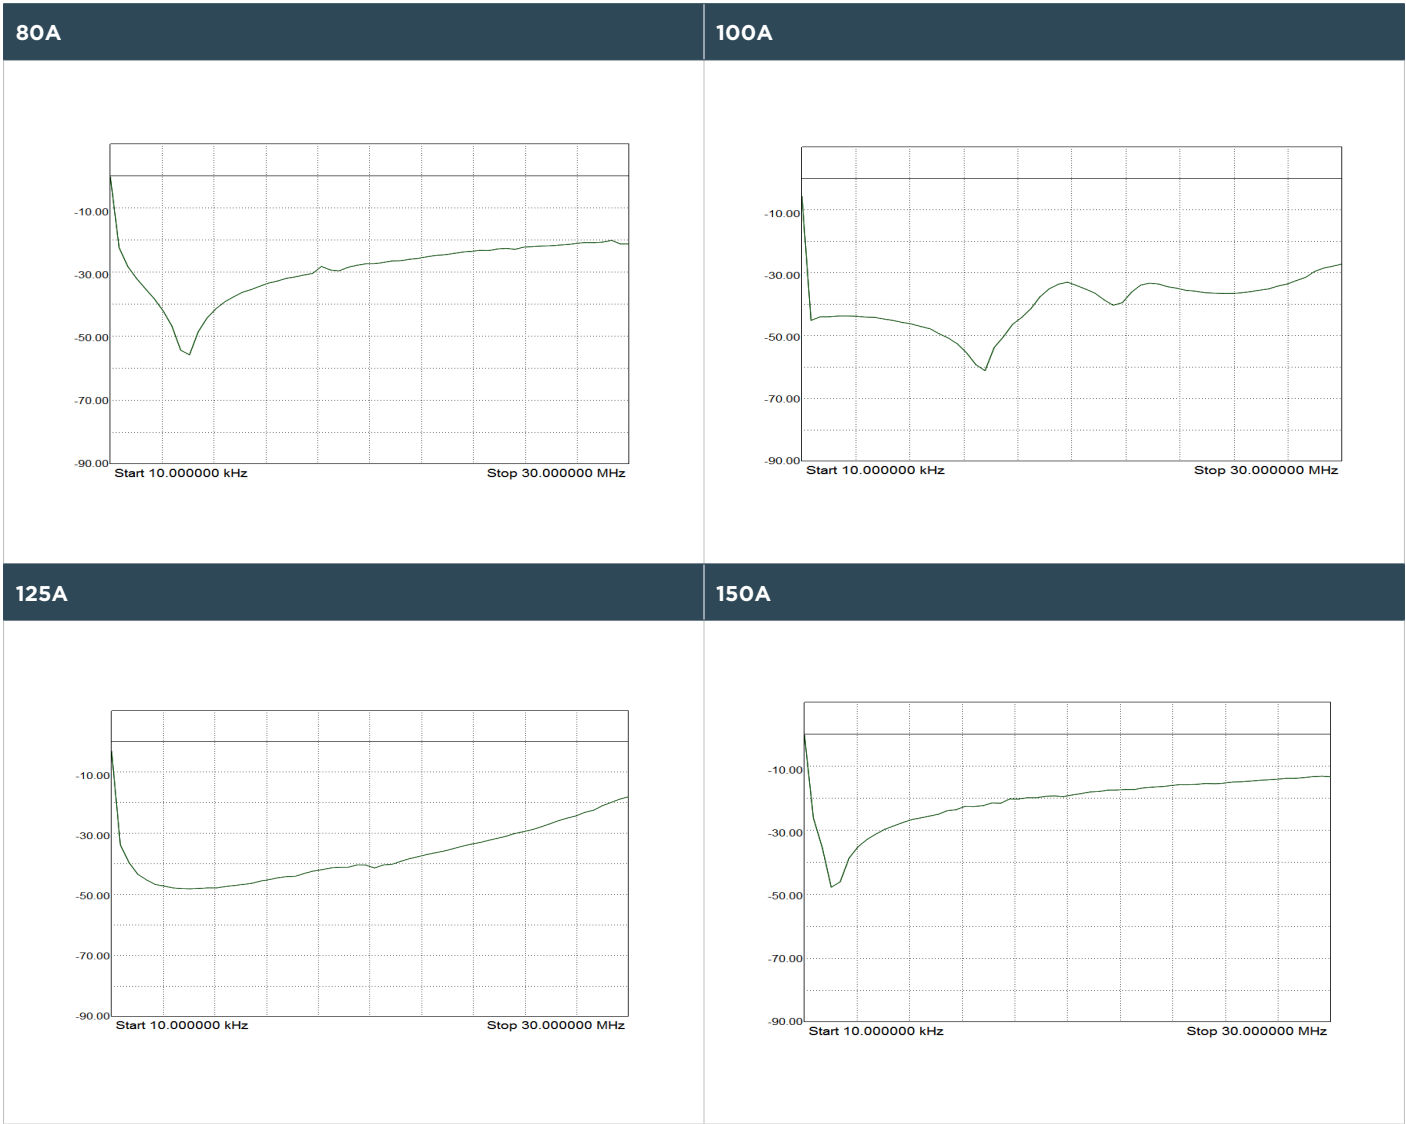

KES Series

Three Phase General Purpose EMI Filter

Case Dimensions – Standard Version

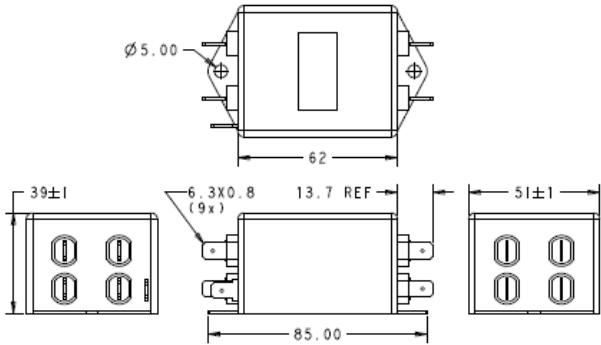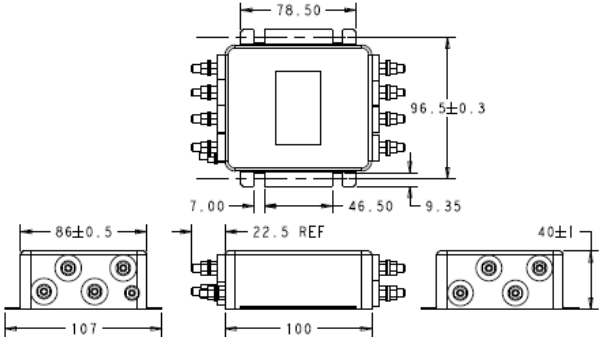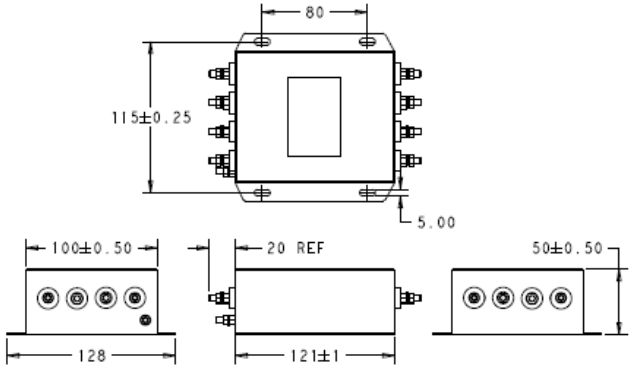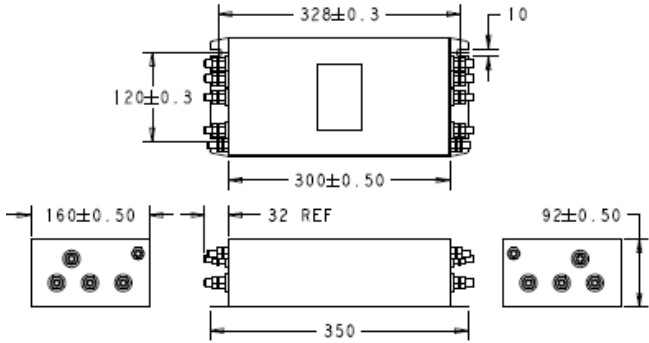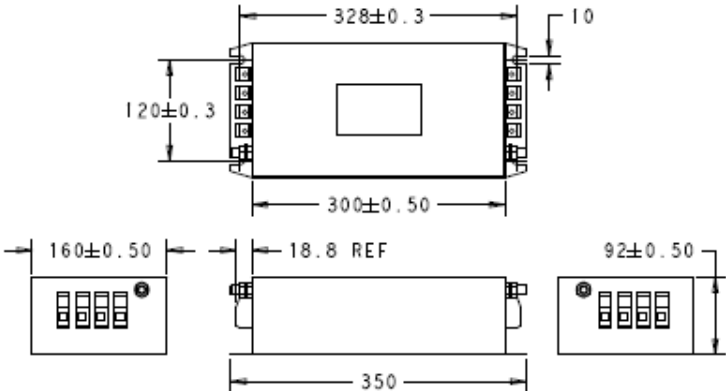1 to 10A Quick Connect (6.35 mm) Types	15A to 40A Nut & Bolt Types
 Technical drawings of 1 to 10A Quick Connect (6.35 mm) types. The top view shows a square case with a central rectangular cutout, a diameter of $\varnothing 5.00$ for the mounting holes, and a width of 62. The side view shows a height of 39 ± 1 and a length of 85.00. The front view shows a width of 51 ± 1 and a height of 13.7 REF. The bottom view shows a width of 62 and a height of 13.7 REF. The mounting holes are spaced 6.3 $\times$ 0.8 (9x).	 Technical drawings of 15A to 40A Nut & Bolt types. The top view shows a square case with a central rectangular cutout, a width of 78.50, and a height of 96.5 ± 0.3. The side view shows a height of 7.00 and a length of 100. The front view shows a width of 86 ± 0.5 and a height of 22.5 REF. The bottom view shows a width of 107 and a height of 40 ± 1. The mounting holes are spaced 46.50 and 9.35.
50A to 60A Nut & Bolt Types	75A to 150A Nut & Bolt Types
 Technical drawings of 50A to 60A Nut & Bolt types. The top view shows a square case with a central rectangular cutout, a width of 80, and a height of 115 ± 0.25. The side view shows a height of 5.00 and a length of 121 ± 1. The front view shows a width of 100 ± 0.50 and a height of 20 REF. The bottom view shows a width of 128 and a height of 50 ± 0.50. The mounting holes are spaced 20 REF.	 Technical drawings of 75A to 150A Nut & Bolt types. The top view shows a square case with a central rectangular cutout, a width of 328 ± 0.3, and a height of 120 ± 0.3. The side view shows a height of 10 and a length of 350. The front view shows a width of 160 ± 0.50 and a height of 32 REF. The bottom view shows a width of 92 ± 0.50 and a height of 32 REF. The mounting holes are spaced 300 ± 0.50 and 32 REF.
75A to 150A Shock Proof Types	
 Technical drawings of 75A to 150A Shock Proof types. The top view shows a square case with a central rectangular cutout, a width of 328 ± 0.3, and a height of 120 ± 0.3. The side view shows a height of 10 and a length of 350. The front view shows a width of 160 ± 0.50 and a height of 18.8 REF. The bottom view shows a width of 92 ± 0.50 and a height of 18.8 REF. The mounting holes are spaced 300 ± 0.50 and 18.8 REF.	


All dimensions in mm; Tolerances according: ISO2768-m

KES Series

Three Phase General Purpose EMI Filter


Case Dimensions - Din Rail Mount

1 to 10A Quick Connect (6.35mm) Types - Dual Mount

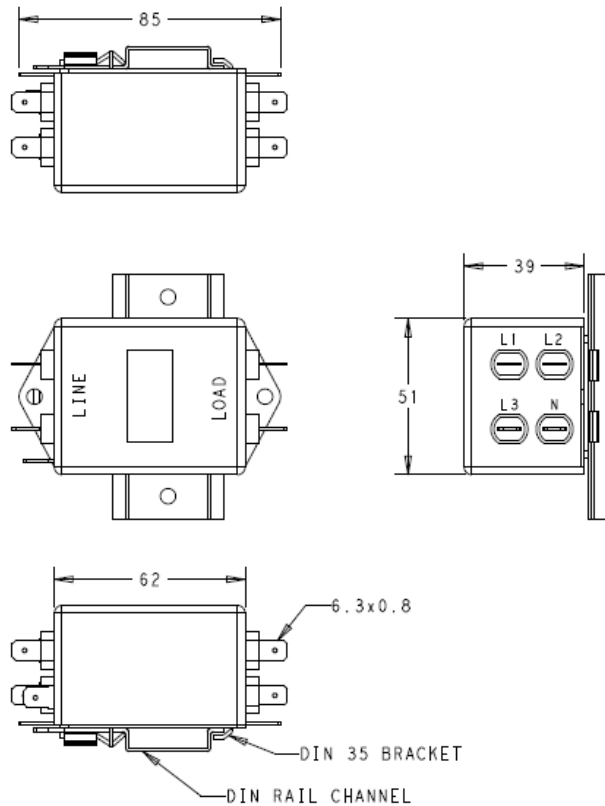

Note: Din Rail not supplied

15A to 40A Nut & Bolt Types - Dual Mount

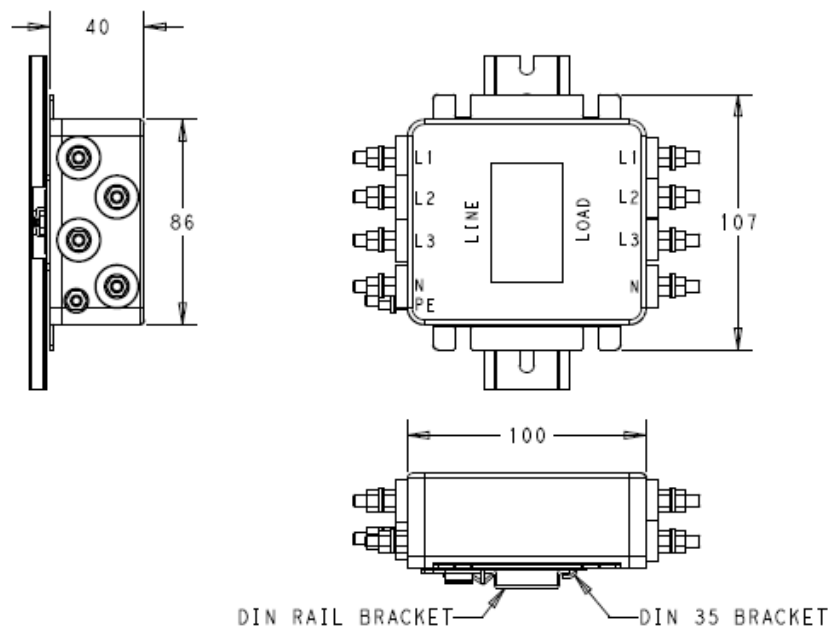

Note: Din Rail not supplied


KES Series

Three Phase General Purpose EMI Filter

Case Dimensions - Din Rail Mount


50A to 60A Nut & Bolt Types - Horizontal Mount

Note: Din Rail not supplied

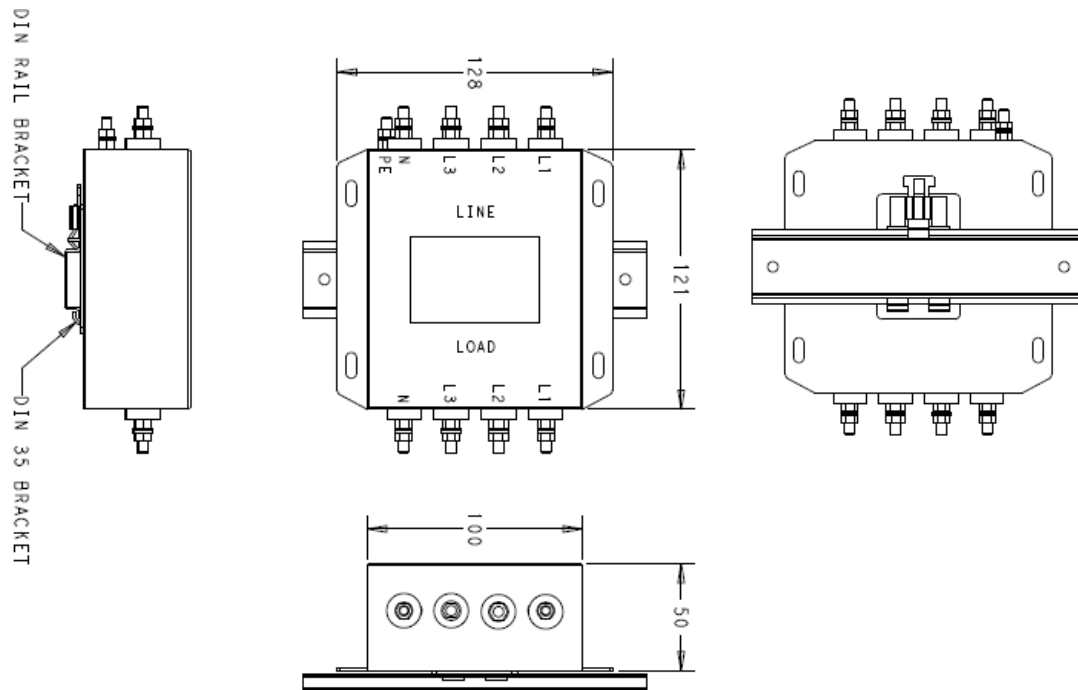


50A to 60A Nut & Bolt Types - Vertical Mount

Note: Din Rail not supplied

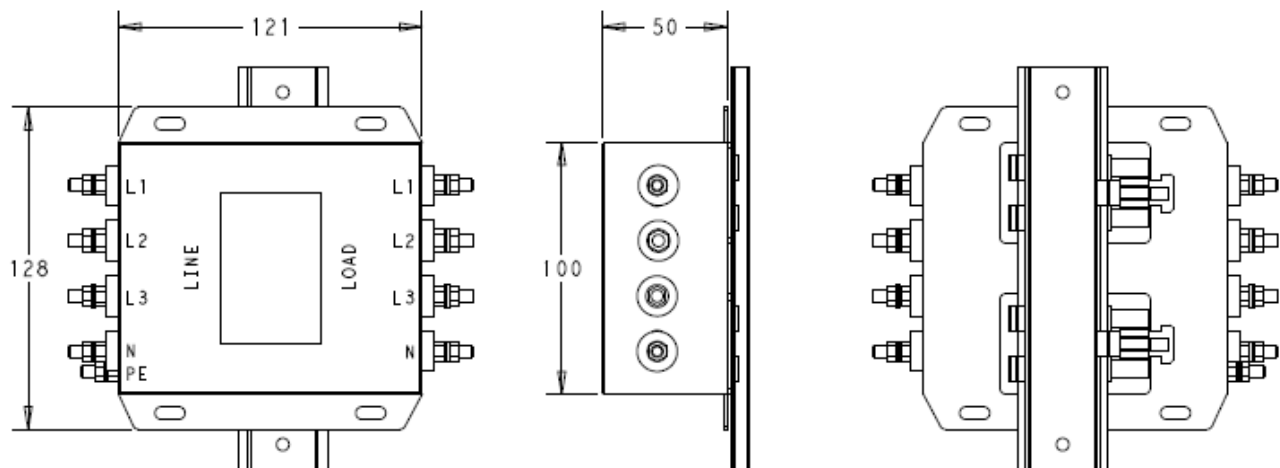

HOW TO ORDER

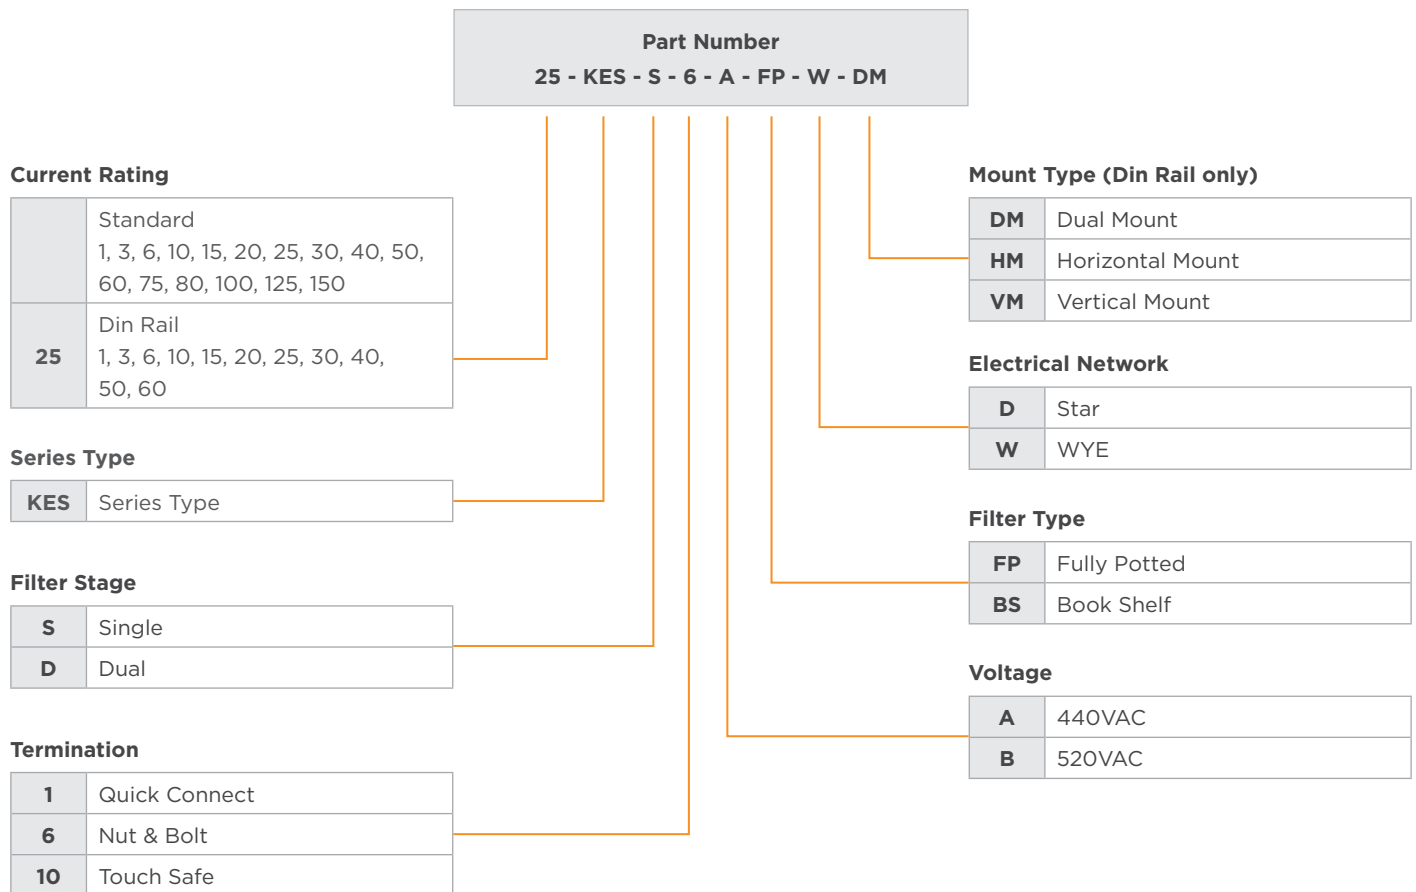

te.com

©2022 TE Connectivity. All Rights Reserved.

TE Connectivity, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.