

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Cable connector, straight, SPEEDCON locking, M17, number of positions: 3+PE, type of contact: Socket, shielded: yes, cable diameter range: 8 mm ... 10 mm, number of positions: 4, connection method: Crimp connection

Your advantages

- ☑ Consistent EMC protection for reliable connection solutions in the industrial environment
- ☑ Crimping connection: vibration- and temperature-resistant assembly
- Flexible use: reliably connect various cable diameters
- Molded designs with pre-assembled cables on one or both sides



Key Commercial Data

| Packing unit | 1 pc |
|--------------|-----------------|
| GTIN | 4 046356 273909 |
| GTIN | 4046356273909 |

Technical data

General

| Note | Order information: Order crimp contacts Ø 2 mm separately |
|--|---|
| Type of locking | SPEEDCON locking |
| Direction of rotation of contact chamber numbering | Standard |
| Coding | N |
| Contact connection method | Crimp connection |
| Type of contacts | Socket |
| Number of positions | 4 |
| Contact diameter of power contacts | 2 mm |
| Rated current for power contacts | 25 A |
| Contact diameter of signal contacts | 2 mm |
| Conductor entry | 8 mm 10 mm |
| Pg housing screw connection | none |



Technical data

Ambient conditions

| Ambient temperature | -40 °C 125 °C |
|----------------------|---------------|
| Degree of protection | IP67 |

Material

| Housing material | Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn) |
|----------------------------|--|
| Insulator material | PA 6.6 |
| Gasket and O-ring material | FPM |

Specifications according to DIN EN 61984:2001

| Installation height max. | 3000 m |
|---|--------|
| Nominal / operating voltage of power contacts | 630 V |
| Rated surge voltage of power contacts | 6 kV |
| Overvoltage category of power contacts | III |
| Degree of pollution of power contacts | 3 |

Standards and Regulations

| otarida do aria regulationo | |
|-----------------------------|--|
| Safety note | WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property. |
| | WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible. |
| | WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product. |
| | The products are suitable for applications in plant, controller, and electrical device engineering. |
| | When operating the connectors in outdoor applications, they must be separately protected against environmental influences. |
| | Assembled products may not be manipulated or improperly opened. |
| | Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products). |
| | When using the product in direct connection with third-party manufacturers, the user is responsible. |
| | For operating voltages > 50 V AC, conductive connector housings must be grounded |
| | Ensure that the protective or functional ground has been properly connected. |
| | VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector |
| | Only use tools recommended by Phoenix Contact |
| | The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product. |
| | Operate the connector only when it is fully plugged in and interlocked. |
| | |



Technical data

Standards and Regulations

| Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards. |
|--|
| Observe the minimum bending radius of the cable. Lay the cable without twisting it. |
| • The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12). |


Environmental Product Compliance

| REACh SVHC | Lead 7439-92-1 |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 50 years |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings



Schematic diagram

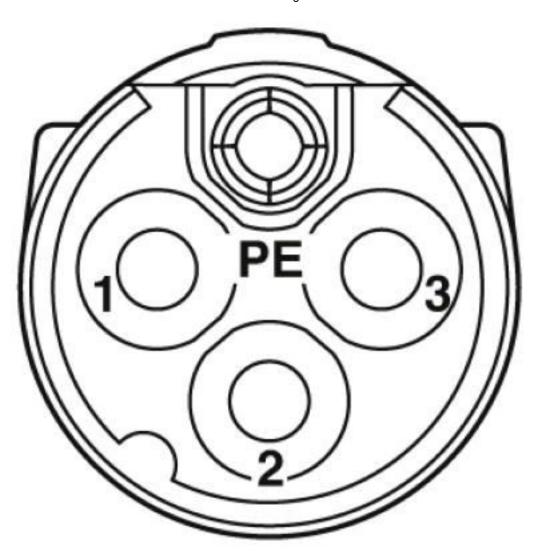

Connector pin assignment




Diagram

35
30
25
20
15
10
5
0 10 20 30 40 50 60 70 80 90 100 110 120 130

⊕ [°C]

I = current strength, ϑ = ambient temperature, 3x 25 A

Dimensional drawing

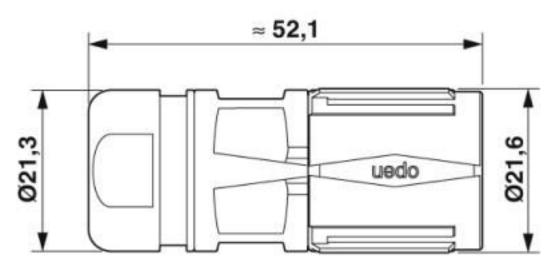

Classifications

eCl@ss

| eCl@ss 10.0.1 | 27440102 |
|---------------|----------|
| eCl@ss 4.0 | 27260700 |
| eCl@ss 4.1 | 27260700 |
| eCl@ss 5.0 | 27260700 |
| eCl@ss 5.1 | 27260700 |
| eCl@ss 6.0 | 27260700 |



Classifications

eCl@ss

| eCl@ss 7.0 | 27440102 |
|------------|----------|
| eCl@ss 8.0 | 27440102 |
| eCl@ss 9.0 | 27440102 |

ETIM

| ETIM 3.0 | EC001121 |
|----------|----------|
| ETIM 4.0 | EC001121 |
| ETIM 5.0 | EC002635 |
| ETIM 6.0 | EC002061 |

UNSPSC

| UNSPSC 6.01 | 43172015 |
|---------------|----------|
| UNSPSC 7.0901 | 43201404 |
| UNSPSC 11 | 43172015 |
| UNSPSC 12.01 | 43201404 |
| UNSPSC 13.2 | 39121413 |
| UNSPSC 18.0 | 39121413 |
| UNSPSC 19.0 | 39121413 |
| UNSPSC 20.0 | 39121413 |
| UNSPSC 21.0 | 39121413 |

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

Approval details

| UL Recognized | <i>7</i> .1 | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE | | FILE E 335019 |
|--------------------|-------------|--|-------|---------------|
| | | | | |
| Nominal voltage UN | | | 600 V | |
| Nominal current IN | | | 15 A | |
| mm²/AWG/kcmil | | | 14 | |



Approvals

| cUL Recognized | . 7 \ | http://database.ul.cor | m/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 335019 |
|--------------------|--------------|------------------------|--|---------------|
| | | | | |
| Nominal voltage UN | | | 600 V | |
| Nominal current IN | | | 15 A | |
| mm²/AWG/kcmil | | | 14 | |

| | EAC | EAC | B.01687 |
|--|-----|-----|---------|
|--|-----|-----|---------|

cULus Recognized

Accessories

Accessories

Crimp contact

Crimp contact - ST-20KS010 - 1607657



Crimp contact, turned, contact diameter: 2 mm, crimp range: 0.25 mm² ... 1 mm²

Crimp contact - ST-20KS020 - 1607658



Crimp contact, turned, Single contact, contact diameter: 2 mm, crimp range: 1 mm 2 ... 2.5 mm 2

Mounting material

Color-coding - ST-Z0016 - 1617993



Color-coding, color: green



Accessories

Color-coding - ST-Z0017 - 1618049



Color-coding, color: orange

Color-coding - ST-Z0018 - 1618050



Color-coding, color: black

Square mounting flange with O-ring - ST-Z0002 - 1607771



Square mounting flange with O-ring, Axial O-ring, 4x Ø2,7

Square mounting flange with O-ring - ST-Z0003 - 1607772



Square mounting flange with O-ring, Axial O-ring, 4xM3

Square mounting flange - ST-Z0004 - 1607773



Square mounting flange, 4x Ø2,7



Accessories

Square mounting flange - ST-Z0005 - 1607775



Square mounting flange, 4xM3

Protective cover

Protective cap - ST-Z0007 - 1607777



Plastic protection cap for connectors with M17 knurled nut and M17 SPEEDCON knurled nut

Phoenix Contact 2020 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany Tel. +49 5235 300

Fax +49 5235 3 41200

http://www.phoenixcontact.com