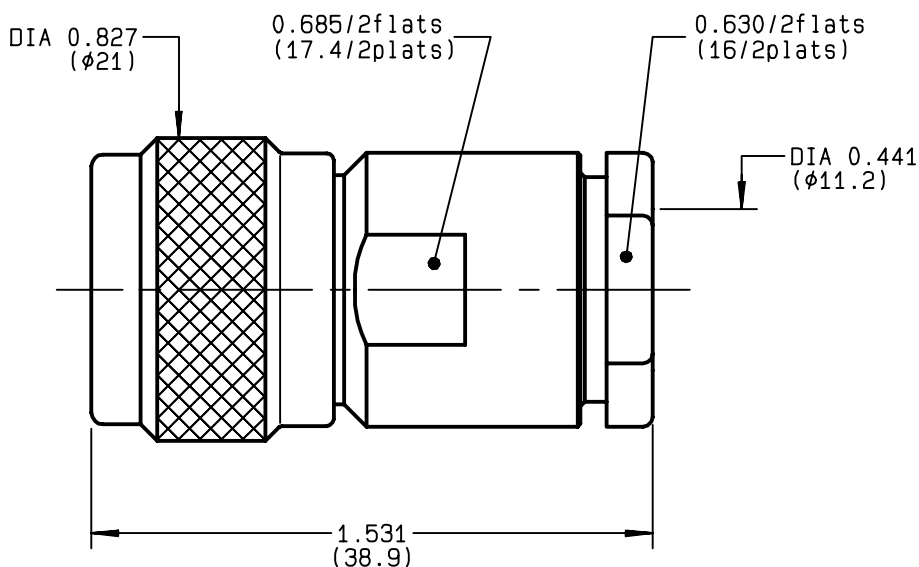


STRAIGHT PLUG CLAMP TYPE
CABLE 10+11/50+75 S+D
R161.022.000
SERIES N


NOMINAL IMPEDANCE	50	Ω
FREQUENCY RANGE	0-11	GHz
TEMPERATURE RATING	-55/+155	$^{\circ}\text{C}$
V.S.W.R	1.30 +	x F(GHz)Maxi
RF INSERTION LOSS	0.048	$\sqrt{F}(\text{GHz})$ dB Maxi
VOLTAGE RATING	1400	Veff Maxi
DIELECTRIC WITHSTANDING VOLTAGE	2500	Veff Mini
INSULATION RESISTANCE	5000	M Ω Mini
HERMETIC SEAL	NA	Atm.cm ³ /s
LEAKAGE (pressurized only)	NA	
MECHANICAL DURABILITY	500	Cycles
WEIGHT	49.7	gr
SPECIFICATION		

CABLES : **KX 4**
KX 8
RG 11
RG 144
RG 165
RG 213
RG 214
RG 216
RG 225
RG 393

OTHERS CHARACTERISTICS

CABLE RETENTION	300	N Mini
CENTER CONTACT RETENTION		
Axial force - mating end	68	N Mini
Axial force - opposite end	68	N Mini
Torque	NA	cm.N Mini
RECOMMENDED TORQUES		
Mating	130	cm.N
Panel nut	NA	cm.N
Clamp nut	800	cm.N

CONNECTOR PARTS	MATERIALS	FINISH	(all values are given) in micrometers
BODY	BRASS	BBR 2	
OUTER CONTACT	BRASS	BBR 2	
CENTER CONTACT	BRASS	GOLD 0.5 OVER NICKEL 2	
INSULATOR	PTFE	-	
GASKET	SILICONE RUBBER	-	
OTHERS PIECES	BRASS	BBR 2	

BONOMINI

ISSUE
9809C02
CREATION DATE
03/11/1992
FILE PART-NUMBER
EPC 96-07


RADIALL®

The information given here is subject to change without notice.
 Design changes may be in order to improve the product .

Connect to the future




R161.022.000
 ISSUE 9809C02 SERIES N

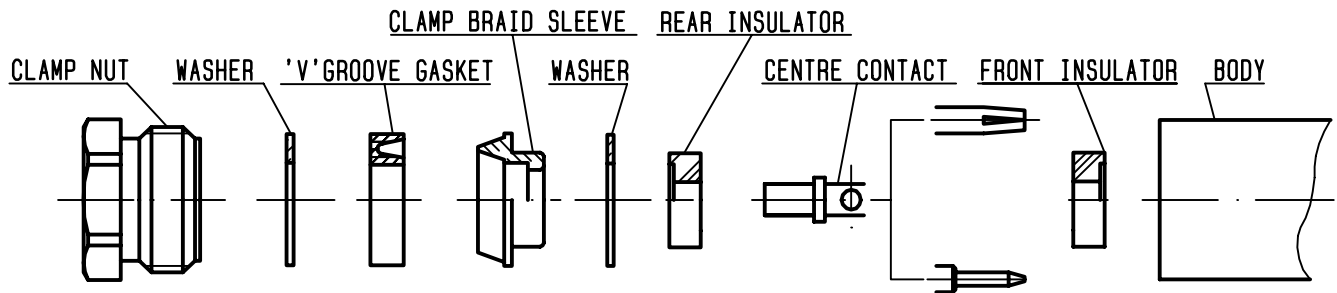

①

Strip the cable .

-
-
-
-




Stripping	a	b	c	d	e
inch	0.197	0.335	0	0	0.059
mm	5	8.5			1.5

②

Slide the clamp nut , the washer and the 'V' groove gasket onto the cable .
 Slide clamp braid sleeve over braid .
 Fold back braid and trim off surplus braid .
 Trim back dielectric as shown .


-
-

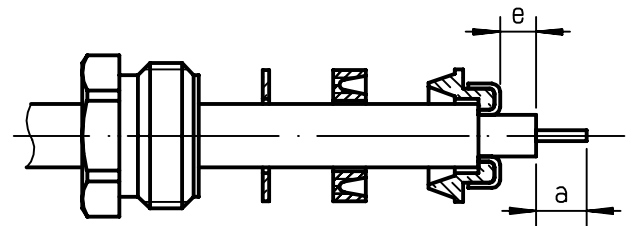

③

Mount washer and rear insulator .
 Solder the cable inner conductor into centre contact .

-
-
-
-

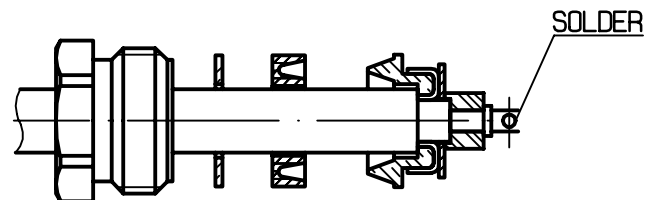

④

Mount front insulator .
 Screw sub-assembly into the connector body .
 (recommended coupling torque 70.87 in.lb)

-

