DC/DC Converters

K78MXX-2000R3





equipment











current limiting
















Feature

DC-DC converters Ideal for semiconductor, analytical, medical, and detector applications Accuracy, reliability and stability are critical for high voltage DC-DC applications. manufacturers, with over 20 years of experience providing accurate and reliable compact solutions. applications - allowing us to maximize functionality in a compact environment

Safety agency approval

ENI 55032:2015/A1:2020 EN IEC 62368-1:2020+A11:2020 IEC 62321-1:2013IEC 62321-2:2021IEC 62321-3-1:2013,

Up to 5-year warranty (Refer to Instruction Manual)

CE FCC marking

Low Voltage Directive **RoHS Directive**

ROHS REACH marking

Electrical Equipment Safety Regulations RoHS Regulations

EMI

- · PCA300F, PCA600F
- Complies with FCC-B, CISPR32-B, EN55011-B, EN55032-B, VCCI-B
- · PCA1000F. PCA1500F Complies with FCC-A, CISPR32-A, EN55011-A, EN55032-A, VCCI-A
- **EMS Compliance**: EN61204-3, EN61000-6-2 IEC60601-1-2 (2014), EN60601-1-2 (2015)

EN61000-4-2

EN61000-4-3

EN61000-4-4

EN61000-4-5

EN61000-4-6

EN61000-4-8

EN61000-4-11

K78MXX-2000R3



Features

- Efficiency up to 97%, no heatsinks required
- Pin-out compatible with LM78XX linears
- Low profile (L/W/H=11.6 x 10.15 x 7.6mm)
- Short circuit protection, thermal shutdown
- Operating ambient temperature range: -40°Cto +85°C

Description

The K78XXM-1000R3-Series are high efficiency switching regulators and ideal substitutes for LM78xx series three-terminal linear regulators. The converters feature high efficiency, low loss, short circuit protection, and there is no need for a heat sink.

These products are widely used in applications such as industrial control, instrumentation and electric power.

Technical Specification All specifications are typical at nominal input, full load and 25°C unless otherwise stated.


Model	Input Voltage Range	Output Voltage (V)	Output Current (mA)		Full Load	Capacitive
Number			Min. Load (1)	Full. Load	Efficiency(%) Typ. Vin Min./ Vin Max.	Load(uF) Max.
K7803M-1000 R3	4.75-36V ^(*1) Nominal: 24V	3.3	0	1000	94/84	1000
K7805M-1000 R3	6.5-36V Nominal: 24V	5	0	1000	96/88	1000
K7812M-1000 R3	15-36V Nominal: 24V	12	0	1000	97/93	330
K7815M-1000 R3	18-36V Nominal: 24V	15	0	1000	97/94	330


K78MXX-2000R3



Input Specifications		
Input Specifications		4.75V Min.
Input voltage	24V nominal input	36V max.
Input filter		Capacitor
Input Reverse Polarity	See Positive to Negative Converter,	
No Load Input Current		30mA max.
Hot swap is not supported		
Environmental Specifications		
Operating ambient temperature	with derating	-40°C to +85°C
Storage temperature range		-55°C to +125°C
Maximum case temperature		+100°C
Operating humidity	Non-condensing	95% RH max.
Temperature coefficient		±0.015% / °C Typ.
RoHS Compliant		RoHS 2.0
Output Specifications		
Voltage accuracy	At 100% load	±2.0% Typ ±4.0% max.
Line regulation	Vin=min. to max. Vout=100% load	±0.2% Typ ±0.4% max.
Load Regulation	Vin=nom. Vout=10 -100% load	±0.4% Typ ±0.8% max.
Ripple and Noise (20MHz Bandwidth) ⁽⁴⁾	Vin=nom. Vout=100% load	50mVp-p Typ. 100mVp-p max.
Over Current Protection(OCP)	100%=1.0A	300~500%
Short Circuit Protection (SCP)		Continuous, autorecovery
General Specifications		
Efficiency		See table
Switching frequency	Pulse width modulation(PWM), Vin=nom.	410KHz
Dynamic load response	75-100-75% load step	<250uS Typ
MTBF	According to MIL-HDBK-217F,G.B. +25°C	2.0×10 ⁷ Hrs
Safety ⁽⁵⁾	IEC/EN60950-1,2nd Edition,EN55032	meet
Physical Specifications		
Dimensions		$0.45 \times 0.41 \times 0.3$ Inch (11.6 × 10.4 × 7.6 mm)
Weight		2.0g (0.07oz) typ.
EMC Compliance	Condition	Standard/Criterion
Electromagnetic compatibility of multimedia equipment-Emission requirements	with external components	EN55032,Class A EN55032,Class B
ESD Electrostatic discharge immunity test	Air ±8kV,Contact ±4kV	EN61000-4-2,Criteria B
Radiated,radio-frequency,electromagnetic field immunity test	10V/m	EN61000-4-3,Criteria A



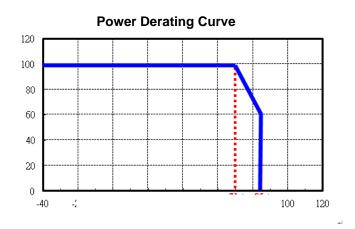





Note


Ambient Temperature ($^{\circ}$ C)

- 1. lo below this value will not damage these converters, however, they may not meet all listed specifications.
- 2. Typical value, tested at nominal input and full load.
- 3. Operation under no load will not harm the converter, but specifications may not be met A minimum load of 10mA is recommended
- 4. With light loads at or below 10%, Ripple & Noise for 3.3V/5V output parts increases to 150mVp-p max, and for Other output parts to 2%Vo max.
- 5. Input Back Ripple Current is tested and specified over a 5 Hz to 20 MHz bandwidth.
 Input filtering is Cin=100 uF*2, Cbus=1000 uF, Lbus=1 uH. All caps are low ESR.(see page 6 EMI Filter)

Mechanical Dimensions







Pin Assignment				
Pin	Define			
1	Vin			
2	GND			
3	Vout			


Unit: mm

Tolerance: XX.X=±0.5, XX.XX=±0.25



Test Configurations


All specifications are typical at nominal input, full load and 25°C unless otherwise stated.

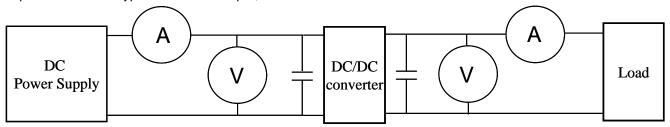


- ©DC Power Supply: It offers a wide voltage and current range precisely.
- ©Current meter (A): Accuracy→ 200μA ~ 200mA 4 ranges+(0.2% rdg + 2 digits)

2000mA ~ 20A 2 ranges+(0.3% rdg + 2 digits).

- \bigcirc Voltage meter (V): Accuracy → \pm (0.03% rdg + 4 digits).
- OLoad: At full load.
- Wires: The resistance of the wires must be small.
 - 1. Ripple and Noise: as shown below. The bandwidth is 0-20MHz.

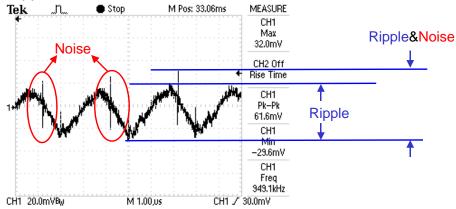


Output Ripple&Noise measurement test circuit: as shown below.



Co: usually 10uF to 47uF use low-ESR ceramic.

2. Application circuit: as shown below. C1=22uF/50V, C2 =47uF/16V Low ESR.

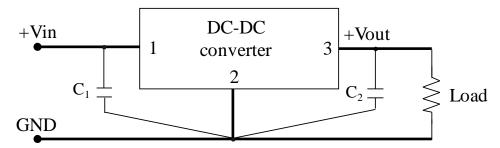

K78MXX-2000R3




EMI Filter

Input filter components are used to meet emissions requirement for the module.


These components should be mounted as close as possible to the module; and all leads should be minimized to decrease noise.

decrease noise.

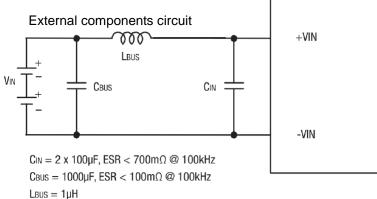

CIN = 2x100 uF, ESR<700m Ω @ 100kHz CBUS =1000 uF, ESR<100m Ω @ 100kHz CBUS =1uF

Positive to Negative Converter

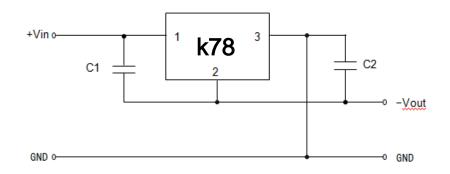

C1 and C2 are required and should be fitted close to the converter pins.

Maximom capacitive load including C2 is 100uF