




TAOGLAS®

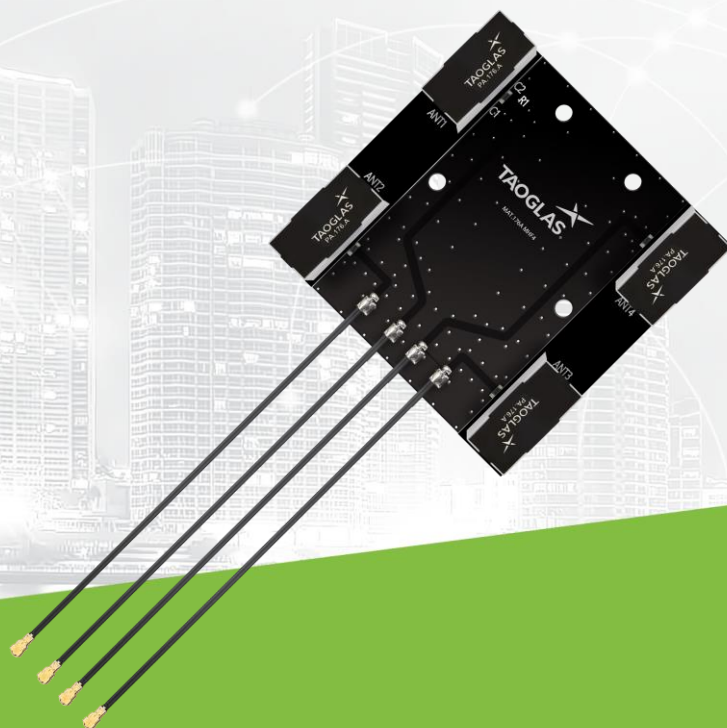

Datasheet

High-band 5G 4x4 MIMO Antenna Board

Part No:
MAT.176A

Description:

High-Band 5G Antenna Board (60x60mm) with 4x4 MIMO operation

Features:

Covering 1.7 - 6GHz

Antenna Board with 4x4 MIMO

High Efficiency across all cellular High-Bands

Dimensions: 60 x 60mm

Manufactured in our IATF16949 Certified Facility

Cables: 100mm of 1.13

Connectors: I-PEX MHF4L

CE Certified, RoHS & REACH Compliant



1. Introduction	3
2. Specifications	4
3. Antenna Characteristics	7
4. Radiation Patterns	9
5. Mechanical Drawing	38
6. Packaging	39
Changelog	40

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



The MAT.176A is a patent-pending, 5G/4G high-band cellular antenna board. The MAT.176A has been designed with 4 PA.176 antennas integrated on to one small antenna board – just 60*60mm. The MAT.176A is used for applications that require 4 high performing MIMO antennas on one board. It provides very high efficiency and gain across multiple cellular bands, operating between 1.7 - 6GHz. The MAT.176A has been designed to be used in conjunction with the next generation of 5G MIMO modules and routers.

Typical cellular applications include:

- Telematic Control and On-board Diagnostic Units
- First Responder and Public Safety Devices
- UAV's and Robotics
- Media and Smart Home

The MAT.176A is manufactured in Taoglas' IATF16949 Certified Facility and is suitable for automotive applications.

Taoglas provides optimization services for matching, and active TRP, TIS and RSE testing. The cable lengths and connectors are fully customizable subject to MOQ and NRE, for further information please contact your regional Taoglas customer support team.

2. Specifications

Electrical

Band	Frequency (MHz)		Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	VSWR	Impedance	Polarization	Radiation Pattern
4G/3G Band 3,4,9,25,35,66	1710~1880	MIMO 1	72.2	-1.41	5.14	<3:1	50 Ω	Linear	Omni
		MIMO 2	81.1	-0.91	5.62				
		MIMO 3	81.0	-0.91	6.37				
		MIMO 4	73.7	-1.32	4.77				
4G/3G Band 1,2,3,9,25,35,39	1850~1990	MIMO 1	66.5	-1.77	5.14				
		MIMO 2	71.6	-1.45	5.61				
		MIMO 3	71.5	-1.46	6.30				
		MIMO 4	67.5	-1.71	4.86				
4G/3G Band 1,2,4,23,25	1920~2170	MIMO 1	53.9	-2.68	4.32				
		MIMO 2	63.0	-2.01	5.67				
		MIMO 3	61.3	-2.12	5.89				
		MIMO 4	55.2	-2.58	4.27				
4G/3G Band 7,30,38,40,41	2300~2690	MIMO 1	48.3	-3.16	4.37				
		MIMO 2	49.7	-3.04	5.24				
		MIMO 3	50.4	-2.97	5.29				
		MIMO 4	49.8	-3.03	4.87				
5G/4G Band 22,42,78	3300~3500	MIMO 1	46.9	-3.29	3.12				
		MIMO 2	46.9	-3.29	3.59				
		MIMO 3	49.4	-3.06	3.44				
		MIMO 4	45.9	-3.38	2.99				
5G/4G Band 22,42,43,48,77,78,79	3200~4650	MIMO 1	50.9	-2.93	4.58				
		MIMO 2	54.2	-2.66	3.91				
		MIMO 3	55.6	-2.55	5.79				
		MIMO 4	50.1	-3.00	4.06				
Greater than 5GHz	5150~5925	MIMO 1	36.6	-4.36	6.13				
		MIMO 2	41.5	-3.82	4.91				
		MIMO 3	43.5	-3.61	4.50				
		MIMO 4	37.4	-4.27	6.34				


Mechanical	
Dimension	60*60 mm
Antenna Material	Ceramic
Board Material	FR4
Connector	I-PEX MHF 4L
Cable	100mm of 1.13
Environmental	
Temperature Range	-40°C to 85°C
Moisture Sensitivity	Level 3

5G/4G Bands			
Band Number	5G NR / FR1 / LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA		
	Uplink	Downlink	Covered
1	UL: 1920 to 1980	DL: 2110 to 2170	✓
2	UL: 1850 to 1910	DL: 1930 to 1990	✓
3	UL: 1710 to 1785	DL: 1805 to 1880	✓
4	UL: 1710 to 1755	DL: 2110 to 2155	✓
5	UL: 824 to 849	DL: 869 to 894	✗
7	UL: 2500 to 2570	DL: 2620 to 2690	✓
8	UL: 880 to 915	DL: 925 to 960	✗
9	UL: 1749.9 to 1784.9	DL: 1844.9 to 1879.9	✓
11	UL: 1427.9 to 1447.9	DL: 1475.9 to 1495.9	✓
12	UL: 699 to 716	DL: 729 to 746	✗
13	UL: 777 to 787	DL: 746 to 756	✗
14	UL: 788 to 798	DL: 758 to 768	✗
17	UL: 704 to 716	DL: 734 to 746	✗
18	UL: 815 to 830	DL: 860 to 875	✗
19	UL: 830 to 845	DL: 875 to 890	✗
20	UL: 832 to 862	DL: 791 to 821	✗
21	UL: 1447.9 to 1462.9	DL: 1495.9 to 1510.9	✓
22	UL: 3410 to 3490	DL: 3510 to 3590	✓
23	UL: 2000 to 2020	DL: 2180 to 2200	✓
24	UL: 1625.5 to 1660.5	DL: 1525 to 1559	✓
25	UL: 1850 to 1915	DL: 1930 to 1995	✓
26	UL: 814 to 849	DL: 859 to 894	✗
27	UL: 807 to 824	DL: 852 to 869	✗
28	UL: 703 to 748	DL: 758 to 803	✗
29	UL: -	DL: 717 to 728	✗
30	UL: 2305 to 2315	DL: 2350 to 2360	✓
31	UL: 452.5 to 457.5	DL: 462.5 to 467.5	✗
32	UL: -	DL: 1452 - 1496	✓
35		1850 to 1910	✓
38		2570 to 2620	✓
39		1880 to 1920	✓
40		2300 to 2400	✓
41		2496 to 2690	✓
42		3400 to 3600	✓
43		3600 to 3800	✓
48		3550 to 3700	✓
66	UL: 1710-1780	DL: 2110-2200	✓
71		617 to 698	✗
74/75/76		1427 to 1518	✗
77		3300 to 4200	✓
78		3300 to 3800	✓
79		4400 to 5000	✓
126		410 to 430	✗


*Covered bands represent those with greater than 20% efficiency

3. Antenna Characteristics


3.1 Return Loss

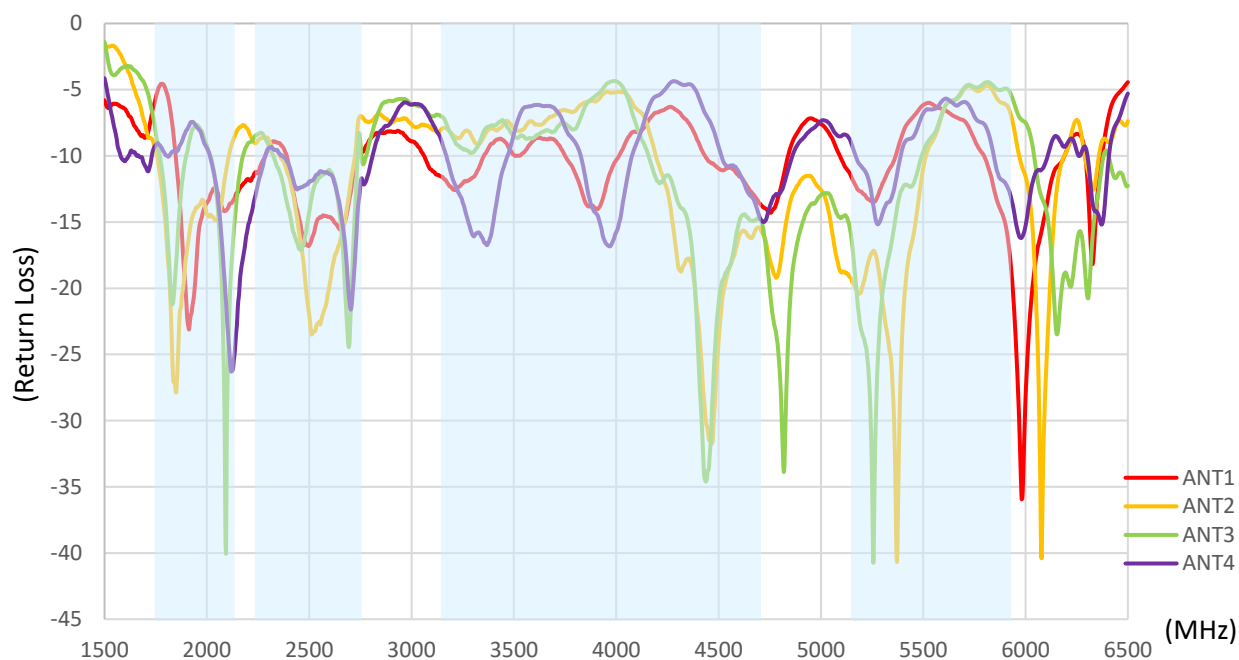


3.2 Efficiency

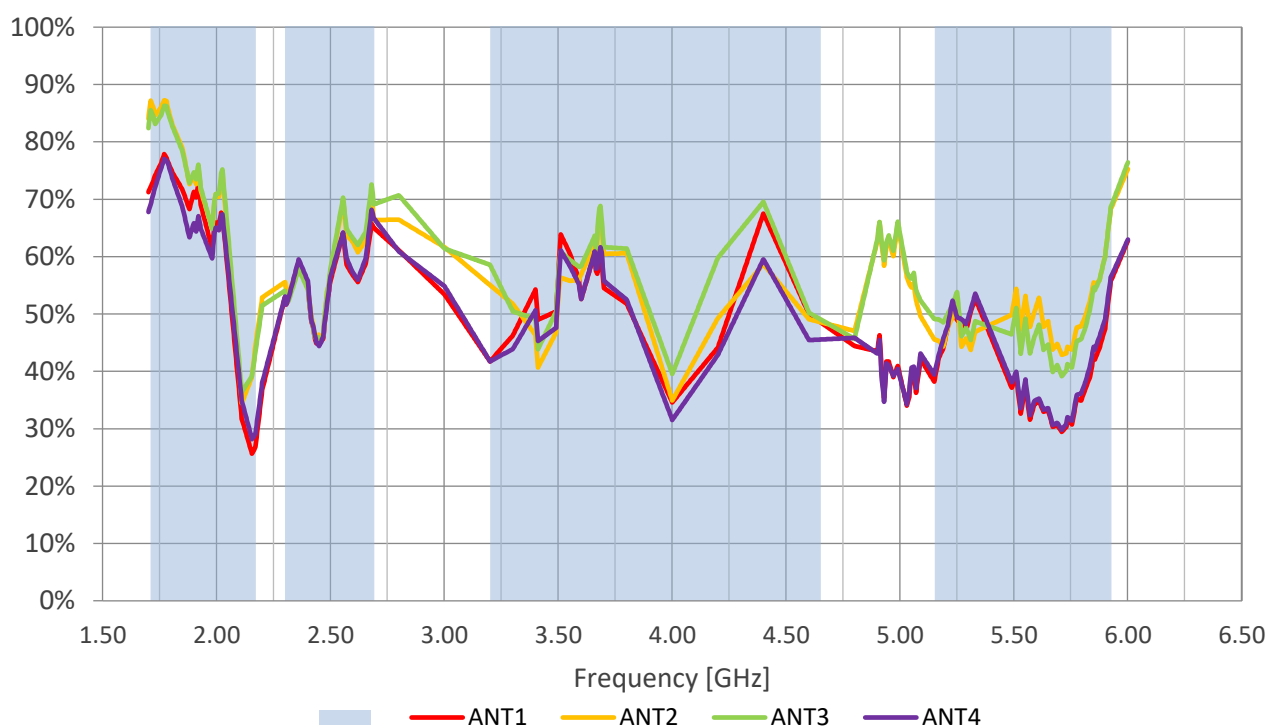

3.3 Average Gain

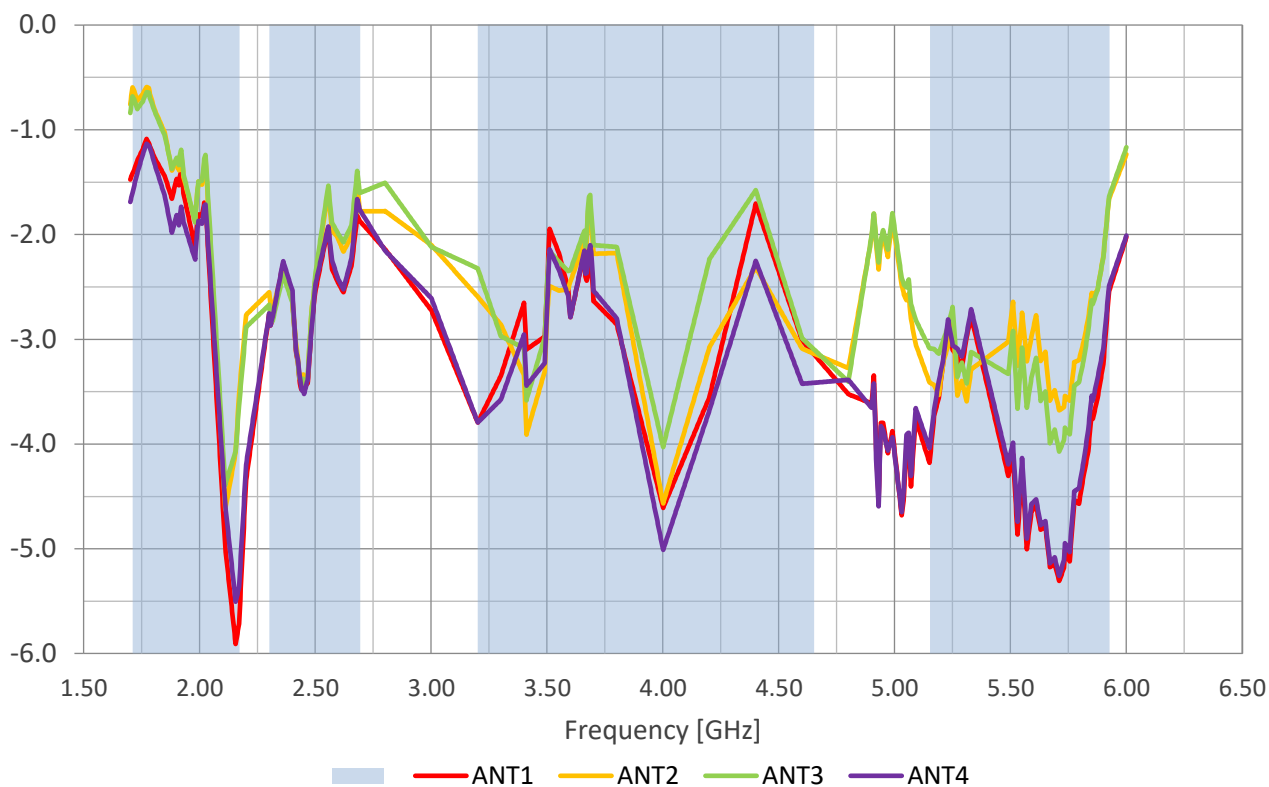

3.4 Peak Gain

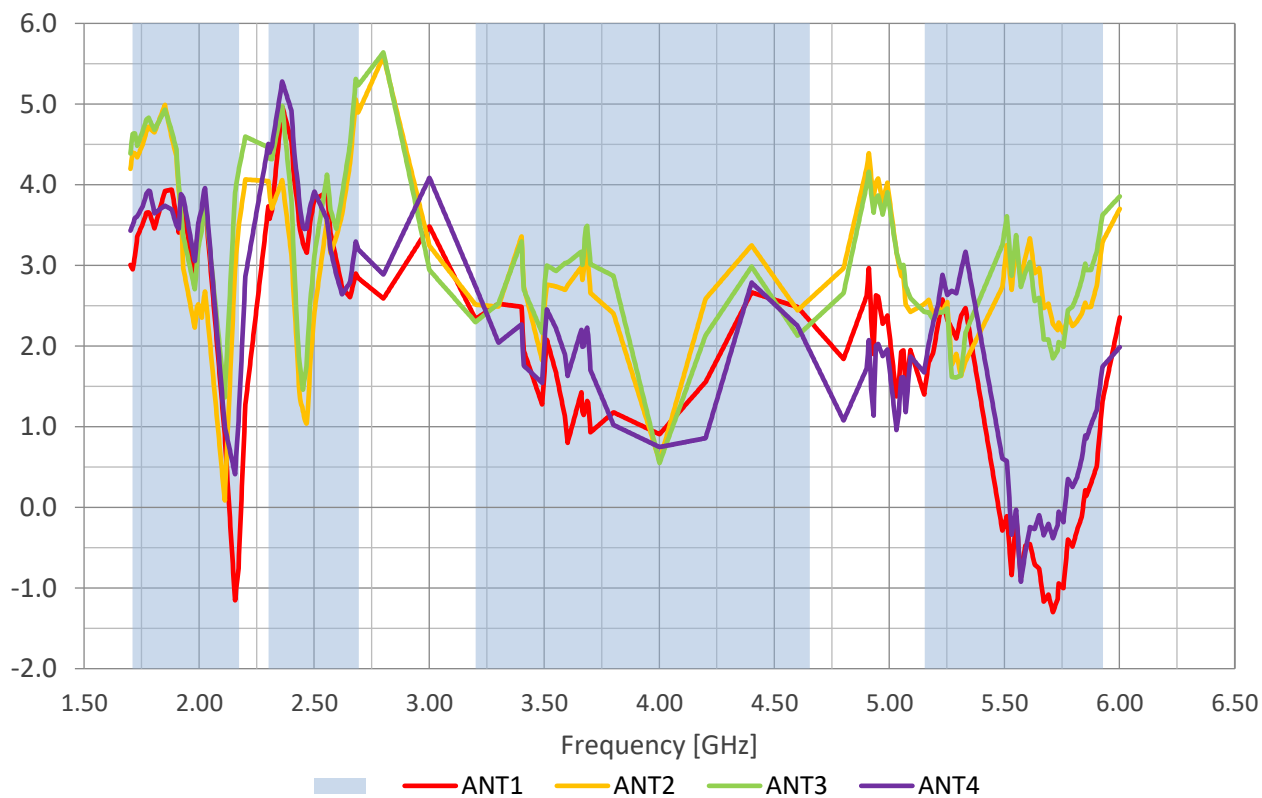


4. Radiation Patterns

4.1 Test Setup




4.2 3D and 2D Radiation Patterns – MIMO 1


1785MHz

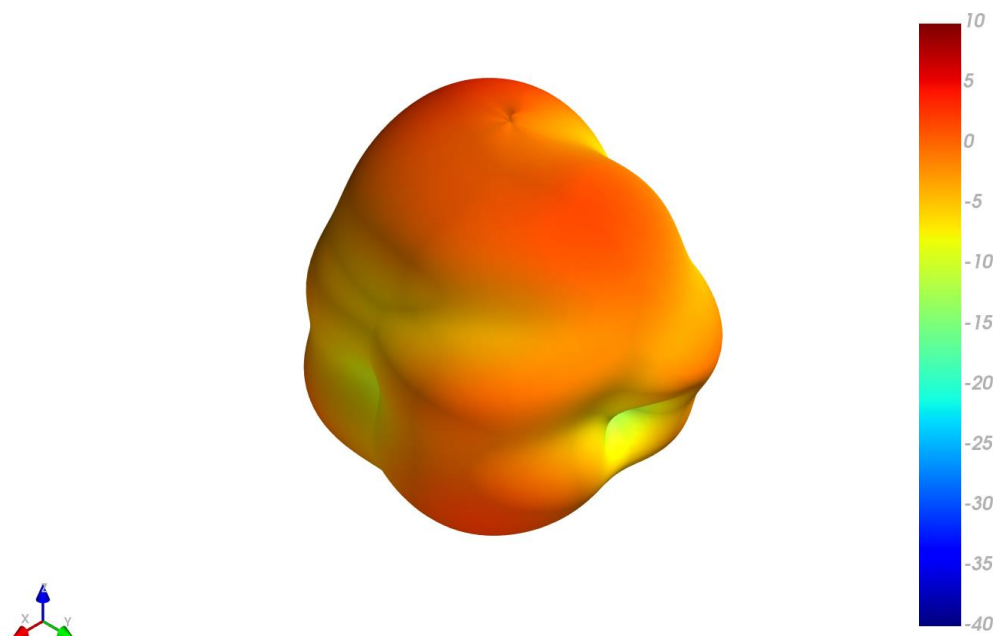


XY Plane

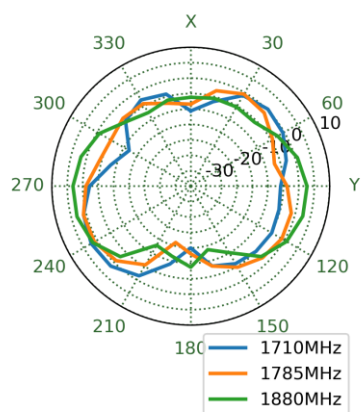


XZ Plane

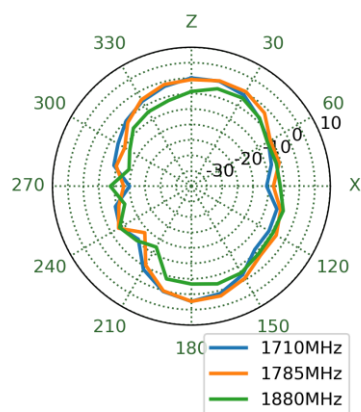


YZ Plane

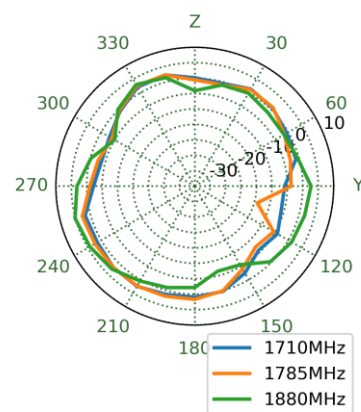


1920MHz

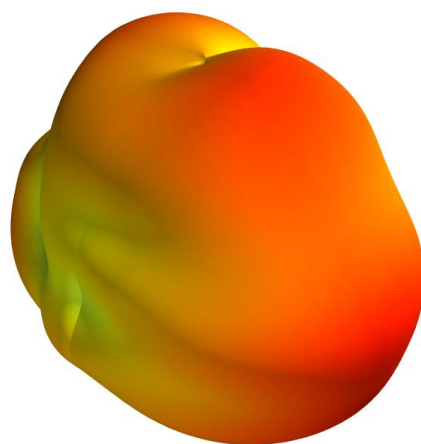


XY Plane

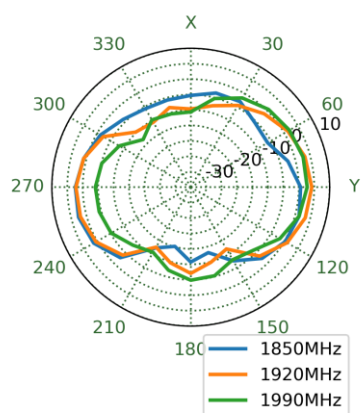


XZ Plane

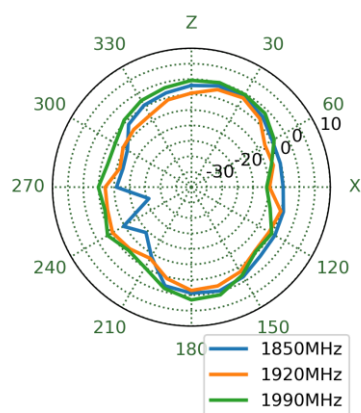


YZ Plane

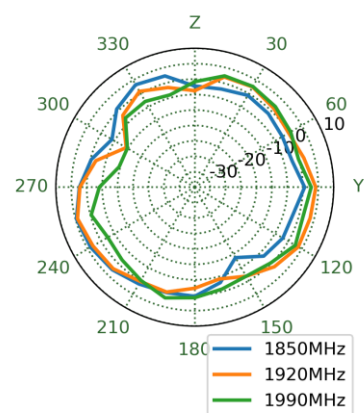


2025MHz

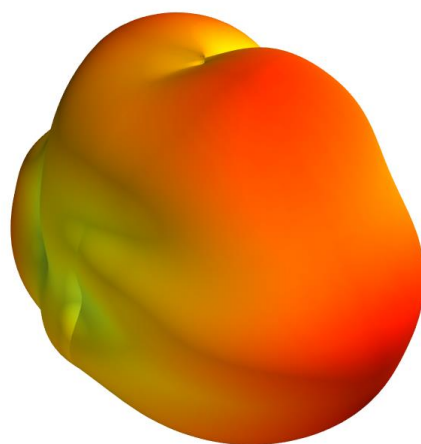


XY Plane

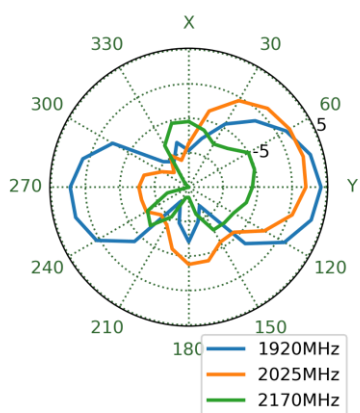


XZ Plane

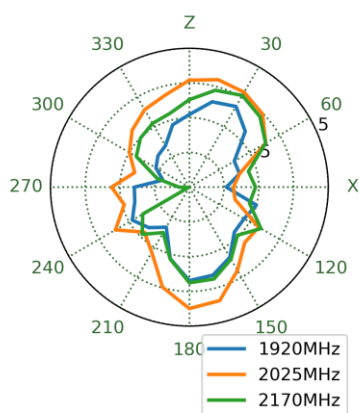


YZ Plane

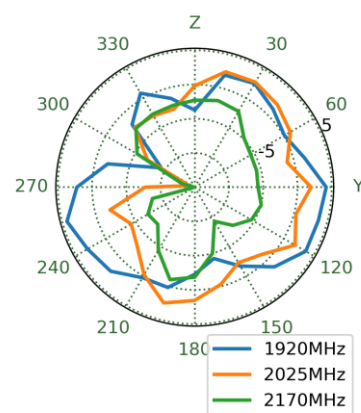


2496MHz

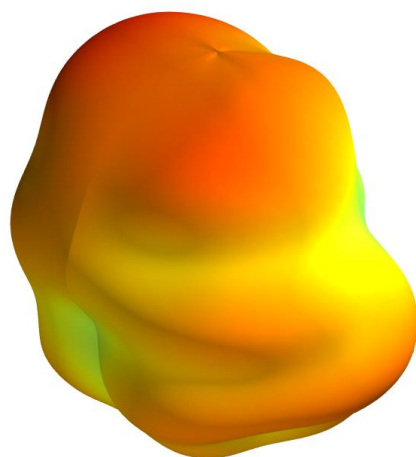


XY Plane

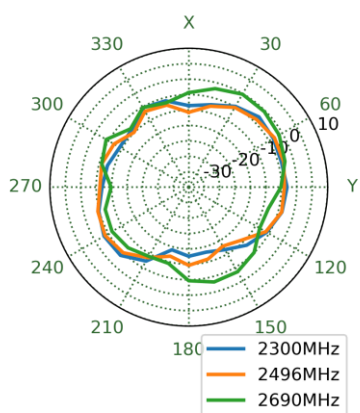


XZ Plane

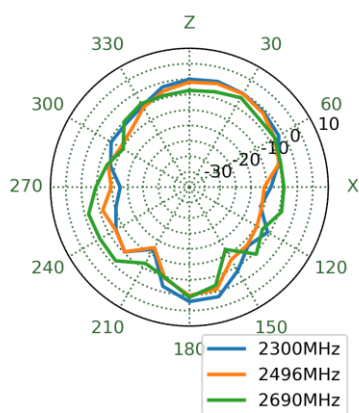


YZ Plane

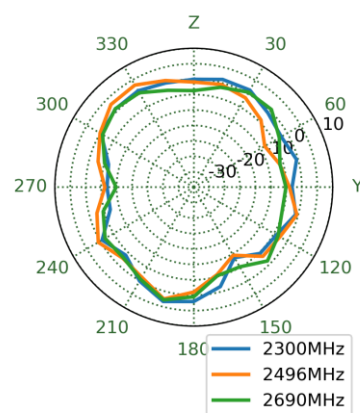


3400MHz

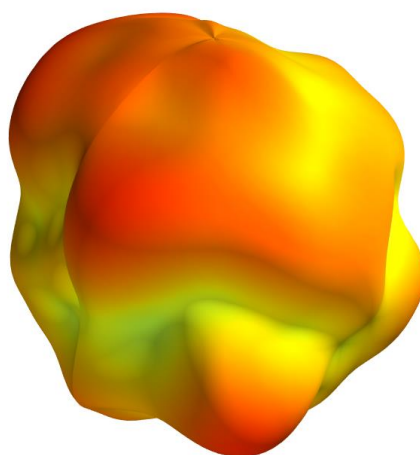


XY Plane

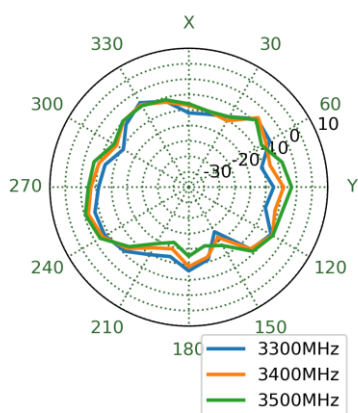


XZ Plane

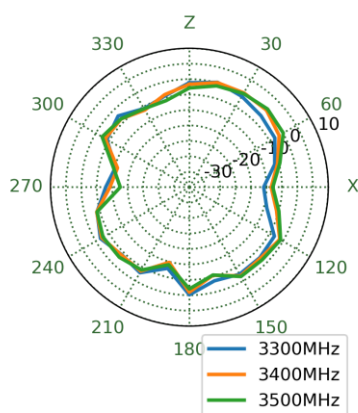


YZ Plane

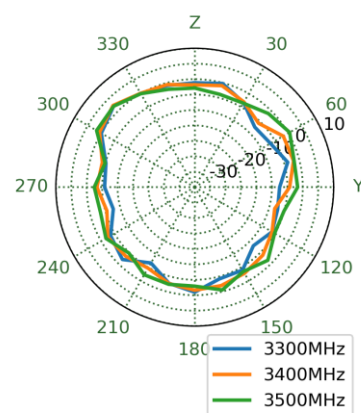


4000MHz

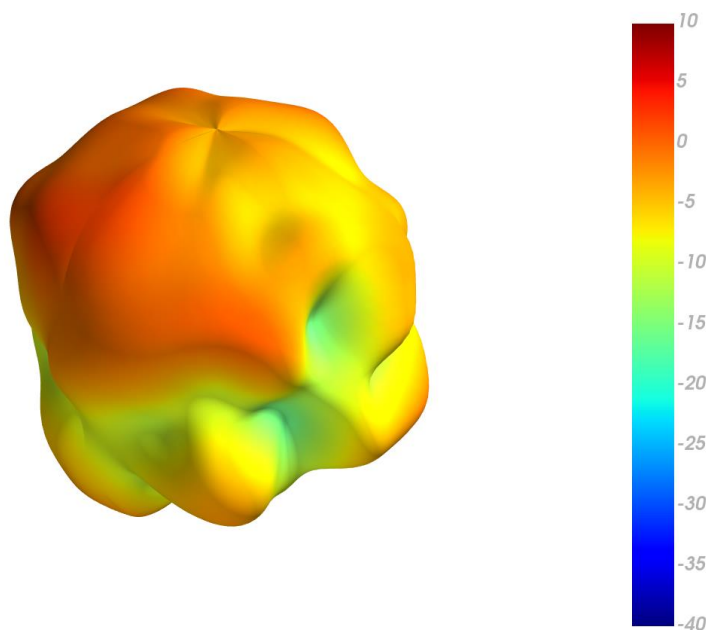


XY Plane

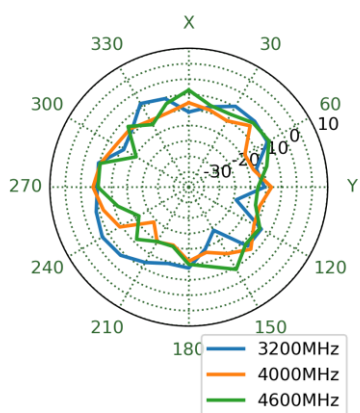


XZ Plane

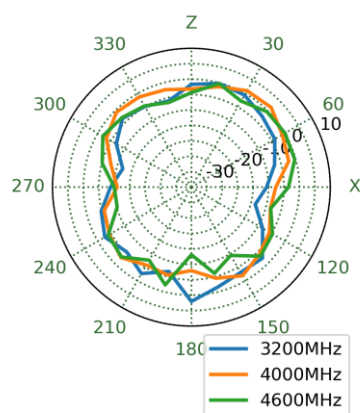


YZ Plane

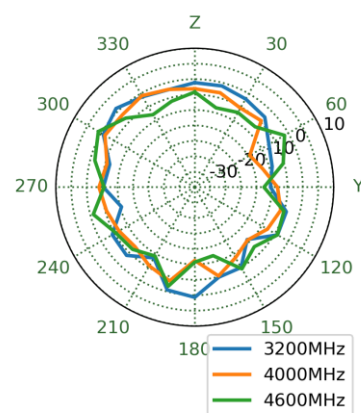


5530MHz

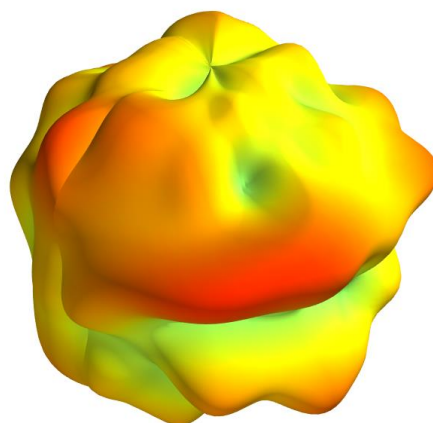


XY Plane

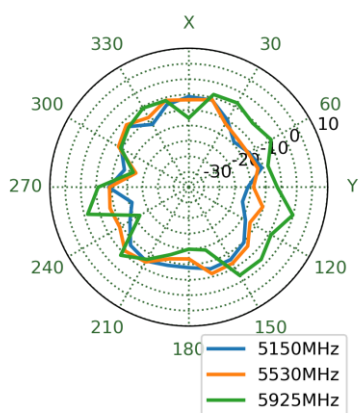

XZ Plane

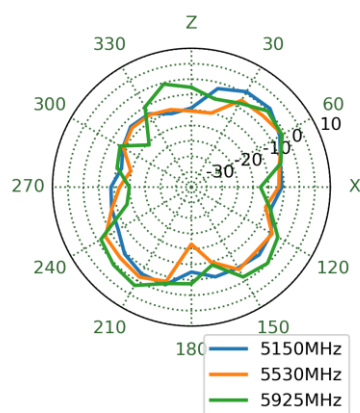


YZ Plane

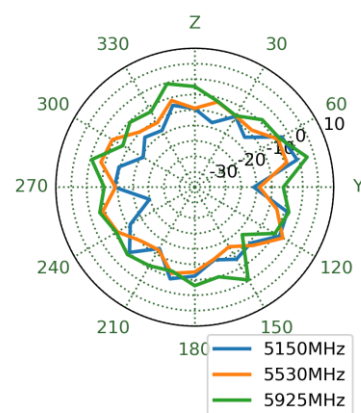


4.3 3D and 2D Radiation Patterns – MIMO 2


1785MHz

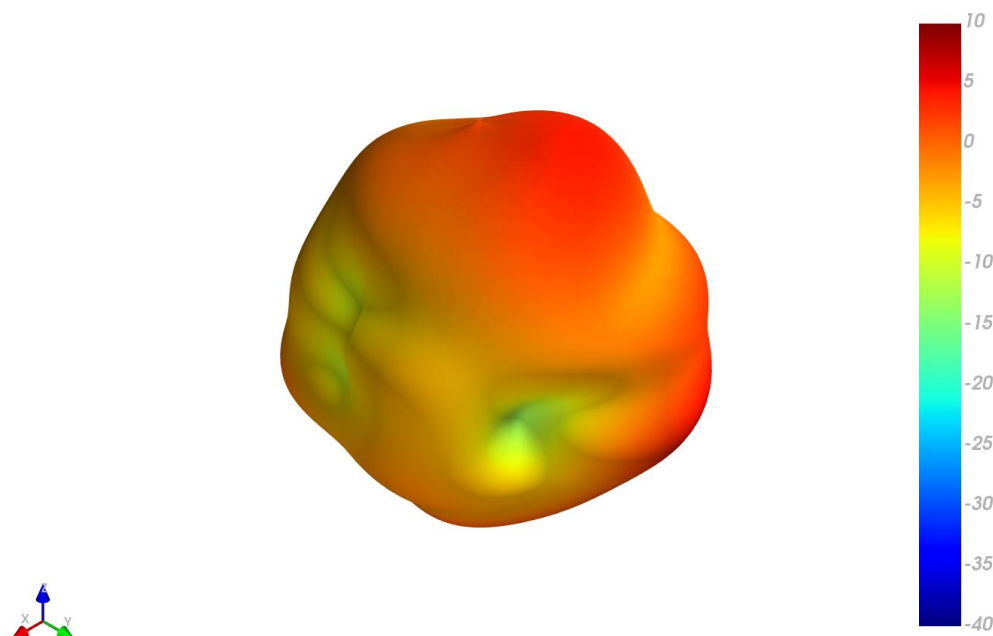


XY Plane

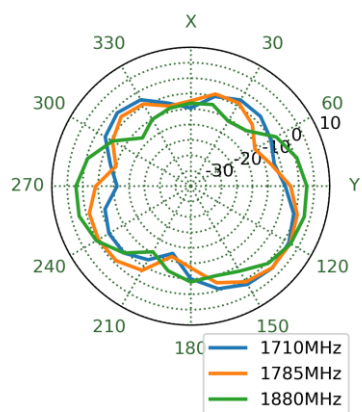


XZ Plane

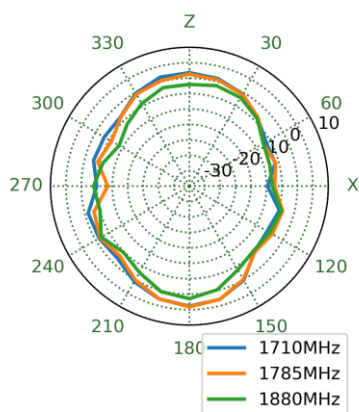


YZ Plane

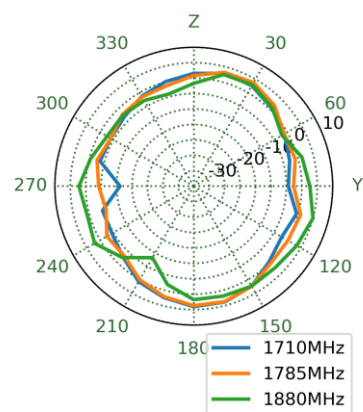


1920MHz

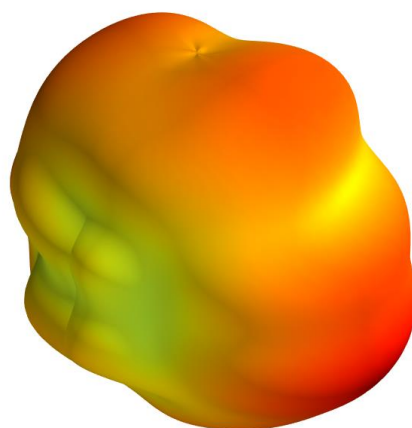


XY Plane

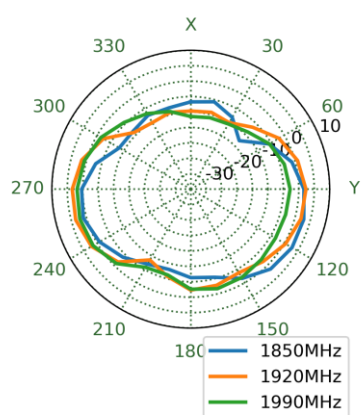



XZ Plane

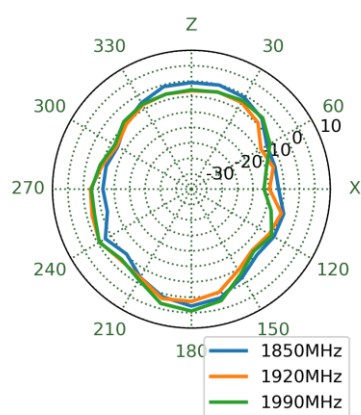


YZ Plane

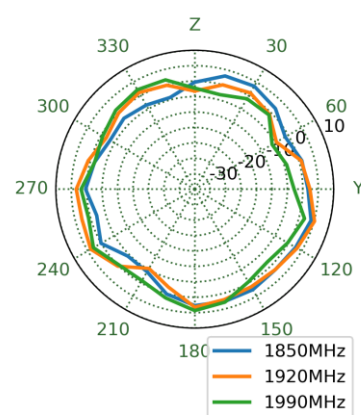


2025MHz

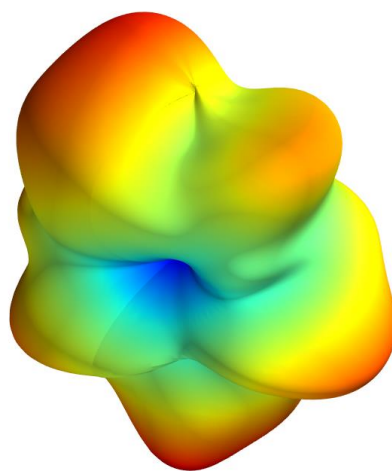


XY Plane

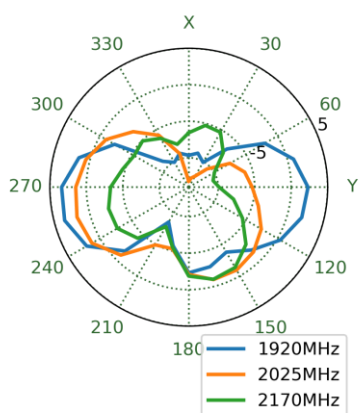


XZ Plane

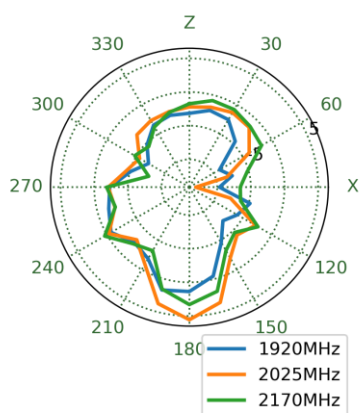


YZ Plane

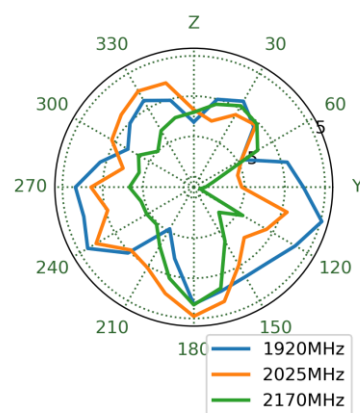


2496MHz

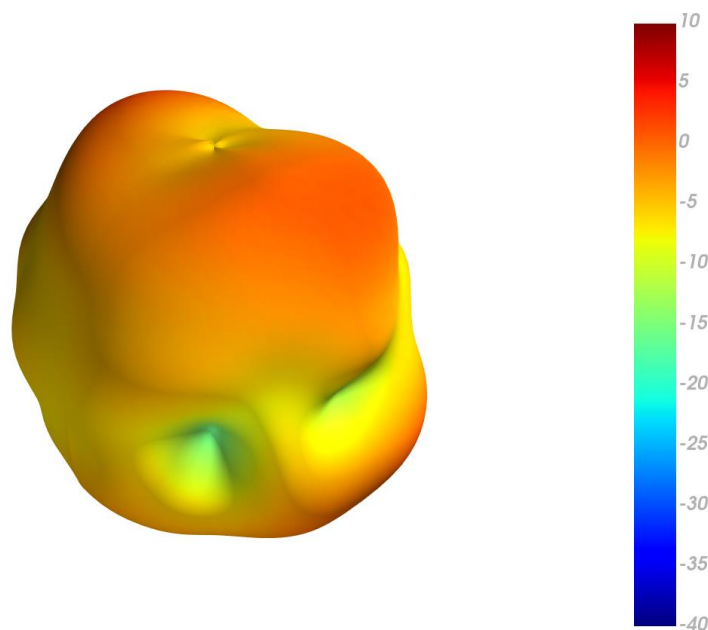


XY Plane

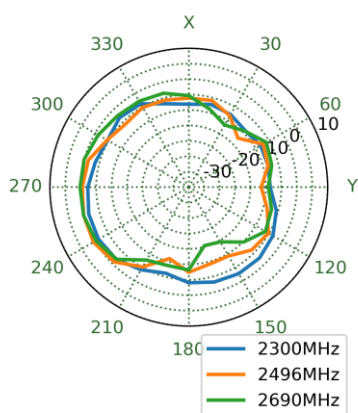


XZ Plane

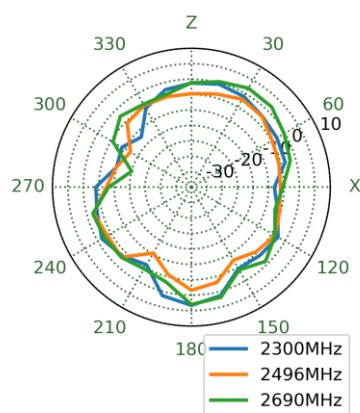


YZ Plane

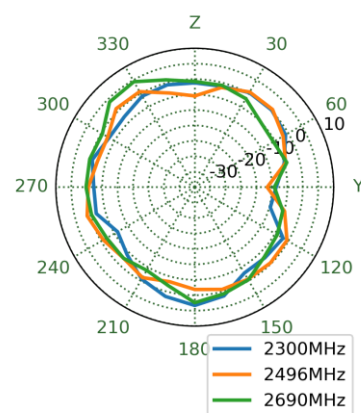


3400MHz

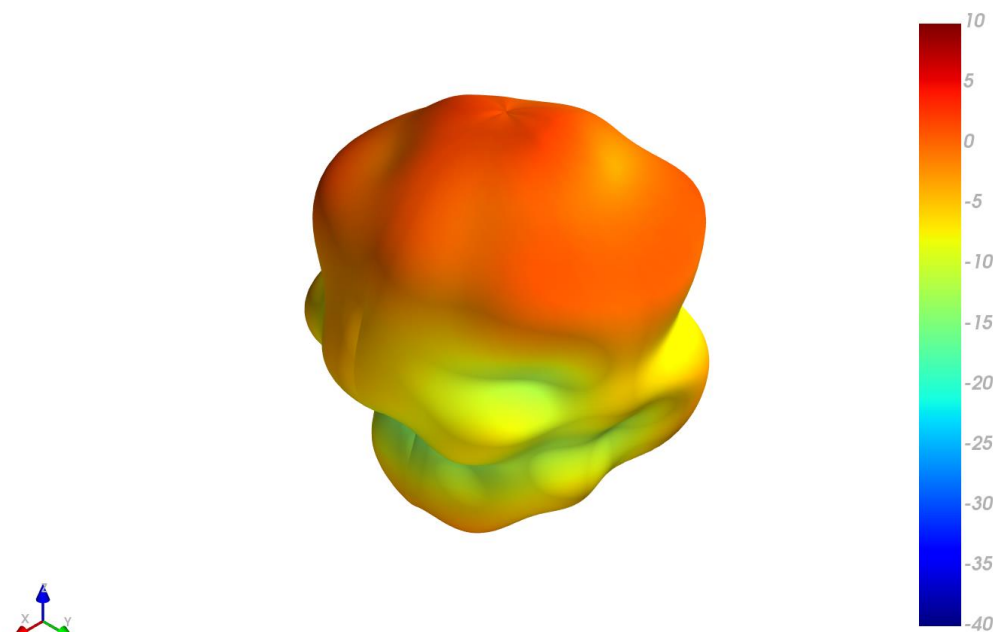


XY Plane

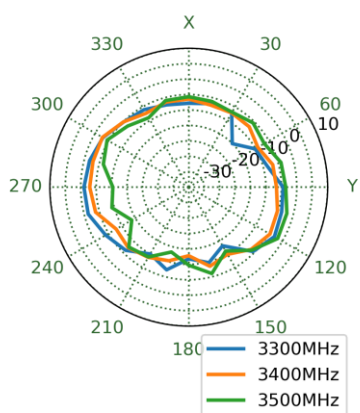


XZ Plane

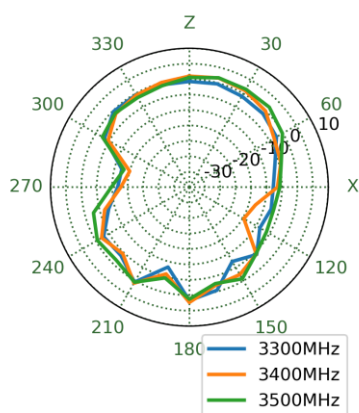


YZ Plane

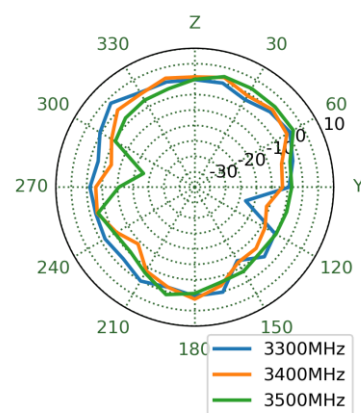


4000MHz

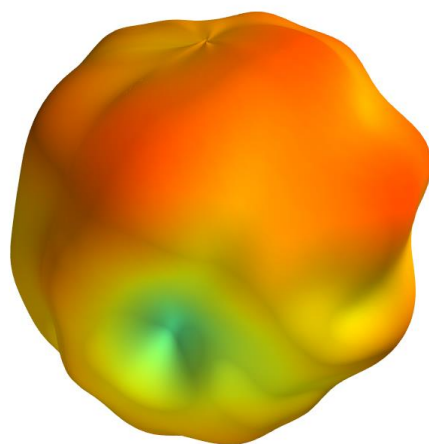


XY Plane

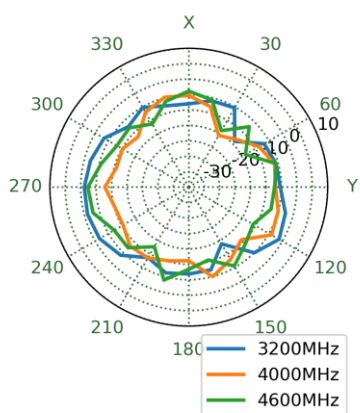


XZ Plane

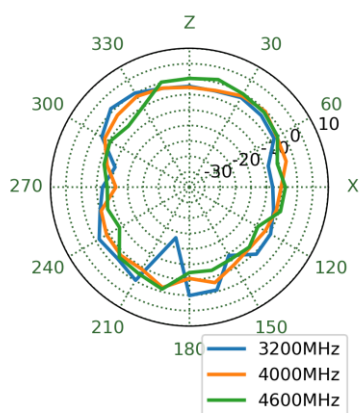


YZ Plane

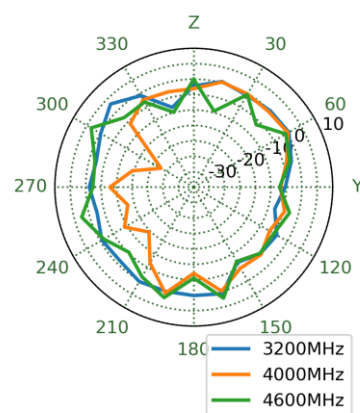


5530MHz

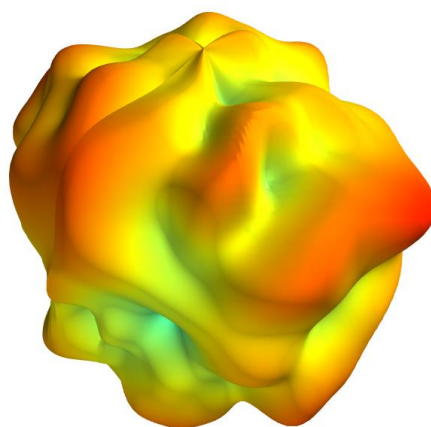


XY Plane

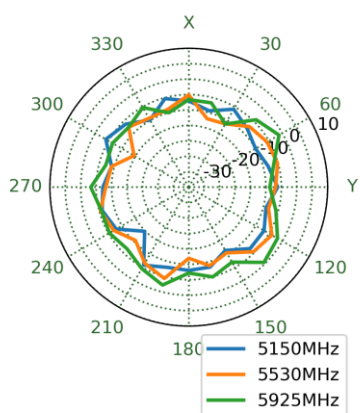

XZ Plane

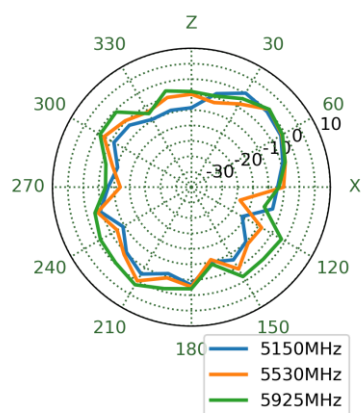


YZ Plane

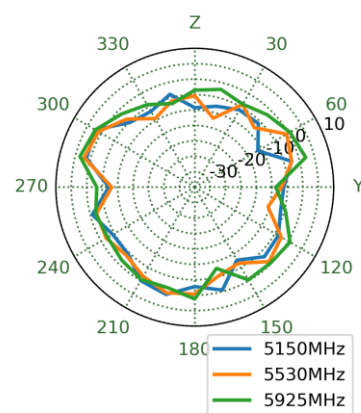


4.4 3D and 2D Radiation Patterns – MIMO 3


1785MHz

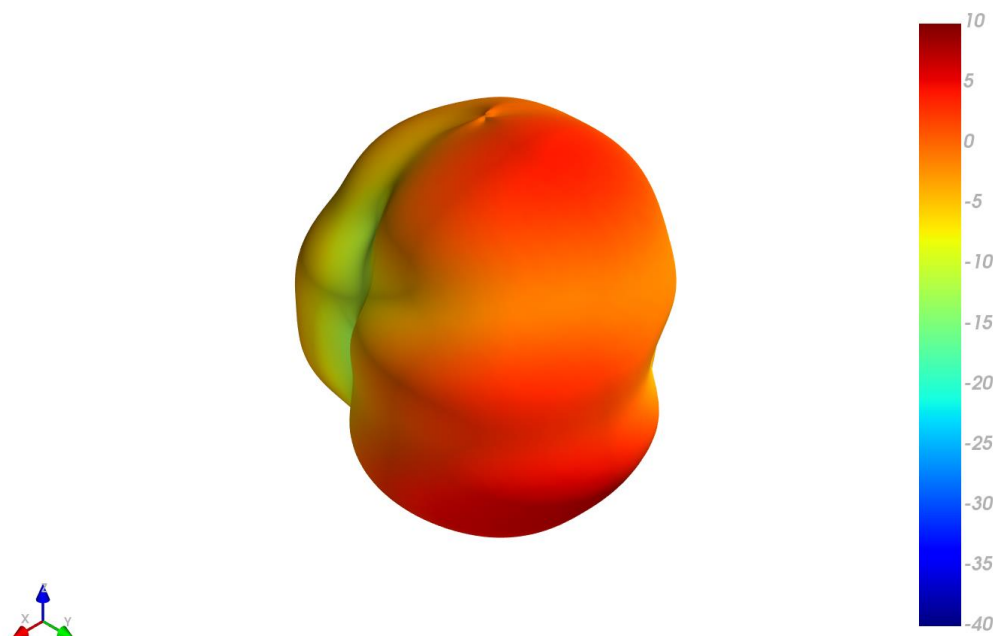


XY Plane

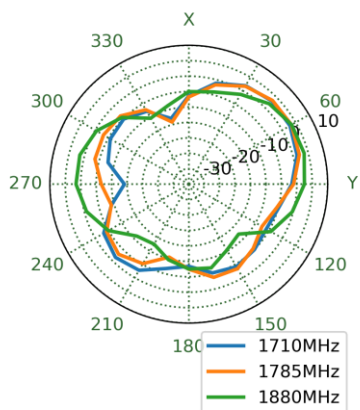


XZ Plane

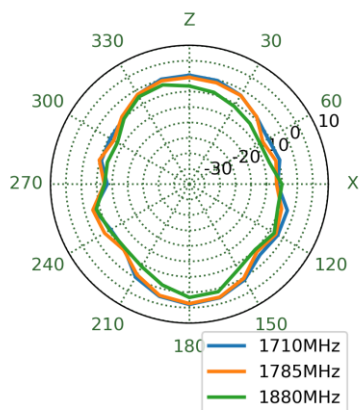


YZ Plane

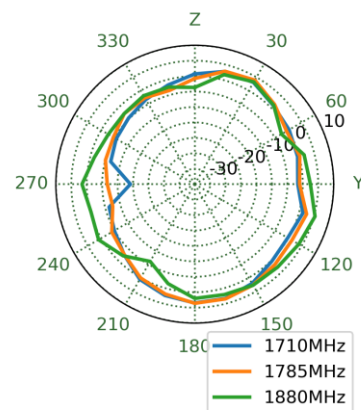


1920MHz

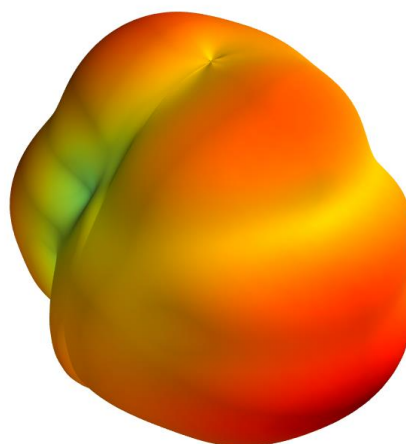


XY Plane

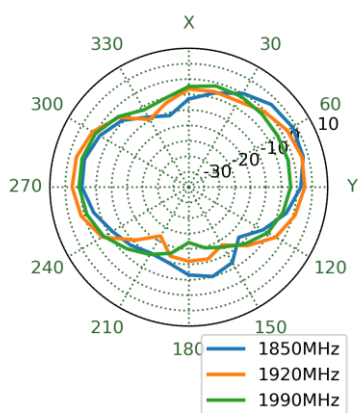


XZ Plane

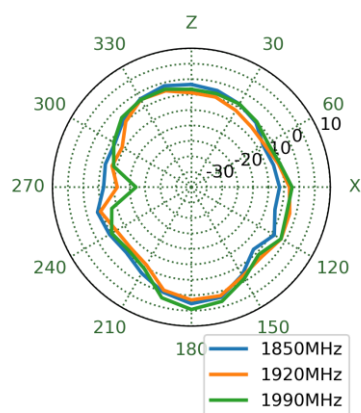


YZ Plane

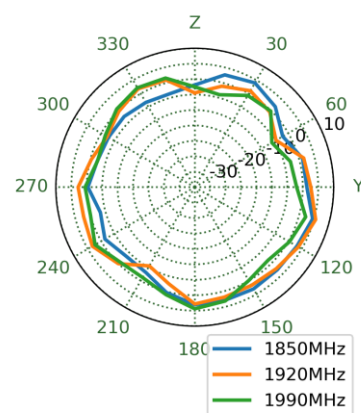


2025MHz

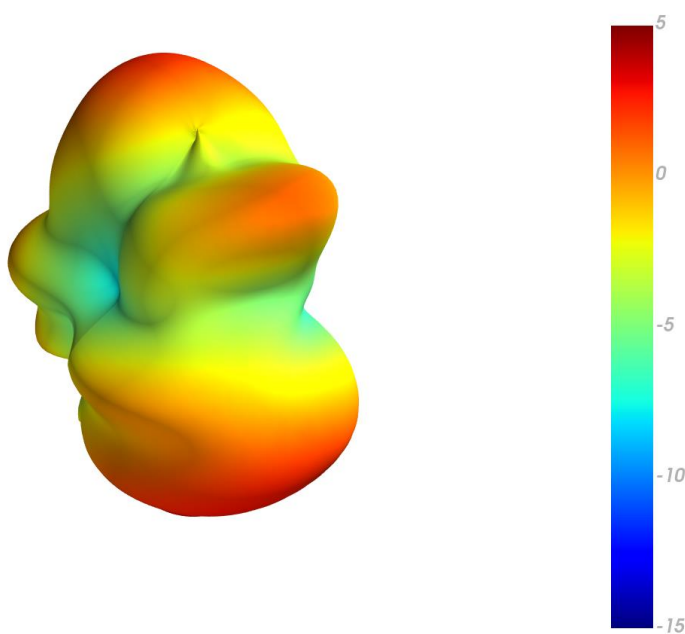


XY Plane

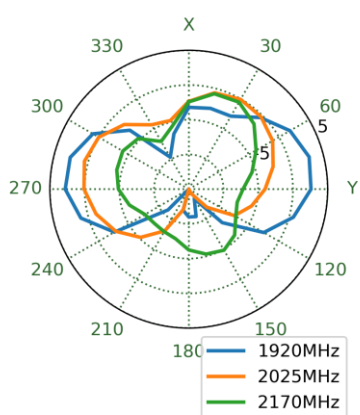


XZ Plane

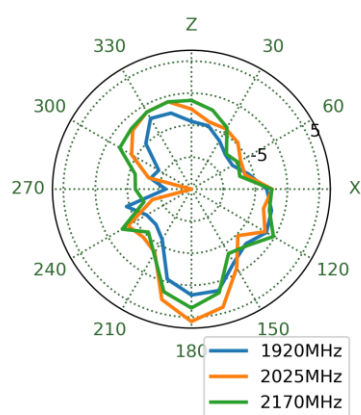


YZ Plane

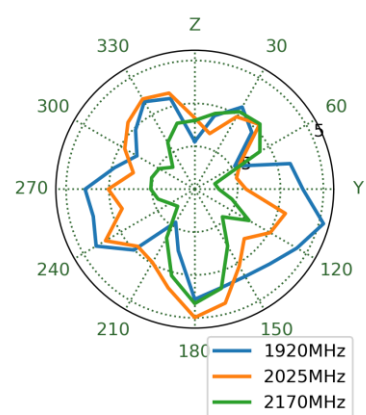


2496MHz

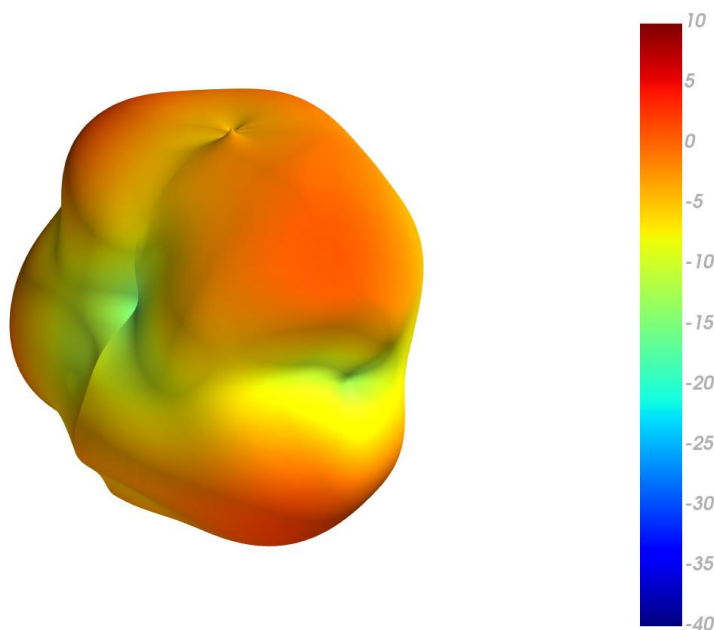


XY Plane

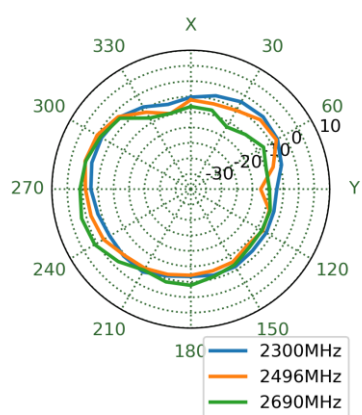


XZ Plane

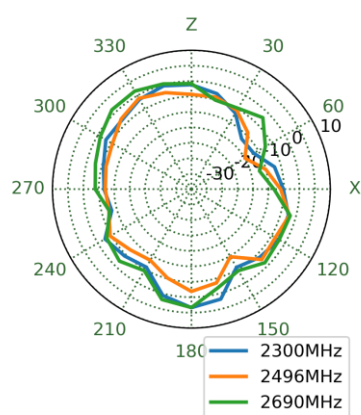


YZ Plane

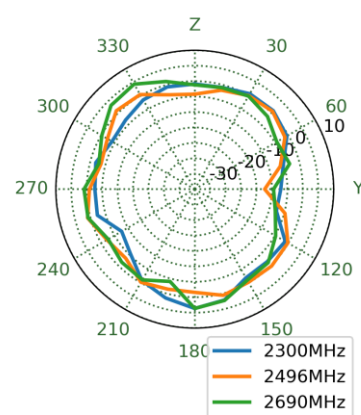


3400MHz

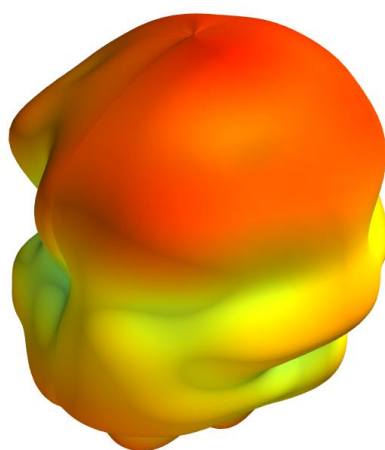


XY Plane

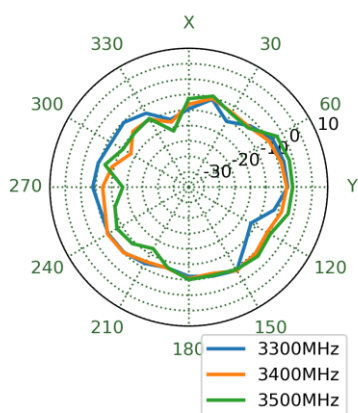


XZ Plane

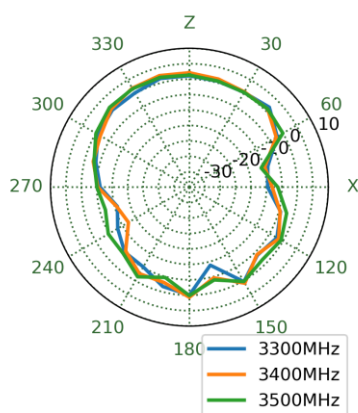


YZ Plane

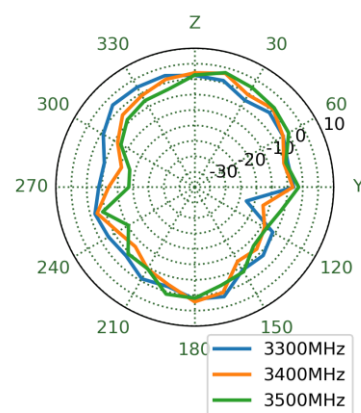


4000MHz

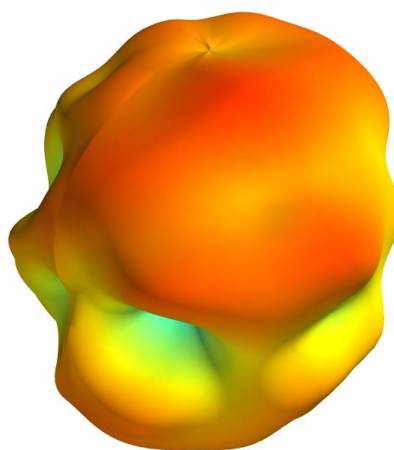


XY Plane

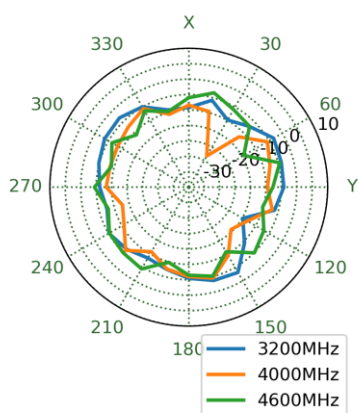


XZ Plane

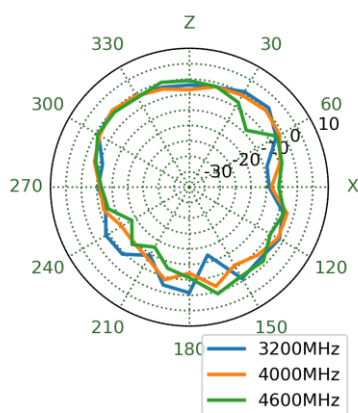


YZ Plane

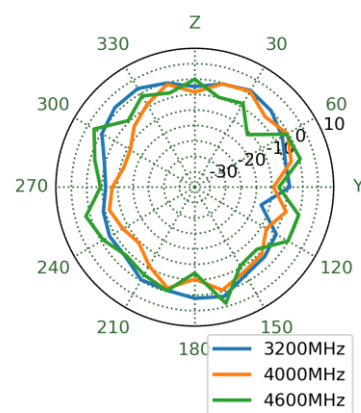


5530MHz

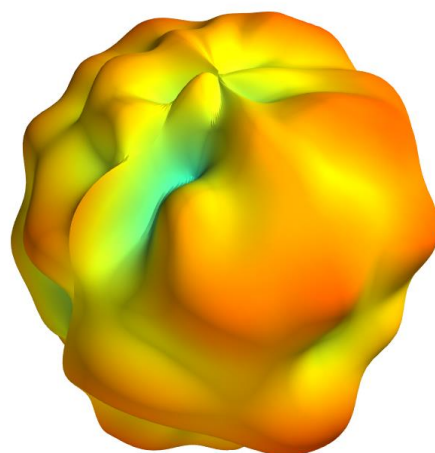


XY Plane

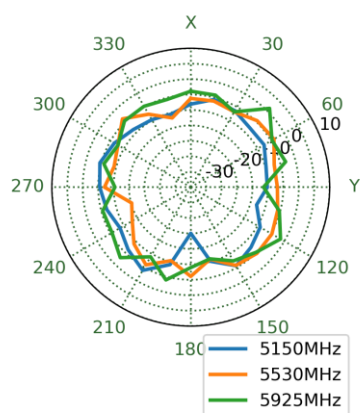

XZ Plane

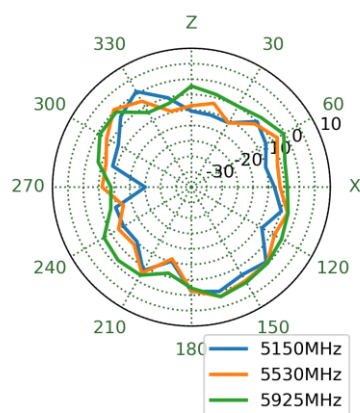


YZ Plane

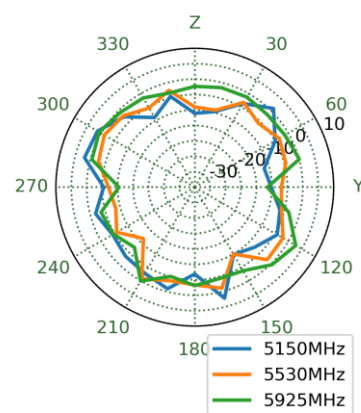


4.5 3D and 2D Radiation Patterns – MIMO 4


1785MHz

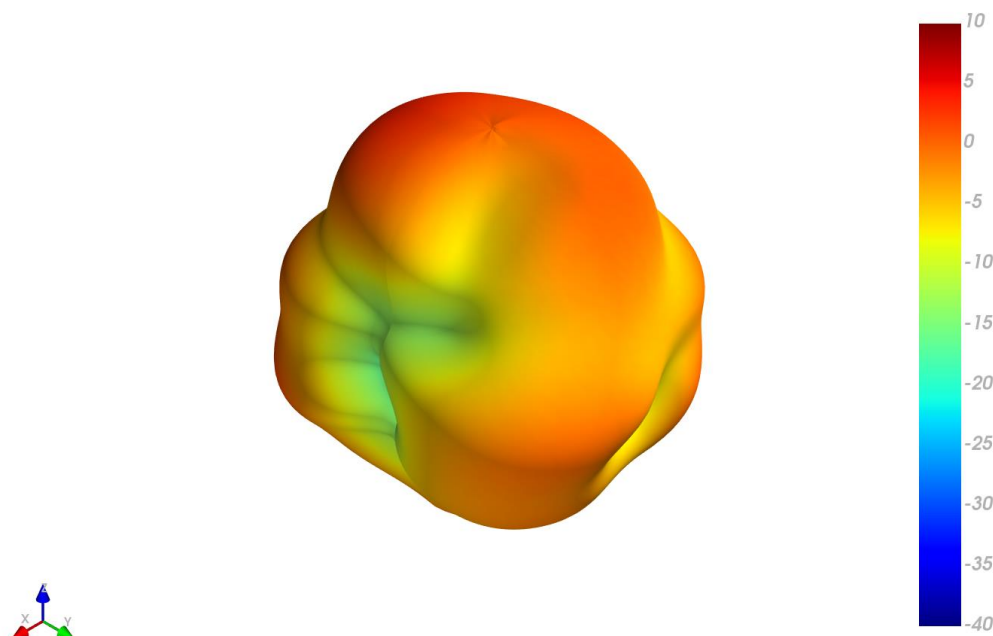


XY Plane

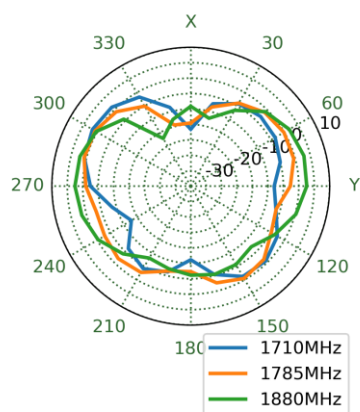


XZ Plane

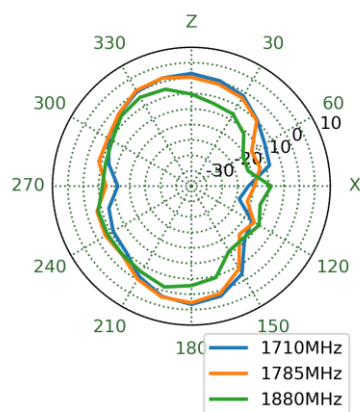


YZ Plane

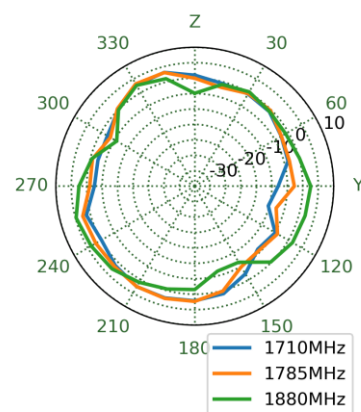


1920MHz

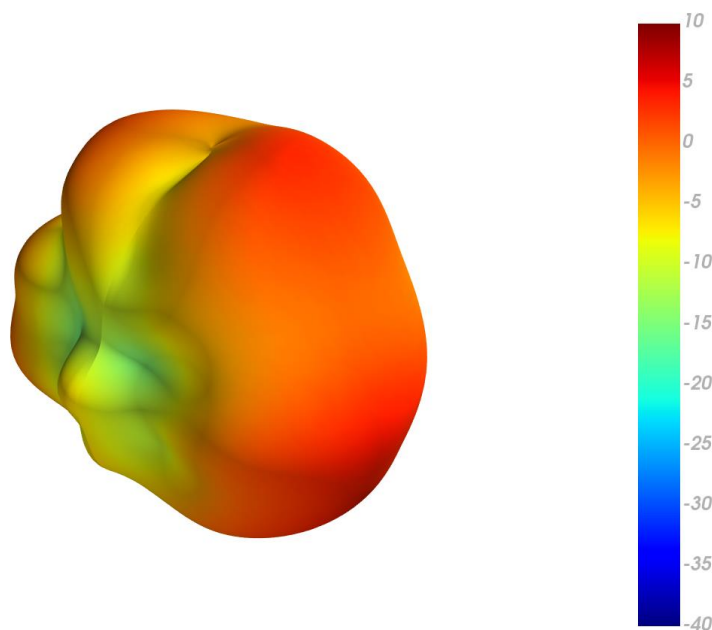


XY Plane

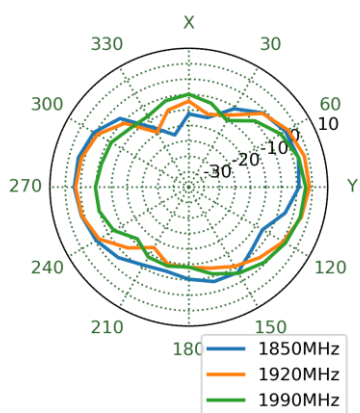


XZ Plane

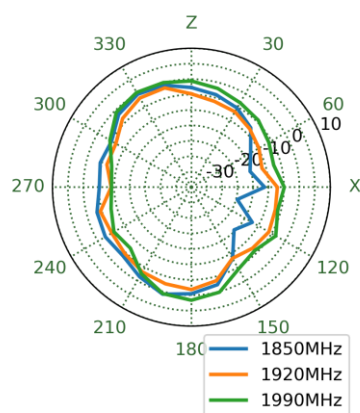


YZ Plane

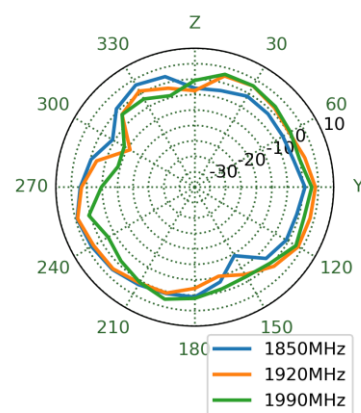


2025MHz

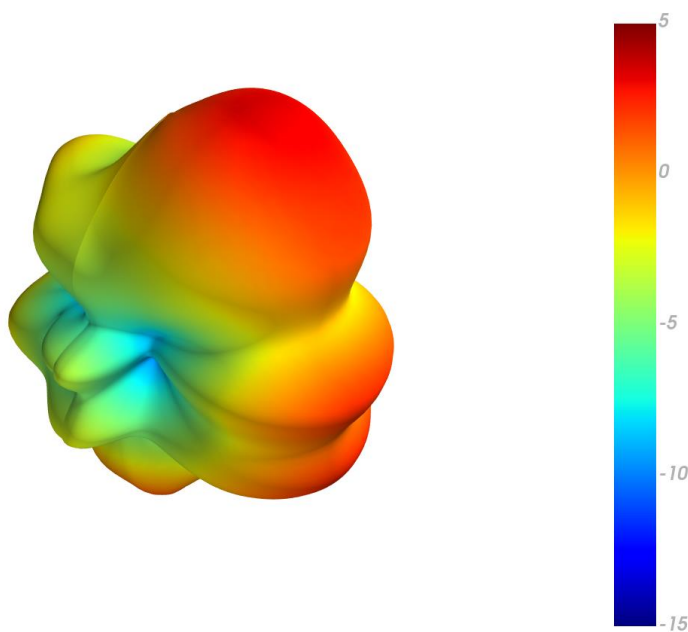


XY Plane

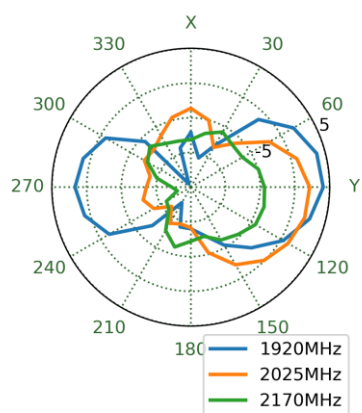


XZ Plane

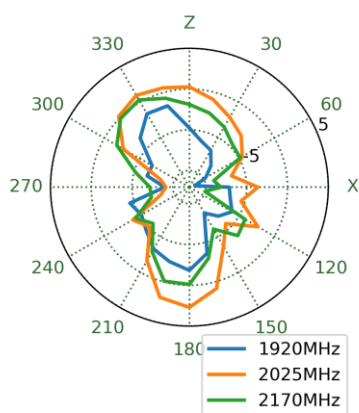


YZ Plane

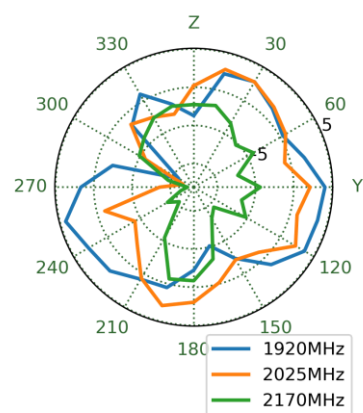


2496MHz

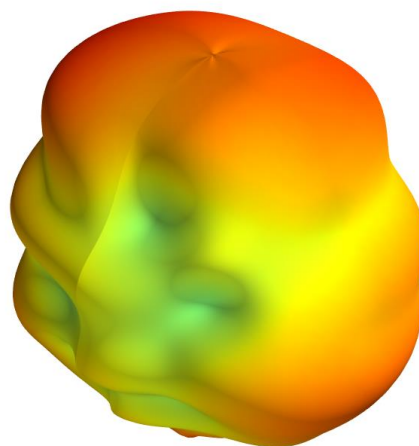


XY Plane

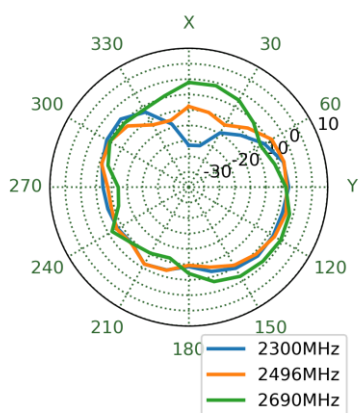


XZ Plane

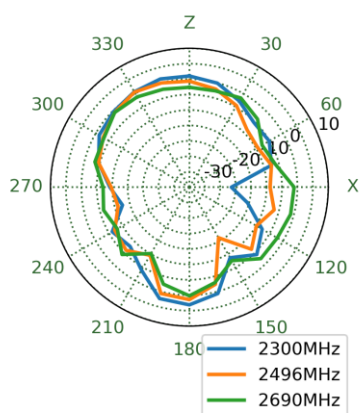


YZ Plane

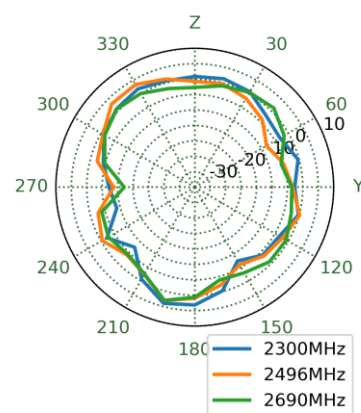


3400MHz

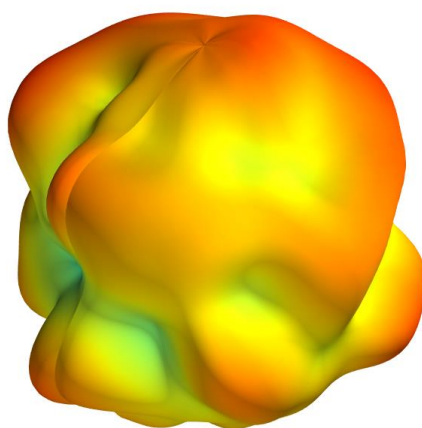


XY Plane

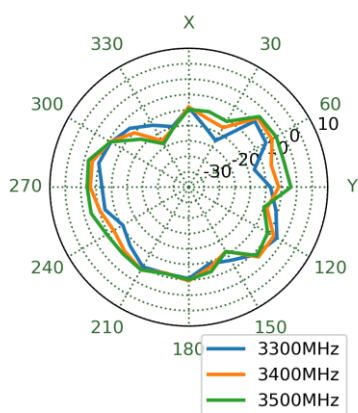


XZ Plane

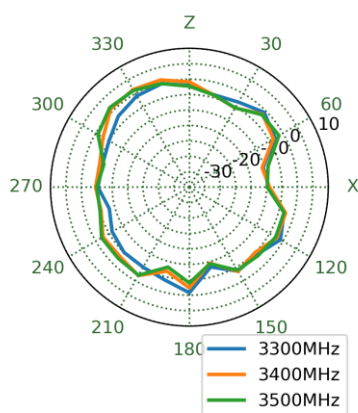


YZ Plane

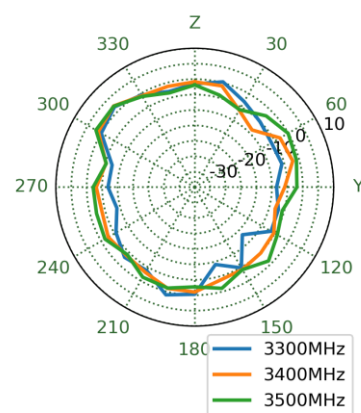


4000MHz

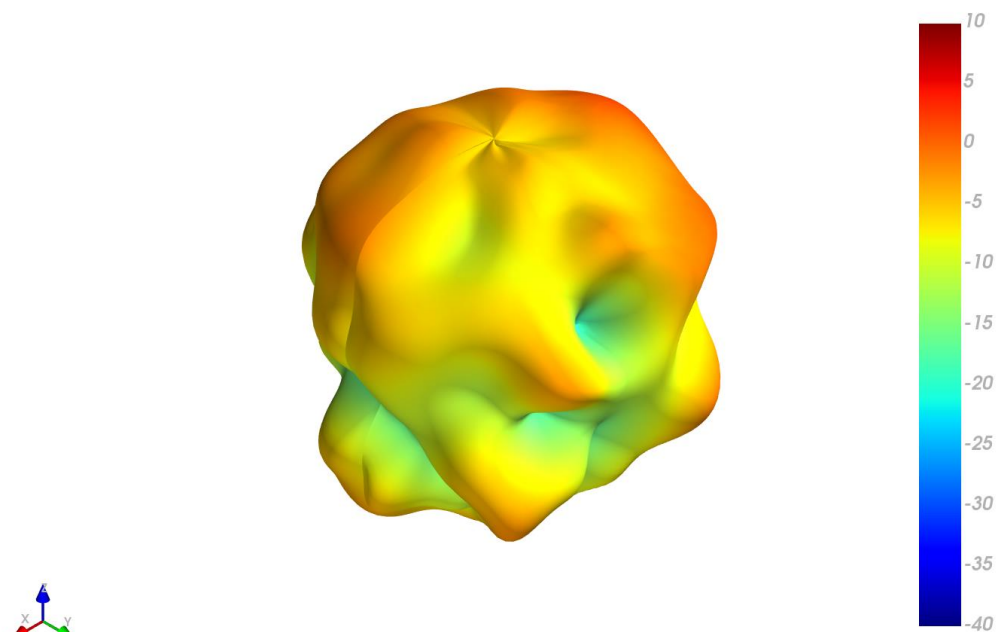


XY Plane

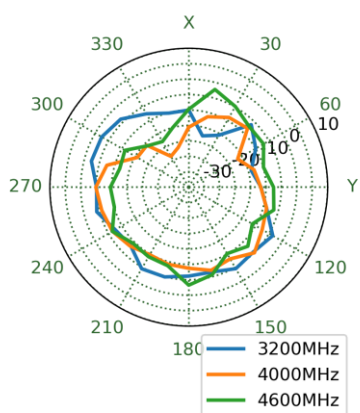


XZ Plane

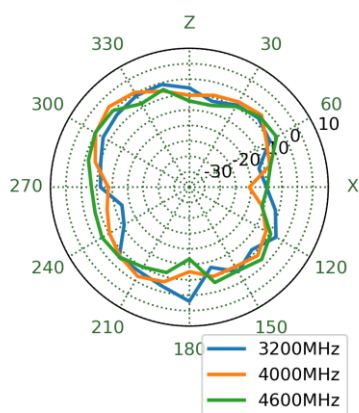


YZ Plane

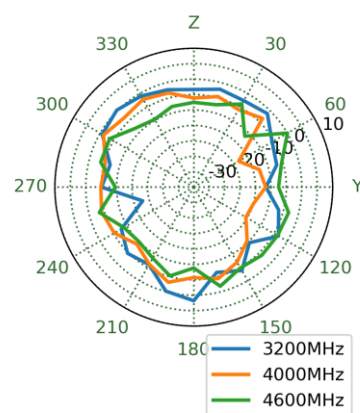


5530MHz

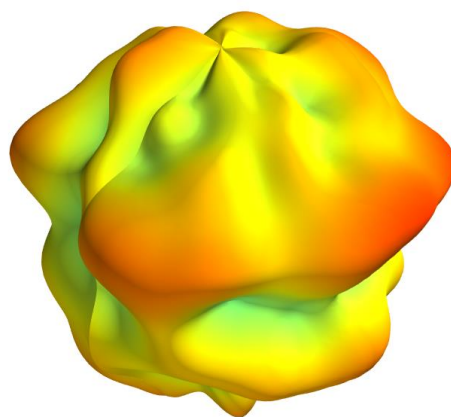


XY Plane

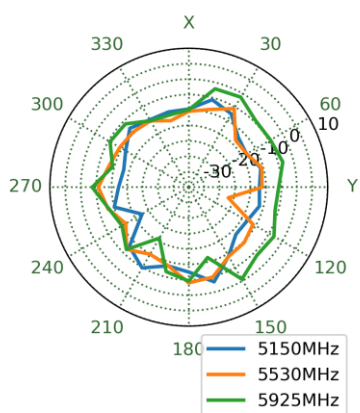

XZ Plane

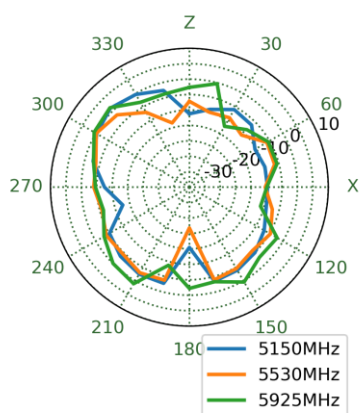

YZ Plane

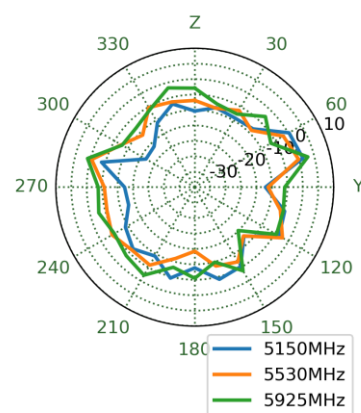


5. Mechanical Drawing (Units: mm)

ISO NO.: EDW-21-8-0340


STATE: Release

NOTES: 1. Soldered area
2. Copper area
3. Logo & Text Ink Printing : White

REV.	DESCRIPTION	ENG.	APPROVED	DATE
D01	Initial Design	Mickey	Buluto	2021/02/22

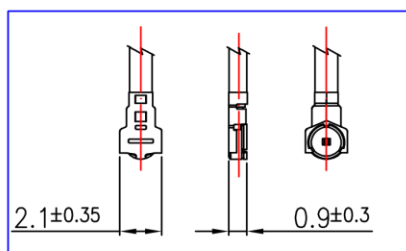

Detail A
Scale: 1:3

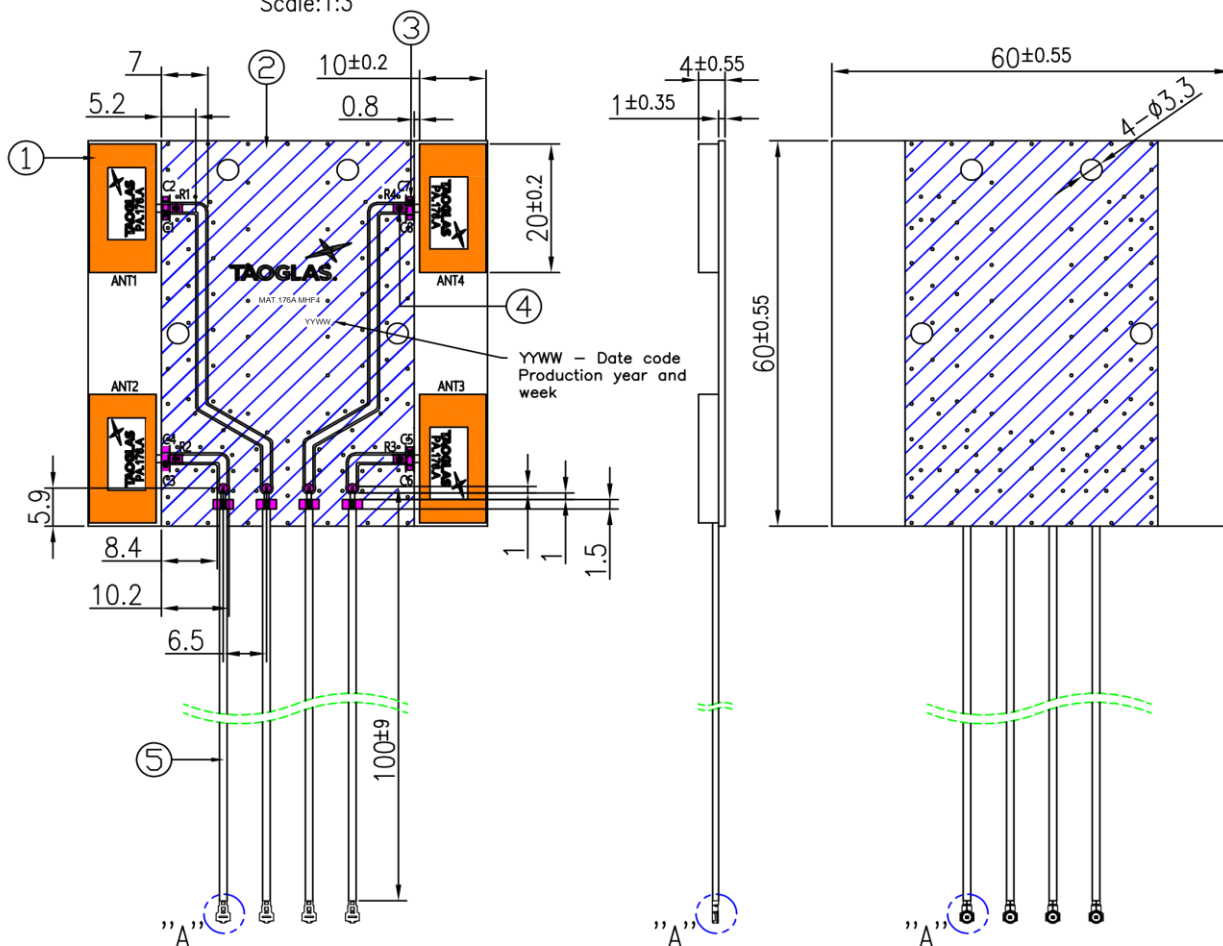


	Name	Material	Finish	QTY
1	PA.176A Antenna	Ceramic	White	4
2	MAT.176A PCB	Composite 1.0t	Black	1
3	L=5.6 nH Inductor (0402)	Ceramic	N/A	4
4	Thick Film Res. (0402/00)	Ceramic	N/A	4
5	1.13 Coaxial Cable to IPEX MHF4	AU Plated	Black	4


APPROVED BY: Buluto	 This drawing and its inherent design concepts are property of Taoglas. Not to be copied or given to third parties without the written consent of Taoglas.			
CHECK BY: Adam				
DRAWN BY: Mickey	TITLE : 4-in-1 5G Multi-Antenna Board (84x45mm) antennas with 4x 100mm 1.13 Cables & MHF4 Connectors PART NO. : MAT.176A			
DATE: 2021/02/22				
UNLESS OTHERWISE SPECIFIED TOLERANCES ON:	XX±0.5 X±0.3 X±0.2 X0±0.1 X02±0.05	UNIT: mm	SCALE: 1:1	PAGES: 1/1
THIRD ANGLE PROJECTION		REV. D01		

6. Packaging


1 pc MAT.176A
per Bubble bag
Weight - 35g

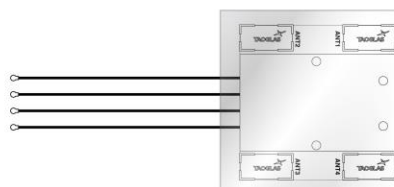

1 pc MAT176A
1 pc Humidity Indicator Card
1 pc Silica Gel Dessicant
per sealed PE Bag

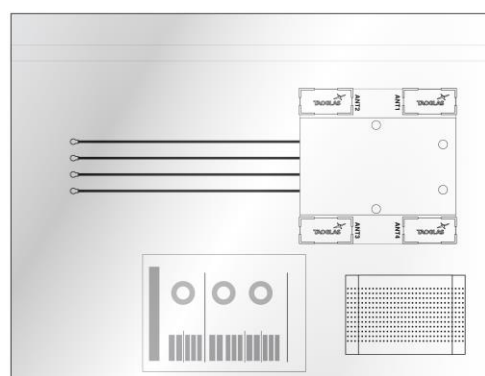

75 pcs MAT.176A per Carton
Carton Dimensions - 330 x 280 x 270mm
Weight - 2.62Kg

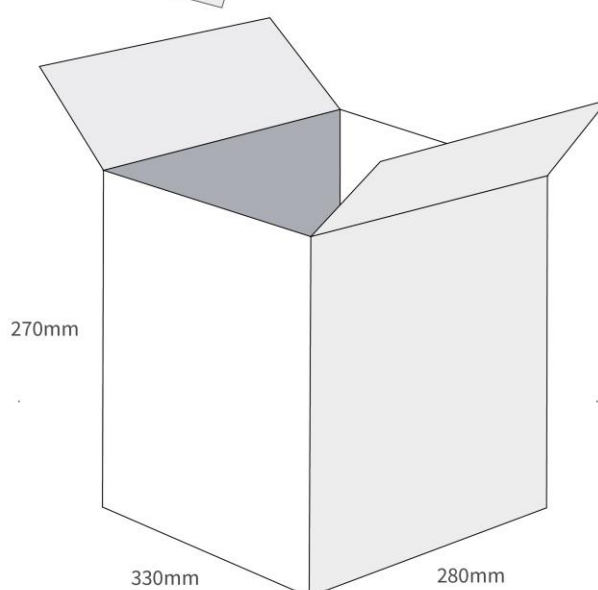

Changelog for the datasheet

SPE-21-8-041 – PA.176.A

Revision: A (Original First Release)	
Date:	2020-06-12
Notes:	Initial Release
Author:	Jack Conroy



www.taoglas.com