

SBT5100LSS

ULTRA LOW VF SCHOTTKY RECTIFIER

Voltage

100 V

Current


5 A

Features

- Ultra low forward voltage drop, low power loss
- High efficiency operation
- Lead free in compliance with EU RoHS2.0 (2011/65/EU & 2015/865/EU directive).


Mechanical Data

- Case: Molded plastic, DO-201AD
- Terminals: Axial leads, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode end
- Approx. Weight: 0.0402 ounces, 1.142 grams
- Marking: Part number



DO-201AD

Unit: inch(mm)

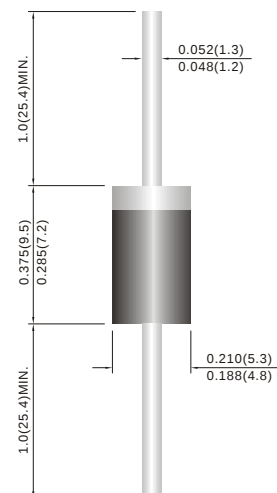

Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	100	V
Maximum rms voltage	V_{RMS}	70	V
Maximum dc blocking voltage	V_R	100	V
Maximum average forward rectified current	$I_{F(AV)}$	5	A
Peak forward surge current : 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	80	A
Typical thermal resistance (Note 1)	$R_{\theta JL}$	23	$^{\circ}\text{C/W}$
Operating junction temperature range	T_J	-55 to +150	$^{\circ}\text{C}$
Storage temperature range	T_{STG}	-55 to +150	$^{\circ}\text{C}$

Note : 1. The testing condition of the thermal resistance (junction to ambient and junction to lead) is based on 0.375"(9.5mm) lead length between two 10x10cm copper pad heatsinks.

2. Short duration pulse test used to minimize self-heating effect.



SBT5100LSS

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNITS
Breakdown voltage	V_{BR}	$I_R=0.5\text{mA}$	$T_J=25^{\circ}\text{C}$	100	-	-	V
Instantaneous forward voltage	V_F	$I_F=1\text{A}$	$T_J=25^{\circ}\text{C}$	-	0.44	-	V
		$I_F=2\text{A}$		-	0.5	-	
		$I_F=5\text{A}$		-	-	0.7	
		$I_F=1\text{A}$	$T_J=125^{\circ}\text{C}$	-	0.36	-	V
Reverse current	I_R	$V_R=80\text{V}$	$T_J=25^{\circ}\text{C}$	-	3	-	μA
		$V_R=100\text{V}$	$T_J=25^{\circ}\text{C}$	-	-	20	μA
			$T_J=125^{\circ}\text{C}$	-	3	-	mA

SBT5100LSS

TYPICAL CHARACTERISTIC CURVES

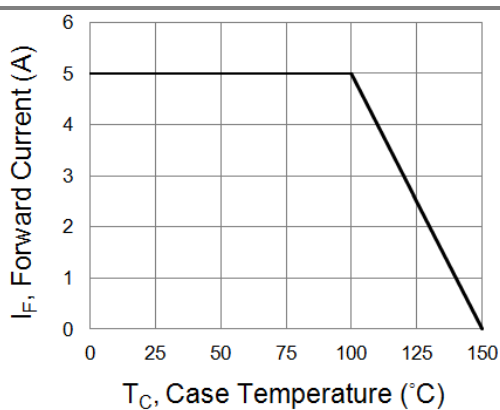


Fig.1 Forward Current Derating Curve

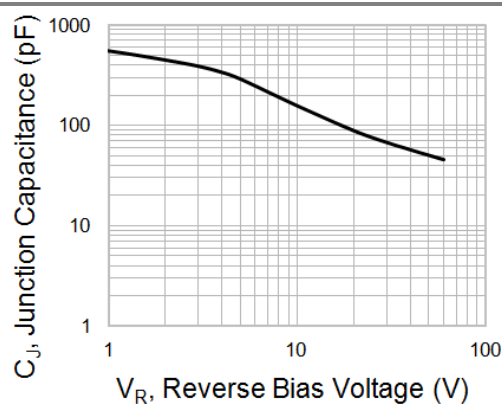


Fig. 2 Typical Junction Capacitance

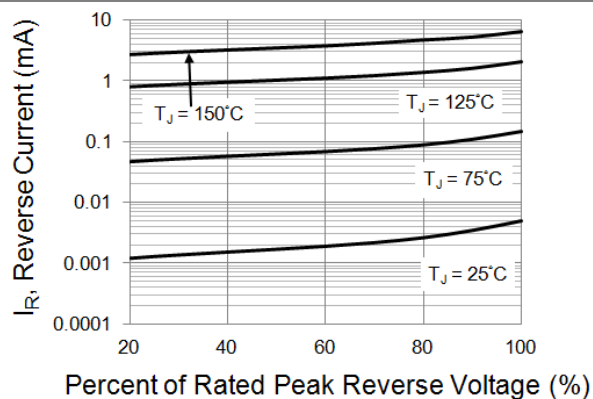


Fig.3 Typical Reverse Characteristics

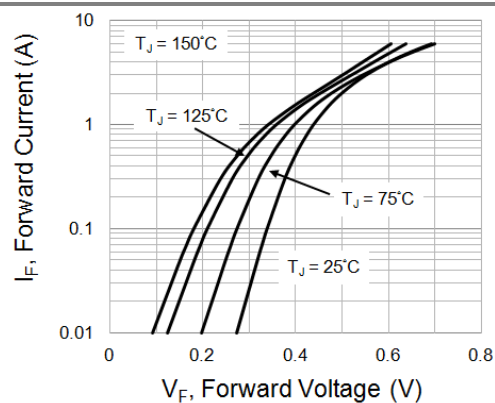


Fig. 4 Typical Forward Characteristics

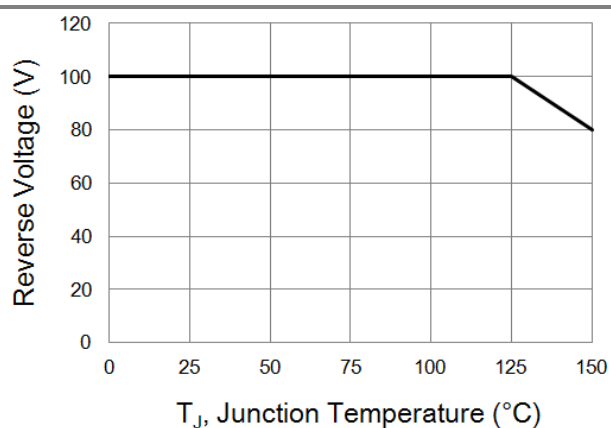


Fig.5 Operating Temperature Derating Curve



SBT5100LSS

Part No Packing Code Version

Part No Packing Code	Package Type	Packing Type	Marking	Version
SBT5100LSS_AY_00001	DO-201AD	1250pcs / Ammo	SBT5100LSS	Halogen free
SBT5100LSS_B0_00001	DO-201AD	500pcs / Box	SBT5100LSS	Halogen free
SBT5100LSS_R2_00001	DO-201AD	1250pcs / 13" reel	SBT5100LSS	Halogen free



SBT5100LSS

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.