


FS5700 SERIES PUSHBUTTON SWITCH



APPLICATIONS / MARKETS

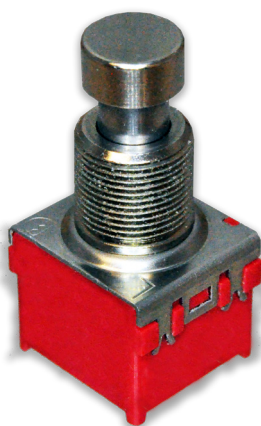

Gaming: Flight Simulation




Home Appliances



Floor Care Appliances



Industrial Controls



Medical / Dental



Foot Switch

RoHS

SPECIFICATIONS

Contact Rating: 1A @ 9VDC
Electrical Life: 30,000 Cycles
Contact Resistance: 50mΩ Initial
Insulation Resistance: 100MΩ @ 500VDC
Dielectric Strength: 1000V RMS
Operating Temperature: -10°C to 70°C
Storage Temperature: -10°C to 70°C
Full Travel: SP & DP: 2.7mm; 3P: 5.0mm
Contact Arrangement: SPDT, DPDT or 3PDT
Actuation Force: Single pole momentary: 1700gf
 Single pole alternate action: 1000gf
 Double pole momentary: 2500gf
 Double pole alternate action: 1600gf
 3 pole alternate action: 3000gf
Panel Thickness: 8mm Max.

FEATURES & BENEFITS

- SPDT, DPDT or 3PDT
- Momentary or alternate action functions
- High actuation force
- PCB mount or panel mount option

PART NUMBER CONFIGURATOR

Series	Circuit	Function	Actuator	Bushing	Terminal	Contact Material	Sealing	Hardware
FS5700	SP SP - Single Pole DP - Double Pole 3P* - 3 Pole	L L - Alternate Action M - Momentary	T2 T2 - 10mm dia.	B2 B2 - 11.5 high	M1 M1 - Solder Lug M2 - PCB Pins	Q Q - Silver	E E - Epoxy	H H** - Hardware

*3P only available in "L" function

**Hardware only provided with "M1" termination

Specifications subject to change without notice 4.2.2018







E-SWITCH®

www.e-switch.com

800.867.2717



1

SINGLE POLE

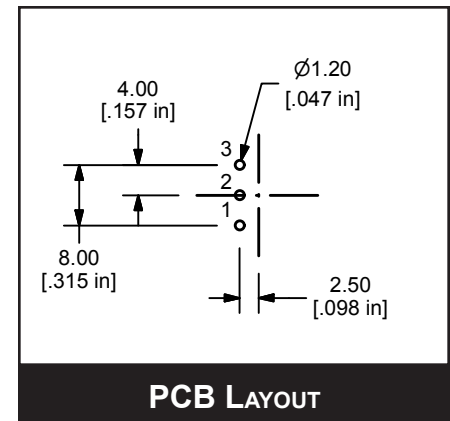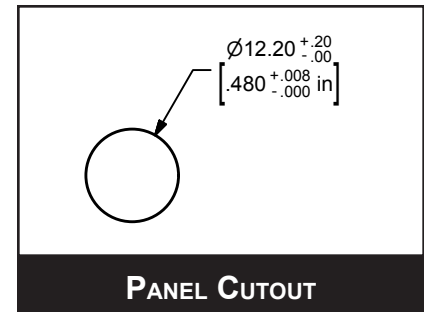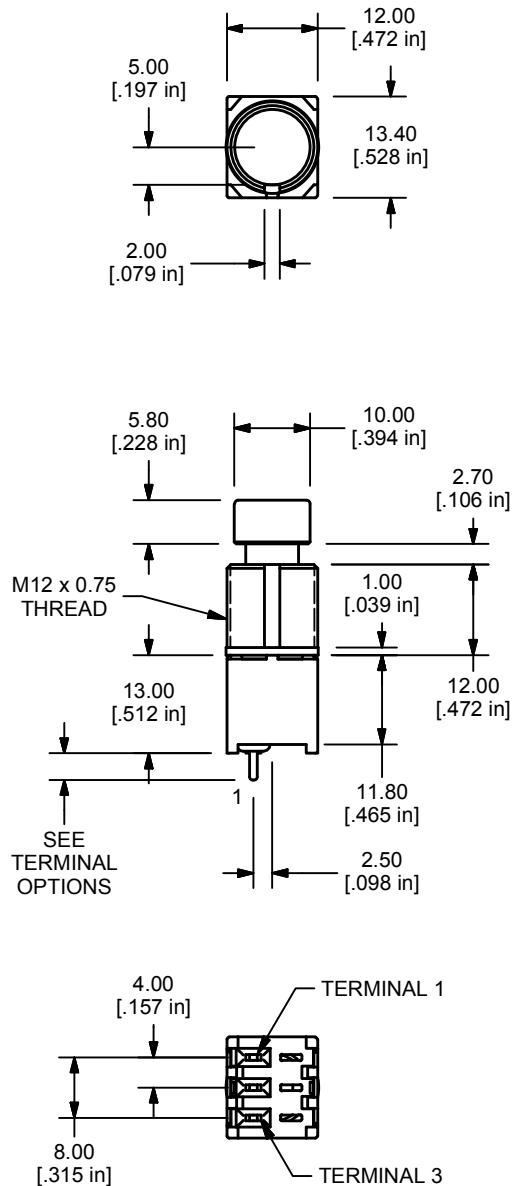


FS5700 SERIES PUSHBUTTON SWITCH


DOUBLE POLE

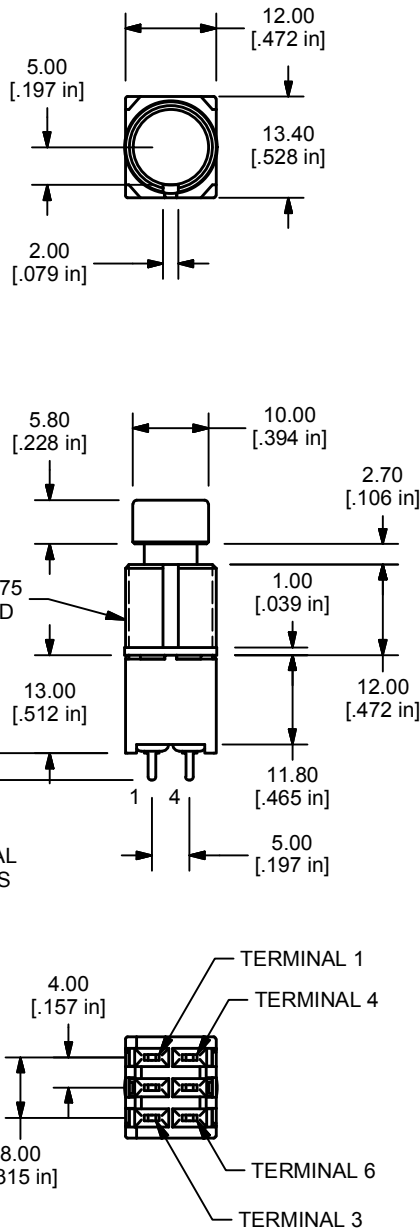

DPDT SCHEMATIC



PANEL CUTOUT

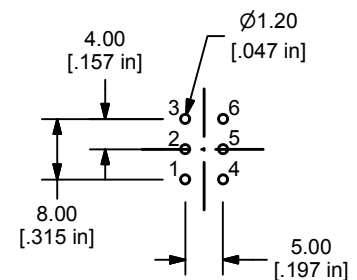

PCB LAYOUT





E-SWITCH®

www.e-switch.com


800.867.2717

3


TRIPLE POLE

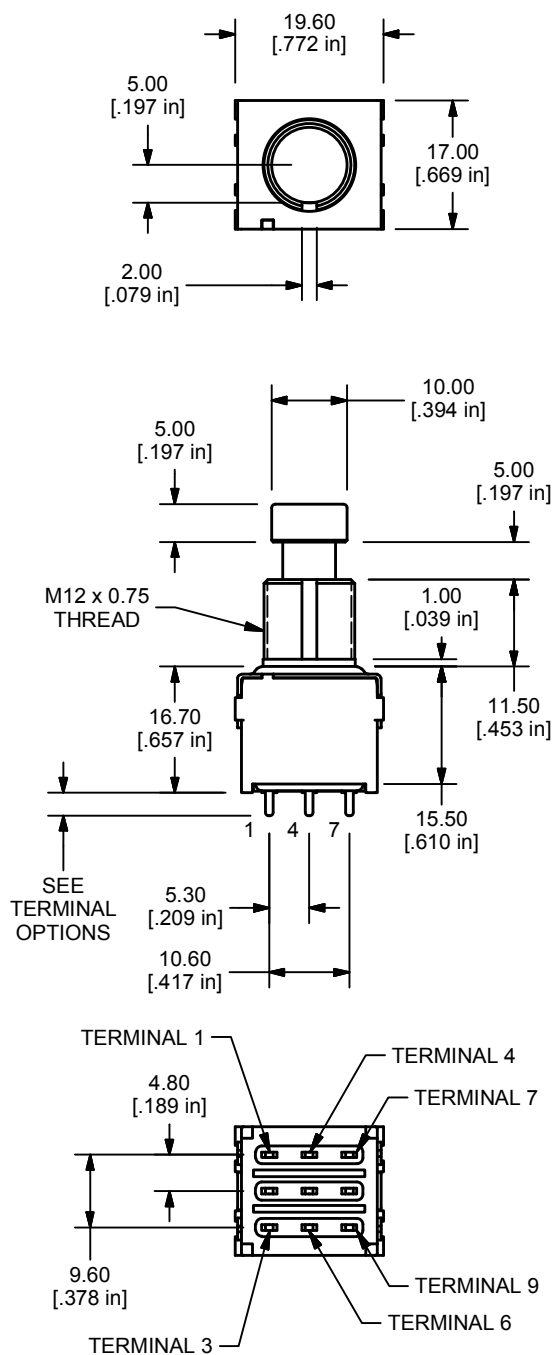

3PDT SCHEMATIC



PANEL CUTOUT




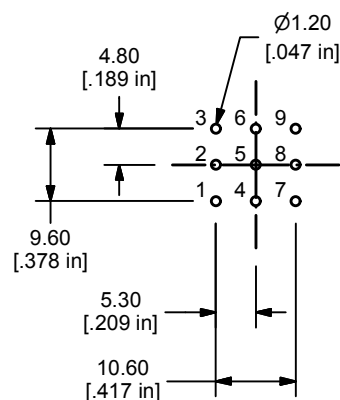


PCB LAYOUT

FS5700 SERIES PUSHBUTTON SWITCH

TERMINATION OPTIONS





M1 TERMINATION

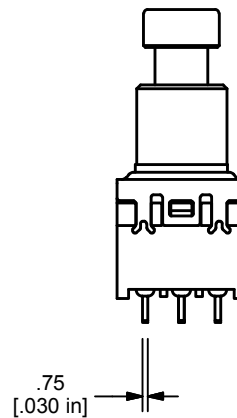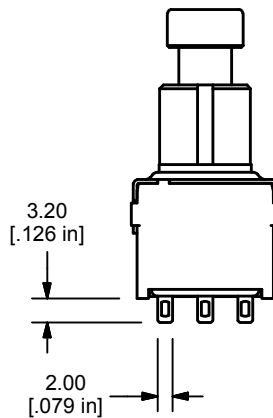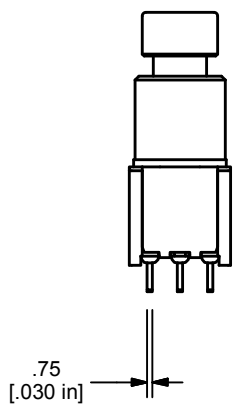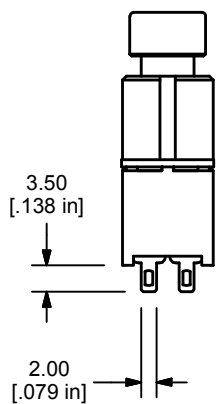

M1 TERMINAL FOR 1P OR 2P
2P SWITCH SHOWN

M1 TERMINAL FOR
3P SWITCH

M2 TERMINATION

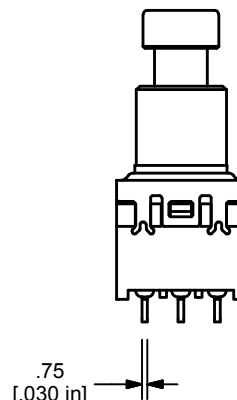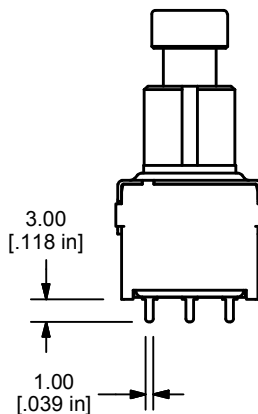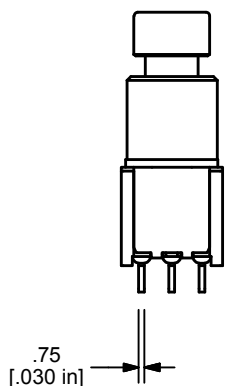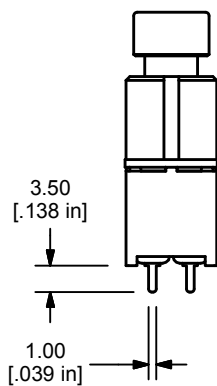

M2 TERMINAL FOR 1P OR 2P
2P SWITCH SHOWN

M2 TERMINAL FOR
3P SWITCH



E-SWITCH®

www.e-switch.com

800.867.2717

5