



SOT-23

Internal Configuration& Device Marking 内部结构与产品打标

Type 型号	BAS70-04,215-CN
Pin 管脚	
Mark 打标	74

Absolute Maximum Ratings 最大额定值





Characteristic 特性参数	Symbol 符号	Rat 额定值	Unit 单位
Peak Reverse Voltage 反向峰值电压	V_{RRM}	70	V
Reverse Work Voltage 反向工作电压	V_{RWM}		
DC Reverse Voltage 直流反向电压	V_R		
Forward Work Current 正向工作电流	$I_F(I_O)$	70	mA
Peak Forward Current 正向峰值电流	I_{FM}	100	mA
Power dissipation 耗散功率	$P_D(T_a=25^{\circ}C)$	200	mW
Thermal Resistance J-A 结到环境热阻	$R_{\theta JA}$	625	$^{\circ}C/W$
Junction and Storage Temperature 结温和储藏温度	T_J, T_{stg}	-55 to +150 $^{\circ}C$	


Electrical Characteristics 电特性

($T_A=25^{\circ}C$ unless otherwise noted 如无特殊说明, 温度为 25 $^{\circ}C$)

Characteristic 特性参数	Symbol 符号	Min 最小值	Max 最大值	Unit 单位
Reverse Breakdown Voltage 反向击穿电压($I_R=10\mu A$)	$V_{(BR)}$	70	—	V
Reverse Leakage Current 反向漏电流($V_R=50V$)	I_R	—	100	nA
Forward Voltage($I_F=1mA$) 正向电压($I_F=10mA$) ($I_F=15mA$)	V_F	—	0.41 0.75 1	V
Diode Capacitance 二极管电容($V_R=0V, f=1MHz$)	C_T	—	2	pF
Reverse Recovery Time 反向恢复时间	T_{rr}	—	5	nS

Typical Characteristic Curve 典型特性曲线

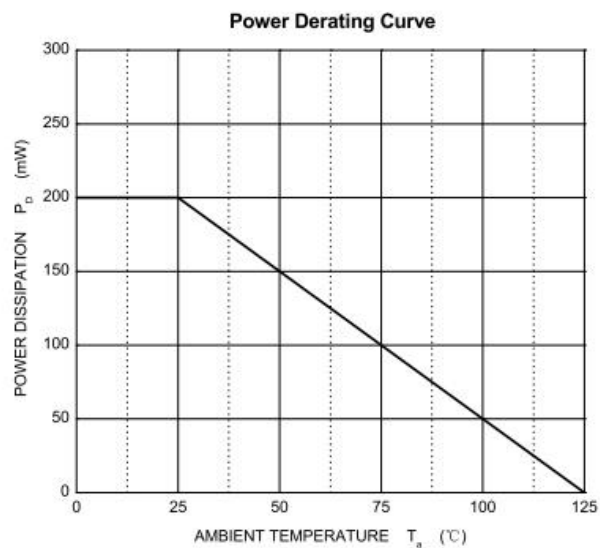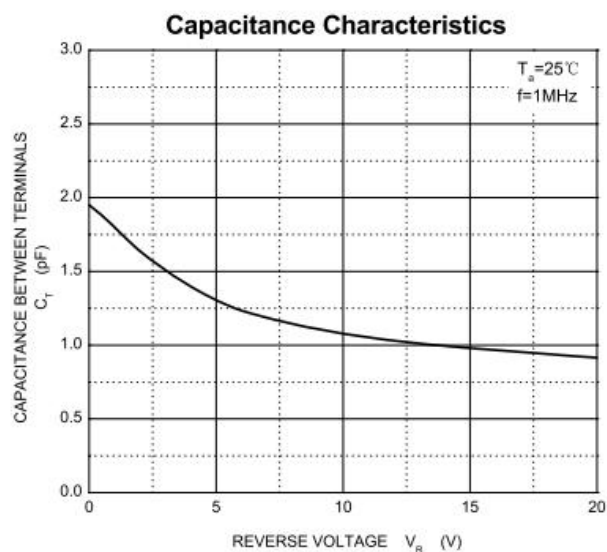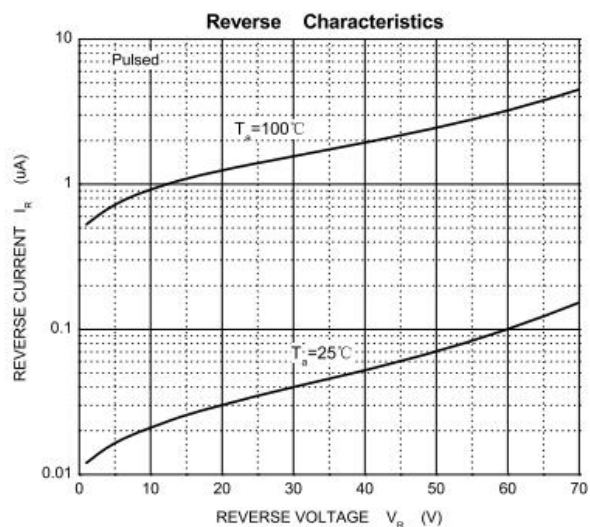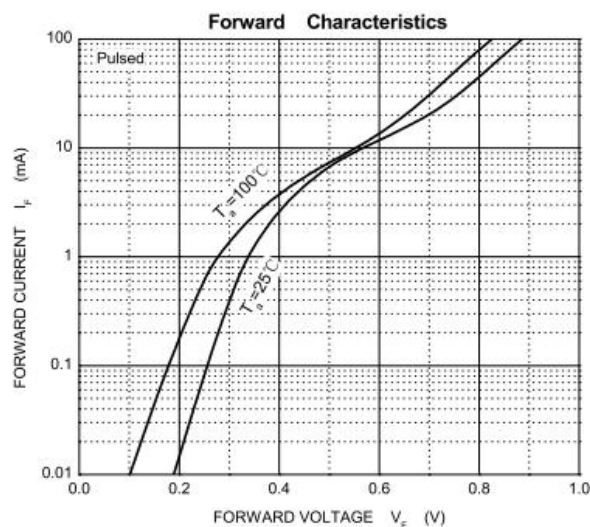

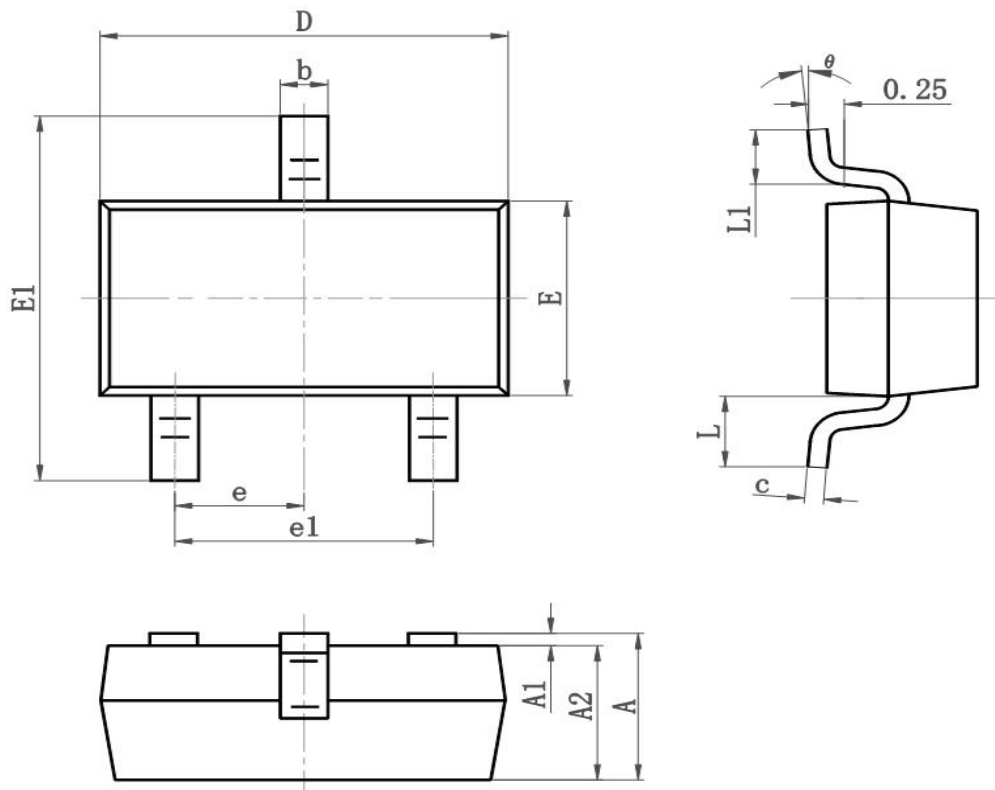Dimension 外形封装尺寸


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.050	0.055
E1	2.250	2.550	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

NOTICE

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.

本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.

此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website <http://www.chipnobo.com>, or consult your nearest Chipnobo sales office for further assistance.

欲了解更多信息，请访问我们的网站 <http://www.chipnobo.com>，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。