


Features

- ◆ Power Dissipation of 200mW
- ◆ High Stability and High Reliability
- ◆ Epoxy UL: 94V-0
- ◆ RoHS Compliant
- ◆ Pb-Free
- ◆ Halogen Free

特征

- ◆ 功耗 200mW
- ◆ 高稳定性和高可靠性
- ◆ 环氧树脂 UL 易燃等级:94V-0
- ◆ 符合 RoHS 标准
- ◆ 不含铅
- ◆ 不含卤素

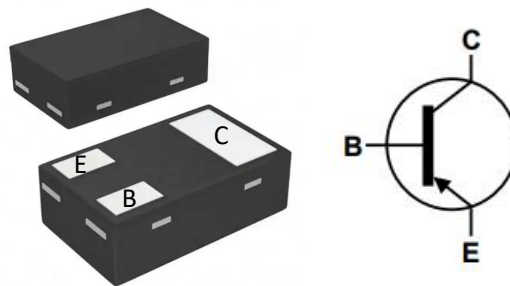

DFN1006-3L

B	BASE
E	EMITTER
C	COLLECTOR

Application 应用

- ◆ General Switching and Amplification 通用开关与放大应用
- ◆ Power management circuit 电源管理电路
- ◆ RF circuit 射频电路

MARKING CONTENT

丝印内容

Device Type 器件型号	Device Marking 器件印字
PMBT3906M,315-CN	3N

Ordering information

订购信息

Device Type 器件型号	Package 封装	Reel Size 卷盘尺寸	SPQ 标准包装量	MPQ 最小包装数量	MOQ 最小订购数量
PMBT3906M,315-CN	DFN1006-3L	7 Inch 英寸	10000/Reel	60000/Box 盒	360000/Carton 箱

1、Package 封装

Table 1__Characteristic values

表 1__特征数值

Parameter 参数	Symbol 符号	Note or test condition 注释或测试条件	Values 数值			Unit 单位
			Min. 最小	Typ. 典型	Max. 最大	
Storage temperature 储存温度	T _{stg}	/	-55	/	+150	°C
Thermal resistance, Junction-Ambient 结至环境热阻	R _{θJA}	/	/	/	600	°C/W

2、Transistor

Table 2__Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

表 2__极限参数(如无另外标识, 环境温度=25°C)

Parameter 参数	Symbol 符号	Note or test condition 注释或测试条件	Value 数值	Unit 单位
Collector-Emitter Voltage 集电极-发射极电压	V _{CEO}	/	-40	V
Collector-Base Voltage 集电极-基极电压	V _{CBO}	/	-40	V
Emitter-Base Voltage 发射极-基极电压	V _{EBO}	/	-5	V
Continuous Collector Current 连续集电极电流	I _C	/	-200	mA
Collector Power Dissipation 集电极功耗	P _C	/	200	mW
Operating junction temperature 工作结温度	T _j	/	-55~+150	°C





Table 3__Electrical Characteristic Values($T_A = 25^\circ\text{C}$, unless otherwise noted)




表 3__电气特性数值(如无另外标识, 环境温度=25°C)

Parameter 参数	Symbol 符号	Note or test condition 注释或测试条件	Limits 限值			Unit 单位
			Min.	Typ.	Max.	
Collector-emitter breakdown voltage 集电极-发射极击穿电压	V _{(BR)CEO}	I _C = -1mA I _B = 0A	-40	/	/	V
Collector-base breakdown voltage 集电极-基极击穿电压	V _{(BR)CBO}	I _C = -10uA I _E = 0A	-40	/	/	V
Emitter-base breakdown voltage 发射极-基极击穿电压	V _{(BR)EBO}	I _E = -10uA I _B = 0A	-5	/	/	V
Collector cut-off current 集电极-基极 反向饱和电流	I _{CEX}	V _{CE} = -30V V _{EB} = -3V	/	/	-50	nA
Emitter cut-off current 发射极-基极反向电流	I _{EBO}	V _{EB} = -5V I _C = 0A	/	/	-100	nA

Parameter 参数	Symbol 符号	Note or test condition 注释或测试条件	Limits 限值			Unit 单位
			Min.	Typ.	Max.	
DC current gain 直流电流增益	hFE	VCE=-1V IC=-0.1mA	60	/	/	/
		VCE=-1V IC=-1.0mA	80	/	/	
		VCE=-1V IC=-10mA	100	/	300	
		VCE=-1V IC=-50mA	60	/	/	
		VCE=-1V IC=-100mA	30	/	/	
Collector-emitter saturation voltage 集电极-发射极饱和电压	VCE(sat)	IC=-10mA IB=-1mA	/	/	-0.25	V
		IC=-50mA IB=-5mA	/	/	-0.40	
Base-emitter saturation voltage 基极-发射极间饱和电压	VBE(sat)	IC=-10mA IB=-1mA	-0.65	/	-0.85	V
		IC=-50mA IB=-5mA	/	/	-0.95	
Transition frequency 特征频率	fT	VCE=-20V IC=-10mA f=100MHz	250	/	/	MHz
Delay time 延迟时间	td	VCC =-3V VBE =-0. 5VIC =- 10mA	/	/	35	nS
Rise time 上升时间	tr		/	/	35	
Storage time 存贮时间	ts	IB1=-1mA VCC=-3V IC=-10mA, IB1=IB2=-1mA	/	/	225	nS
Fall time 下降时间	tf		/	/	75	nS
Noise Figure 噪声系数	NF	VCE=-5V IC=-100uA Rs=1.0kΩ f=1.0kHz	/	/	4	dB


3、Characteristics diagrams 特性图

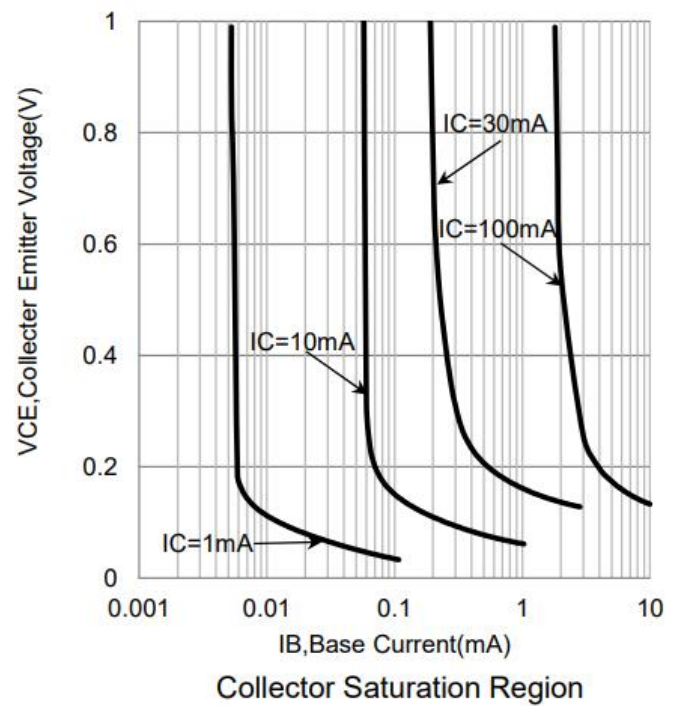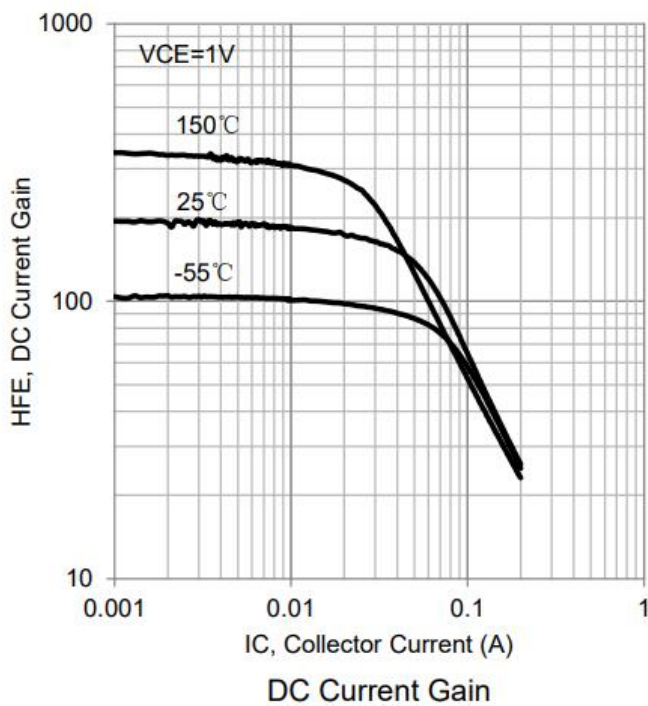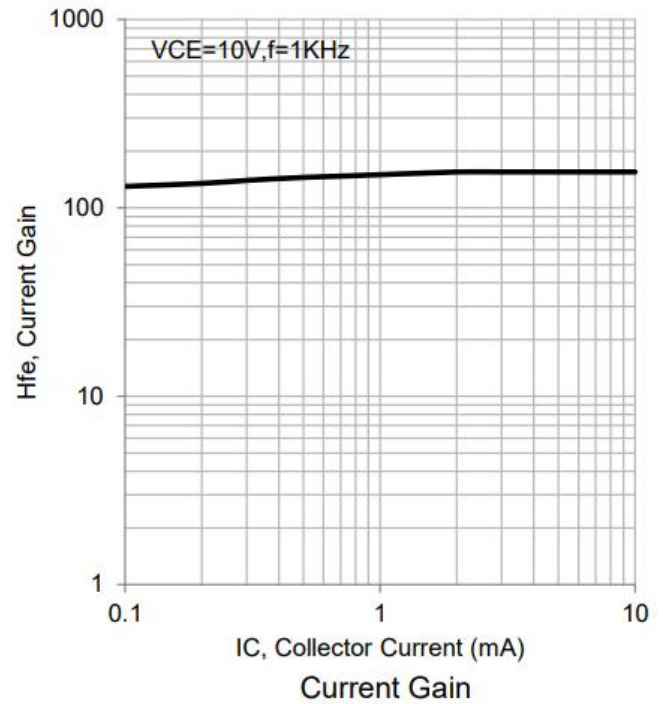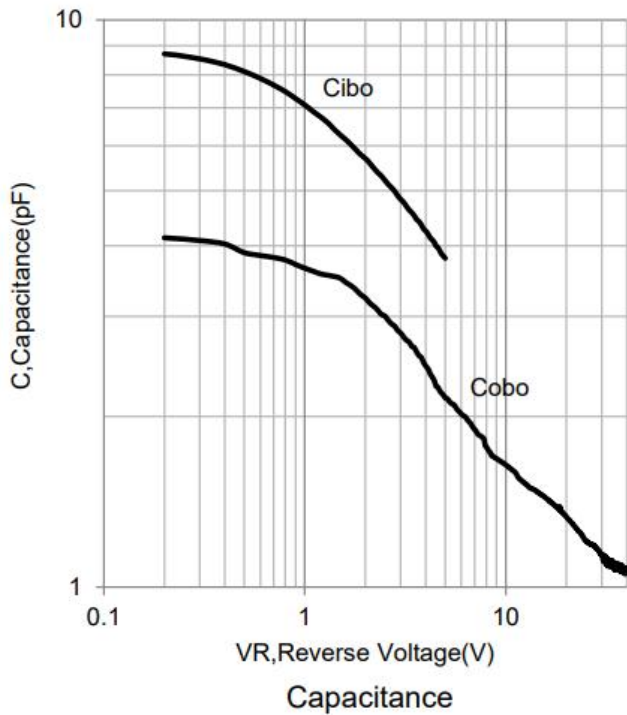

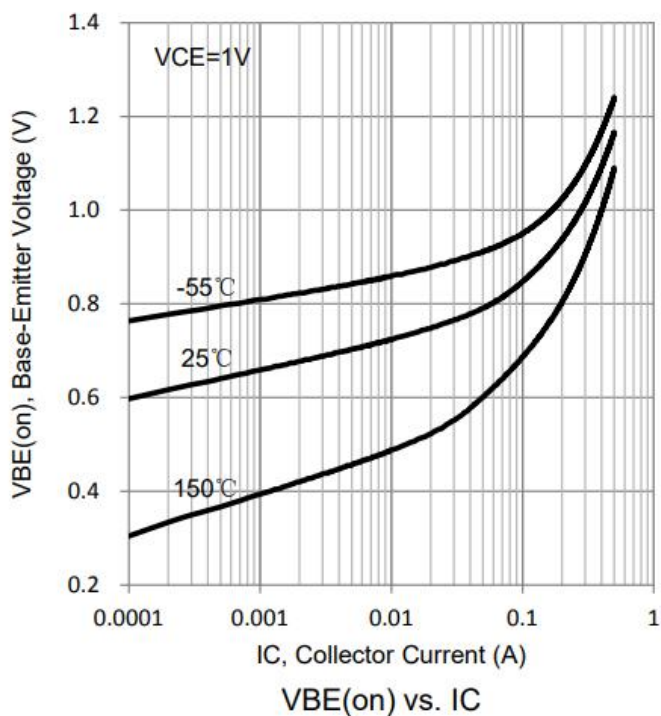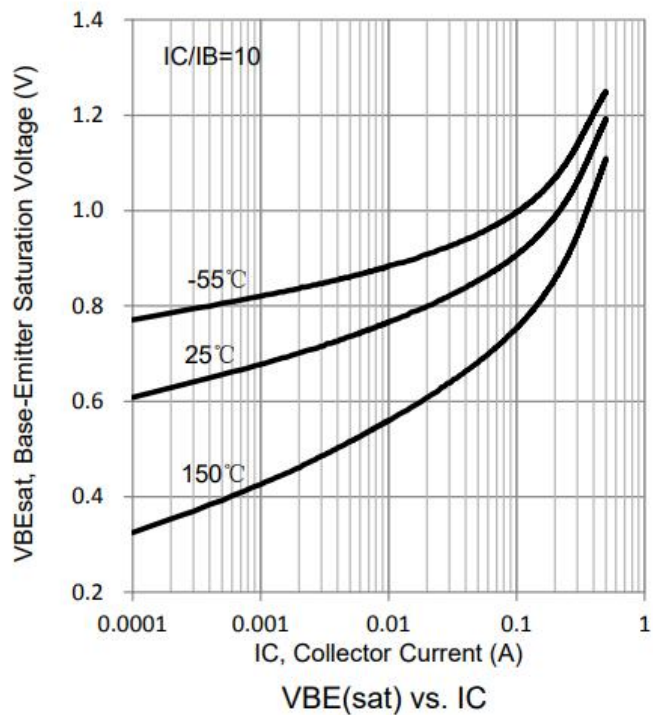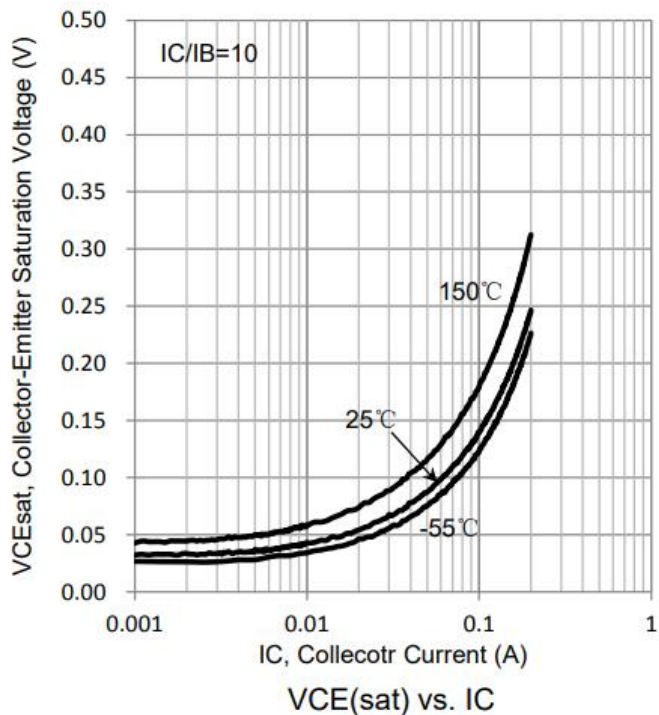

4、Package 封装信息

DFN1006-3L Package Information

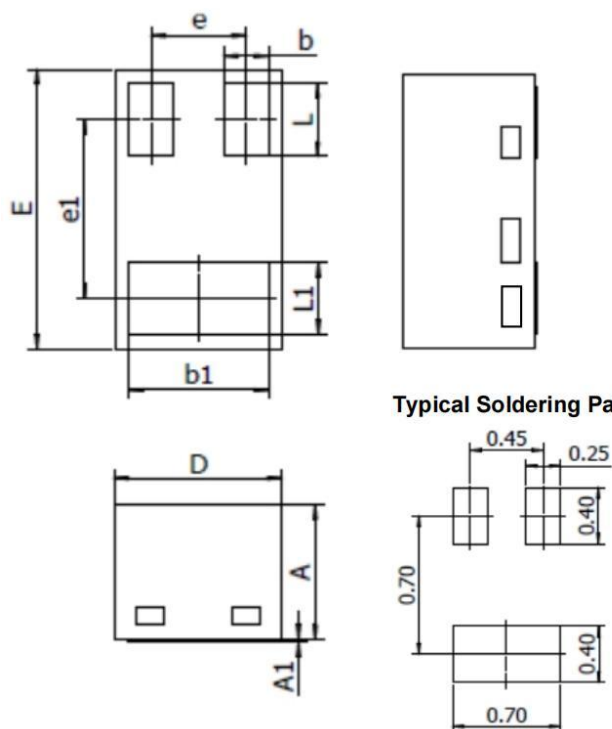

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.46	0.50	0.018	0.020
A1	---	0.03	---	0.001
D	0.55	0.65	0.022	0.026
E	0.95	1.05	0.037	0.041
b	0.12	0.22	0.005	0.008
b1	0.45	0.55	0.018	0.022
L	0.22	0.32	0.008	0.013
L1	0.22	0.32	0.008	0.013
e	Typ. 0.34		Typ. 0.013	
e1	Typ. 0.65		Typ. 0.026	

NOTICE

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.

本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.

此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website <http://www.chipnobo.com>, or consult your nearest Chipnobo sales office for further assistance.

欲了解更多信息，请访问我们的网站 <http://www.chipnobo.com>，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。