



Product Summary

- V_{DS} -30 V
- I_{DS} (at $V_{GS}=-10V$) -50A
- $R_{DS(ON)}$ (at $V_{GS}=-10V$) $\leq 9m\Omega$ (Typ)


Application

- Reverse Battery protection
- Load switch
- Power management
- PWM Application

Package and Pin Configuration

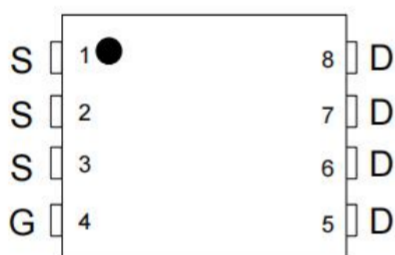

Circuit diagram



Equivalent Circuit

PDFN3X3-8

Absolute Maximum Ratings (T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNIT
Drain-Source Voltage	V_{DS}	-30	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	I_D	-50	A
		-32	
Pulsed Drain Current	I_{DM}	-200	A
Single Pulse Avalanche Energy	EAS	125	mJ
Total Power Dissipation	P_{TOT}	38	W
Operating Junction Temperature Range	T_J	-55 to +150	°C
Storage Temperature Range	T_{stg}	-55 to +150	°C

Thermal Characteristic

PARAMETER	Symbol	Value	Unit
Junction-to-Ambient Thermal Resistance	$R_{\theta JA}$	63	°C/W
Thermal Resistance Junction-Case	$R_{\theta JC}$	3.3	°C/W

Note : The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.

Electrical Characteristics (T_A=25°C unless otherwise noted)

PARAMETER	CONDITIONS	SYMBOL	MIN	TYP	MAX	UNIT
Static						
Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=-250\mu A$	BV_{DSS}	-30	--	--	V
Gate-Source Threshold Voltage	$V_{DS}=V_{GS}, I_D=-250\mu A$	$V_{GS(th)}$	-1.0	-1.5	-2.0	V
Gate-Source Leakage	$V_{DS}=0V, V_{GS}= \pm 20V$	I_{GSS}	--	--	± 100	nA
Zero Gate Voltage Drain Current	$V_{DS}= -30V, V_{GS}=0V$	I_{DSS}	--	-0.1	-1.0	μA
	$V_{DS}=-30V, T_J=55^{\circ}C$		--	-1.0	-5.0	μA
Drain-Source On-State Resistance (Note 1)	$V_{GS}= -10V, I_D= -30A$	$R_{DS(on)}$	--	9	16	m Ω
	$V_{GS}=-4.5V, I_D= -15A$		--	15	18	
Forward Trans conductance	$V_{DS}=-5V, I_D= -18A$	g_{fs}	--	25	--	S
Dynamic (Note 2)						
Total Gate Charge (Note 3)	$V_{DS}= -15V,$ $I_D= -15A,$ $V_{GS}= -4.5V$	Q_g	--	30	--	nC
Gate-Source Charge (Note 3)		Q_{gs}	--	10	--	
Gate-Drain Charge (Note 3)		Q_{gd}	--	10.4	--	
Input Capacitance	$V_{DS}= -15V,$ $V_{GS}= 0V,$ $F= 1.0MHz$	C_{iss}	--	3448	--	pF
Output Capacitance		C_{oss}	--	508	--	
Reverse Transfer Capacitance		C_{rss}	--	421	--	
Switching						
Turn-On Delay Time (Note 3)	$V_{DD}= -15V,$ $I_D= -15A,$ $V_{GS}= -10V,$ $R_G= 3.3\Omega$	$t_{d(on)}$	--	9.4	--	nS
Rise Time (Note 3)		t_r	--	10.2	--	
Turn-Off Delay Time (Note 3)		$t_{d(off)}$	--	117	--	
Fall Time (Note 3)		t_f	--	24	--	
Source-Drain Diode Ratings and Characteristics (Note 2)						
Forward Voltage	$V_{GS}= 0V, I_F= -1A$	V_{SD}	--	-0.7	-1.2	V
Continuous Source Current	Integral reverse diode in the MOSFET	I_S	--	--	-50	A
Pulsed Current (Note 1)		I_{SM}	--	--	-200	A

Notes:

1. Pulse test; pulse width ≤ 300 μS, duty cycle ≤ 2%.
2. Guaranteed by design, not subject to production testing.
3. Independent of operating temperature

Typical Performance Characteristics

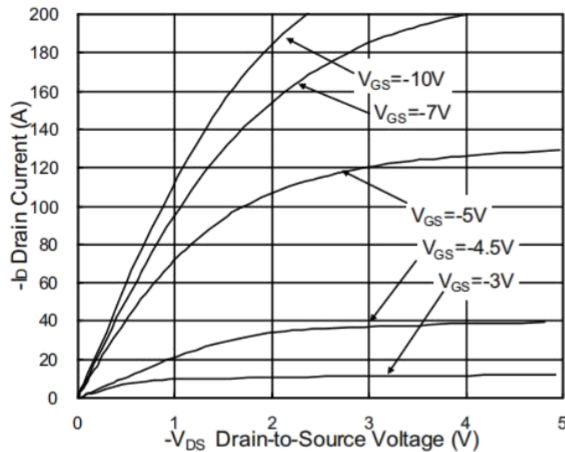


Fig.1 Typical Output Characteristics

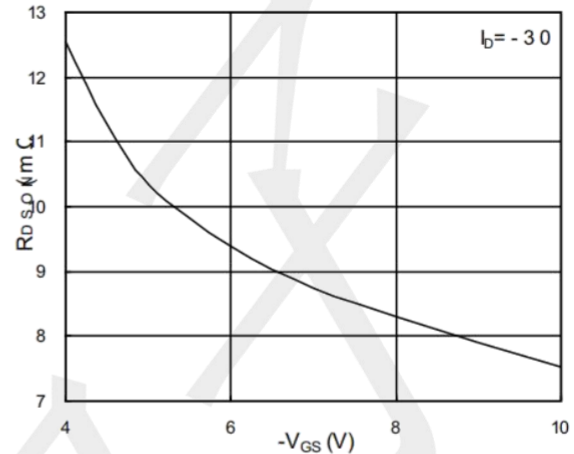


Fig.2 On-Resistance v.s Gate-Source

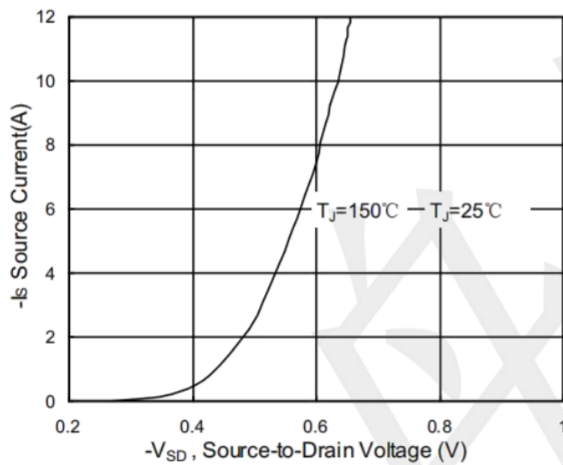


Fig.3 Forward Characteristics Of Reverse

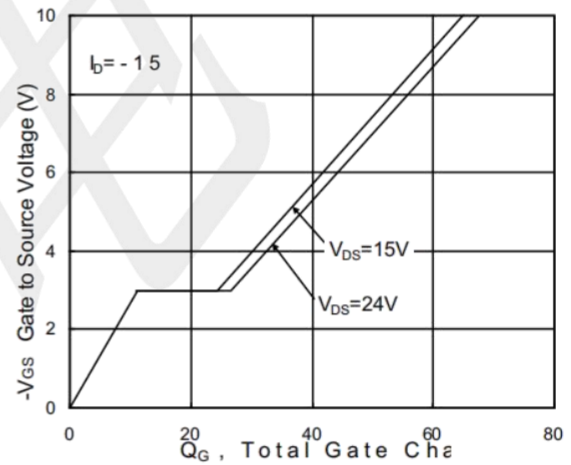


Fig.4 Gate-Charge Characteristics

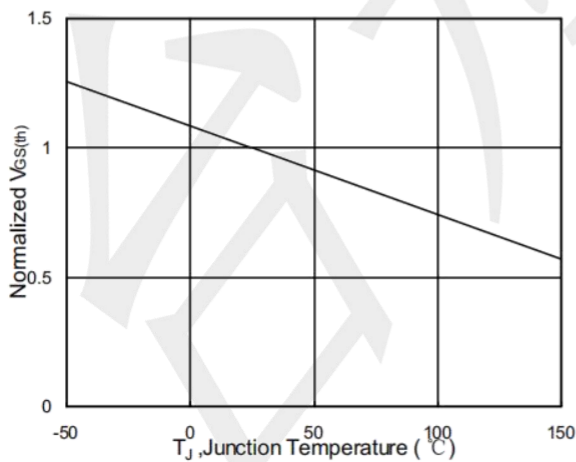


Fig.5 Normalized $V_{GS(th)}$ v.s T_J

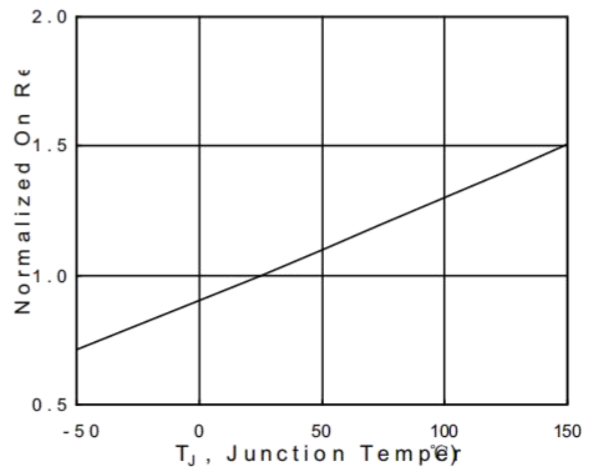


Fig.6 Normalized $R_{DS(on)}$ v.s T_J

Typical Performance Characteristics

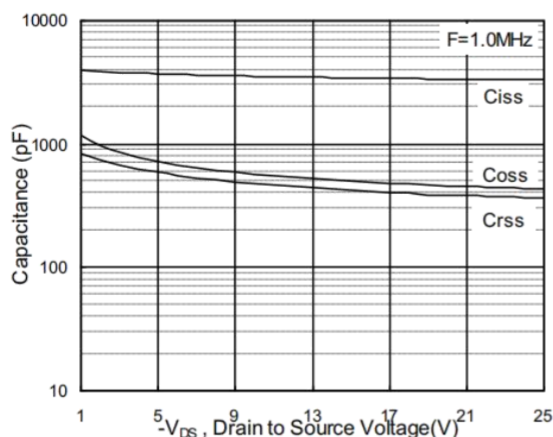


Fig.7 Capacitance

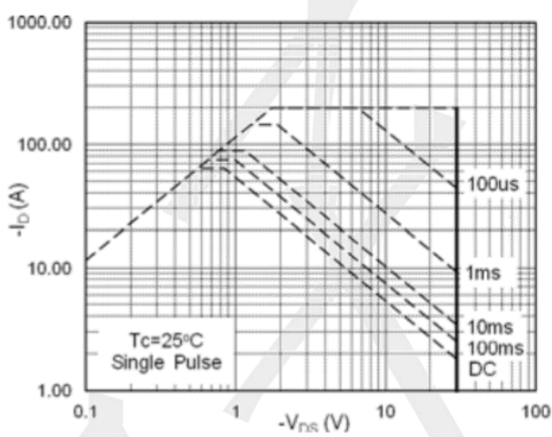


Fig.8 Safe Operating Area

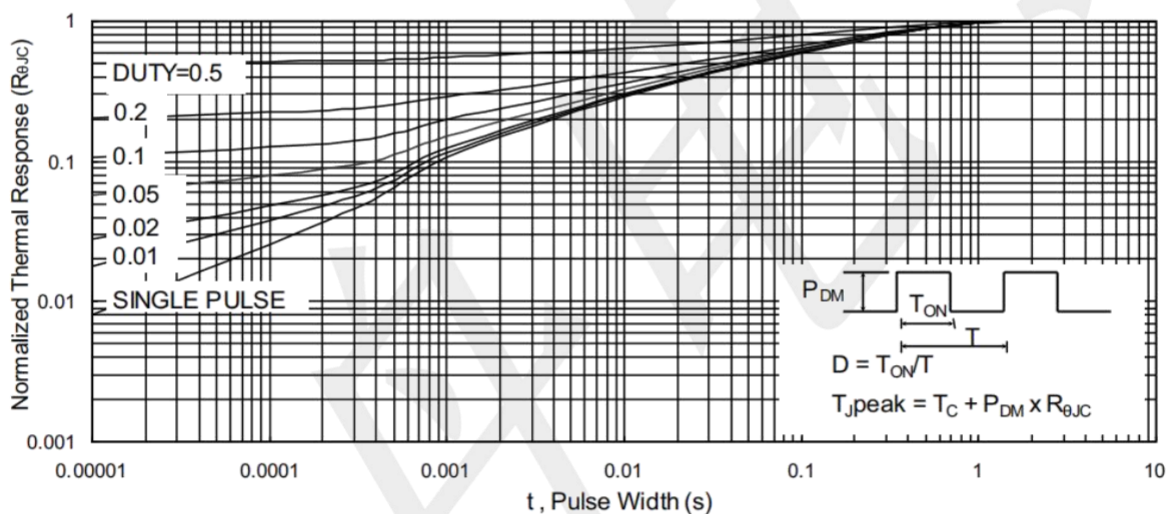


Fig.9 Normalized Maximum Transient Thermal Impedance

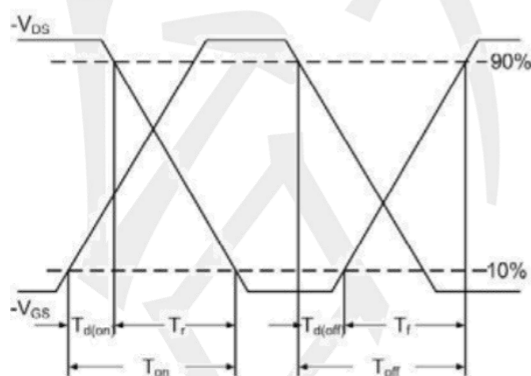


Fig.10 Switching Time Waveform


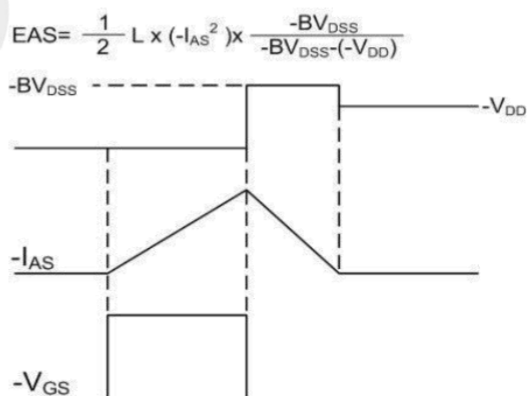


Fig.11 Unclamped Inductive Switching Waveform

Package Information

PDFN3X3-8

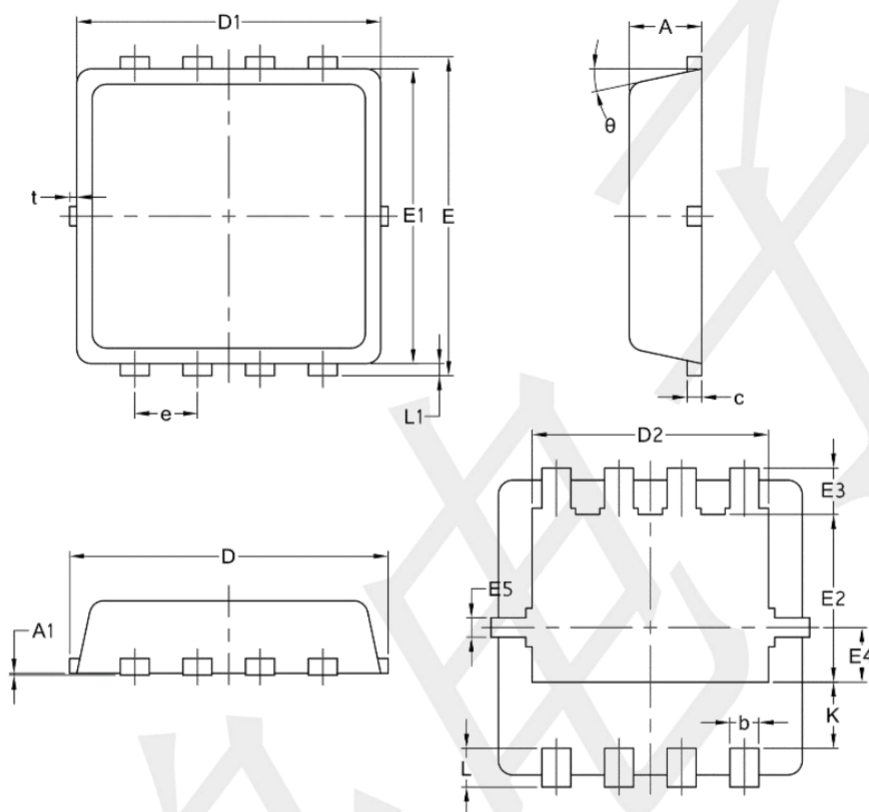

Symbol	Common		
	mm		
	Mim	Nom	Max
A	0.70	0.75	0.85
A1	/	/	0.05
b	0.20	0.30	0.40
c	0.10	0.152	0.25
D	3.15	3.30	3.45
D1	3.00	3.15	3.25
D2	2.29	2.45	2.65
E	3.15	3.30	3.45
E1	2.90	3.05	3.20
E2	1.54	1.74	1.94
E3	0.28	0.48	0.65
E4	0.37	0.57	0.77
E5	0.10	0.20	0.30
e	0.60	0.65	0.70
K	0.59	0.69	0.89
L	0.30	0.40	0.50
L1	0.06	0.125	0.20
t	0	0.075	0.13
Φ	10	12	14