

4A 4Quadrants TRIACs

Product Summary


Symbol	Value	Unit
$I_{T(AV)}$	4	A
$V_{DRM} V_{RRM}$	600/800	V
V_{TM}	1.55	V

Features

With high ability to withstand the shock loading of arge current, Provide high dv/dt rate with strong resistance to electromagnetic interference

Application

Power charger, T-tools, massager, solid staterelay, AC Motor speed regulation and so on.

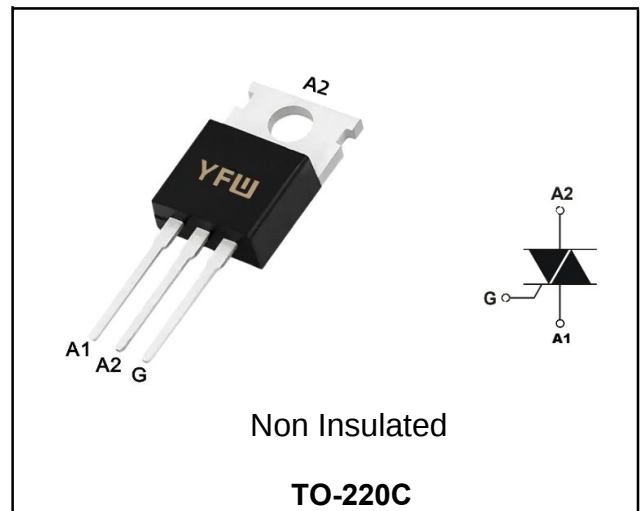

Absolute maximum ratings (Ta=25°C unless otherwise noted)

Parameter	Symbol	Value		Unit
Repetitive peak off-state voltage	V_{DRM}	600/800		V
Repetitive peak reverse voltage	V_{RRM}	600/800		V
RMS on-state current	$I_{T(RMS)}$	4		A
Non repetitive surge peak on-state current (full cycle, F=50Hz)	I_{TSM}	25		A
I^2t value for fusing (tp=10ms)	I^2t	3.1		A ² s
Critical rate of rise of on-state current ($I_G = 2 \times I_{GT}$)	di/dt	I - II - III	50	A/us
		IV	10	
Peak gate current	I_{GM}	2		A
Gate peak power	I_{GM}	5		W
Average gate power dissipation	$P_{G(AV)}$	0.5		W
Junction Temperature	T_J	-40~+150		°C
Storage Temperature	T_{STG}	-40 ~+125		°C

Electrical characteristics (TA=25°C, unless otherwise noted)

Parameter	Symbol	Test Condition		Value		Unit
				D	E	
Gate trigger current	I_{GT}	$V_D=12V$, $I_T=0.1A$, $T_j=25^{\circ}C$, Fig.6	I - II -III	≤ 5	≤ 10	mA
			IV	≤ 10	≤ 25	
Gate trigger voltage	V_{GT}		I - II -III-IV	≤ 1.3		V
Gate non-trigger voltage	V_{GD}	$V_D=V_{DRM}$, $T_j=125^{\circ}C$		≥ 0.2		V
Holding current	I_H	$V_D=12V$, $I_{GT}=0.1A$, $T_j=25^{\circ}C$, Fig.6	I - II -III-IV	≤ 10	≤ 15	mA
latching current	I_L		I -III-IV	≤ 10	≤ 15	mA
			II	≤ 15	≤ 20	mA
Critical-rate of rise of commutation voltage	dV_D/dt	$V_D=2/3V_{DRM}$, $T_j=125^{\circ}C$		≥ 10	≥ 20	V/us


STATIC CHARACTERISTICS

Forward "on" voltage	V_{TM}	$I_{TM}=6A$, $t_p=380\mu s$, Fig.4		≤ 1.55	
Repetitive Peak Off-State Current	I_{DRM}	$V_D=V_{DRM}$ $V_R=V_{RRM}$	$T_j=25^\circ C$	≤ 5	≤ 5
Repetitive Peak Reverse Current	I_{RRM}		$T_j=125^\circ C$	≤ 0.5	≤ 0.5

THERMAL RESISTANCES

Thermal resistance	$R_{th(j-c)}$	Junction to case	TYP.	2.6	$^\circ C/W$
	$R_{th(j-a)}$	Junction to ambient	TYP.	60	$^\circ C/W$

Ordering Information

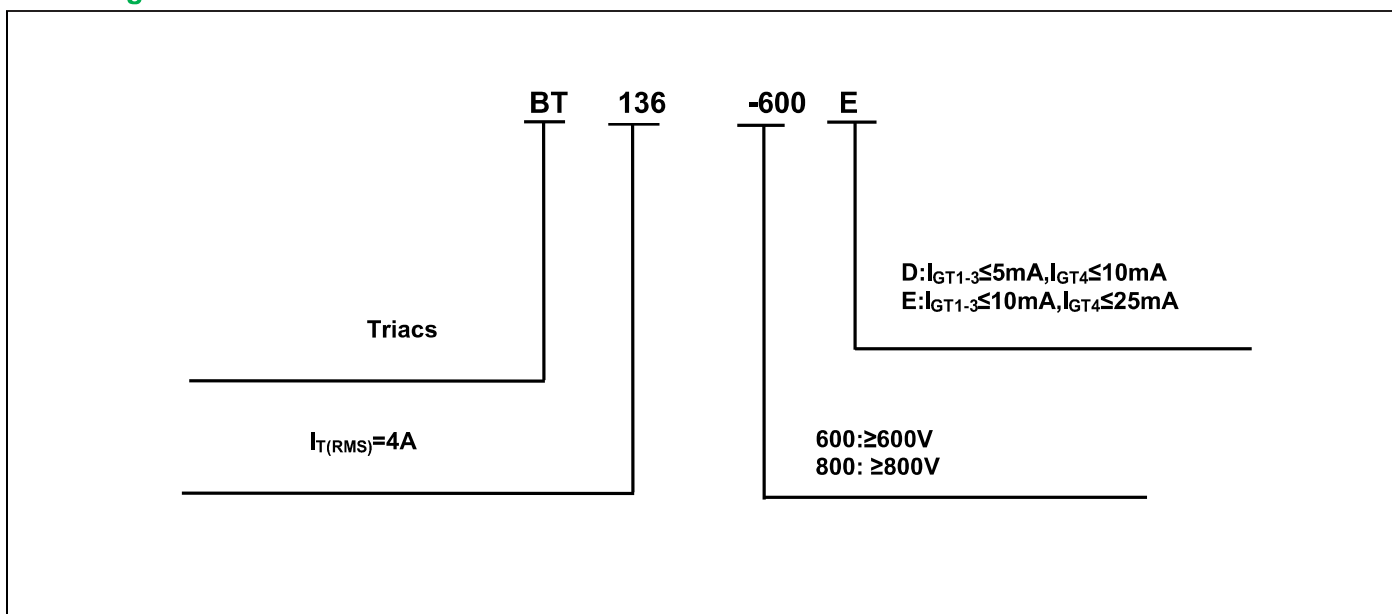

Typical Characteristics

FIG1 Maximum power dissipation versus RMS on-state current

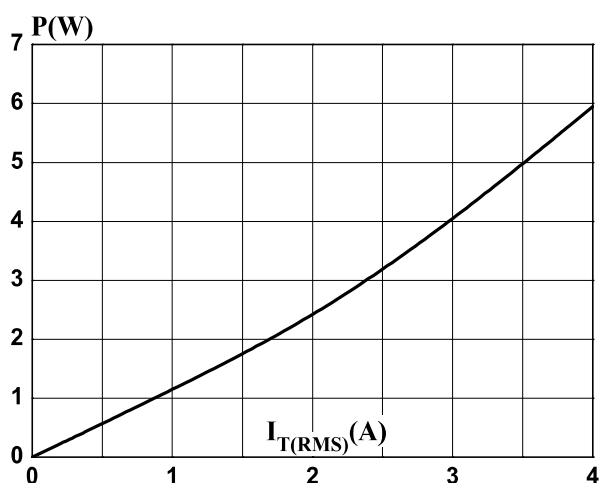


FIG2 RMS on-state current versus case temperature

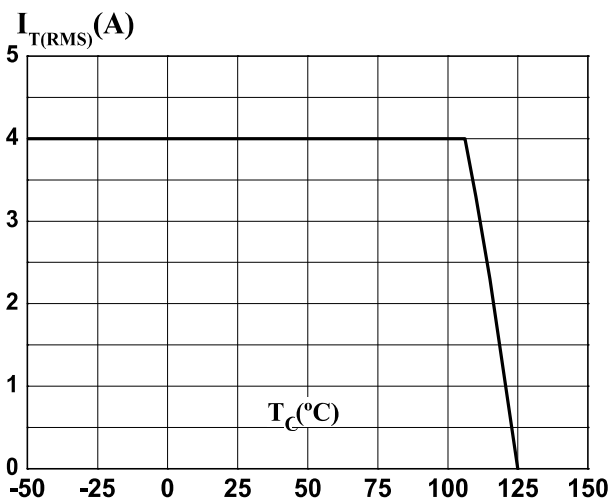


FIG3 Surge peak on-state current versus number of cycles

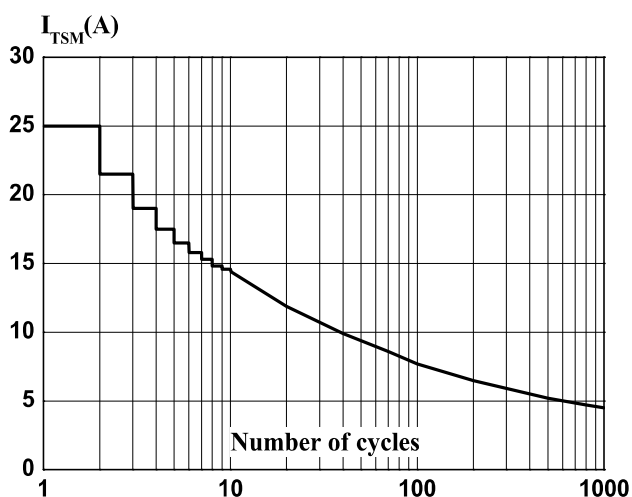


FIG5 Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 20ms$, and corresponding value of I^2t ($dI/dt < 100A/\mu s$)

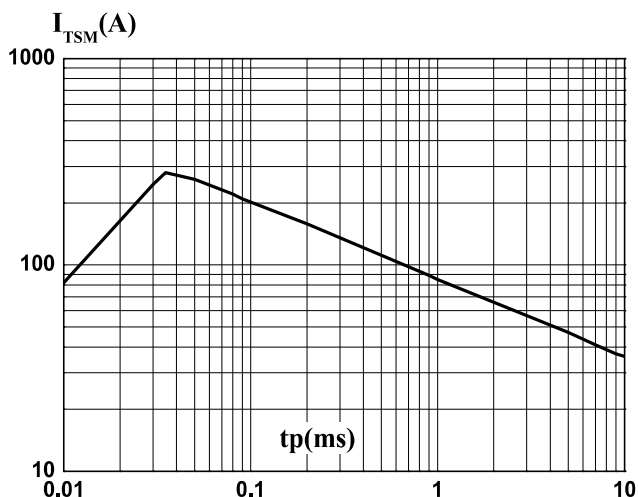


FIG4 On-state characteristics (maximum values)



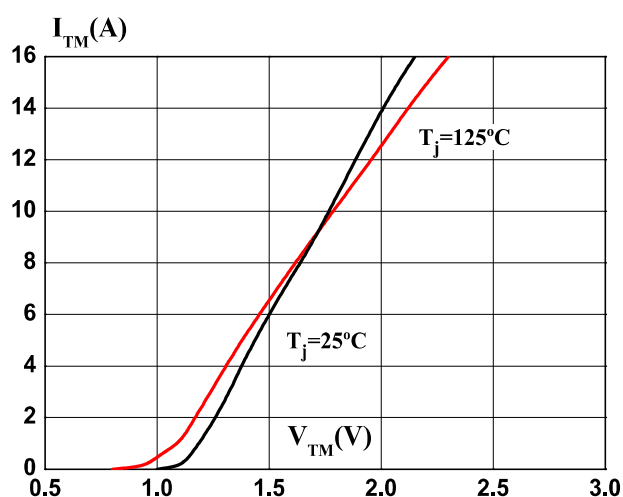


FIG6 Relative variations of gate trigger current, holding current and latching current versus junction temperature

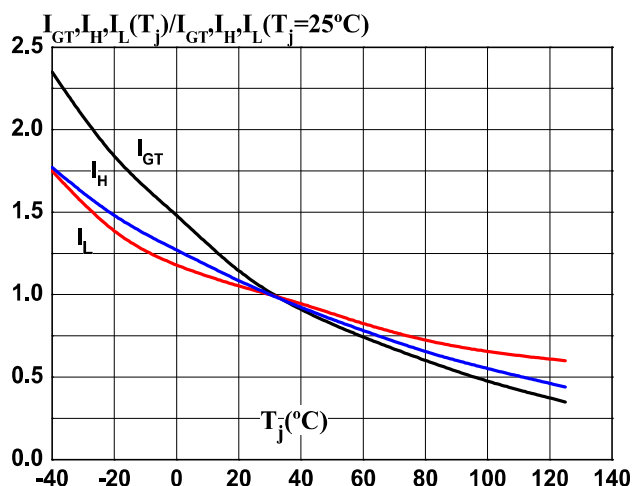

Marking Diagram

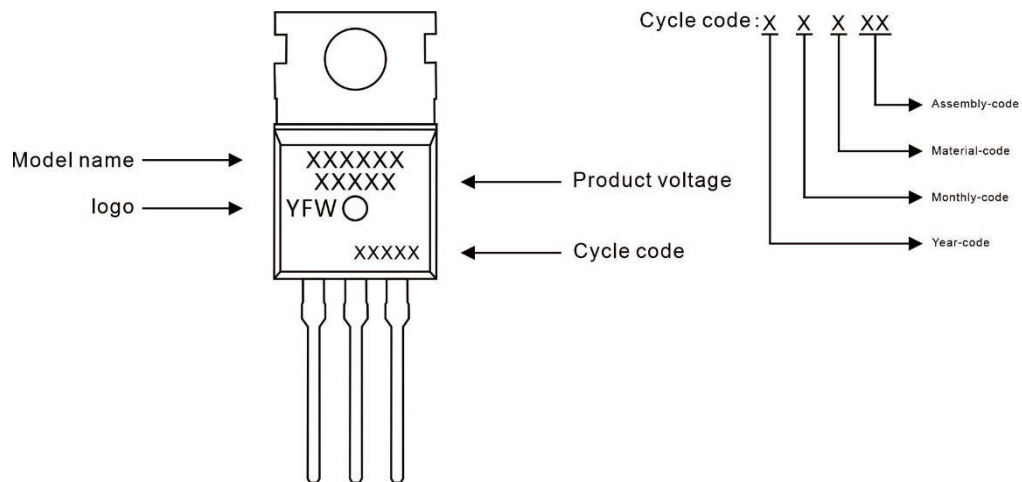

Ordering information

Model name	Package	Unit Weight	Base Quantity	Packing Quantity
BT136	TO-220C	0.07oz(1.96g)	50pcs/tube	1000PCS/Box 5000PCS/Carton

Package Dimensions

TO-220C

Symbol	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	9.70	10.40	0.382	0.409
B	6.13	6.82	0.241	0.269
C	9.00	9.40	3.54	0.37
D	0.70	0.92	0.0276	0.0362
D1	1.18	1.45	0.047	0.057
D2	1.22	1.32	0.048	0.052
E	2.34	2.74	0.092	0.108
L	15.70	16.14	0.62	0.64
L1	9.60	10.60	0.38	0.42
L2	12.60	13.60	0.50	0.54
K	2.20	2.75	0.087	0.108
T	4.30	4.71	0.169	0.185
T1	1.20	1.42	0.0472	0.056
T2	0.38	0.65	0.015	0.026
ΦR	3.55	3.78	0.14	0.15

Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.