

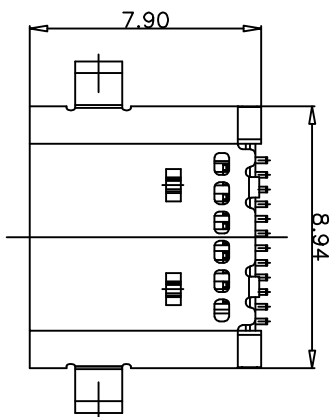
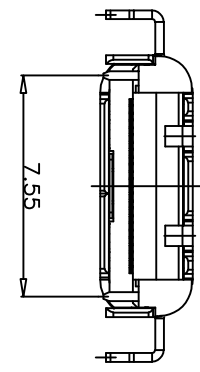

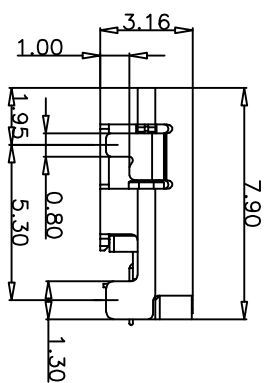
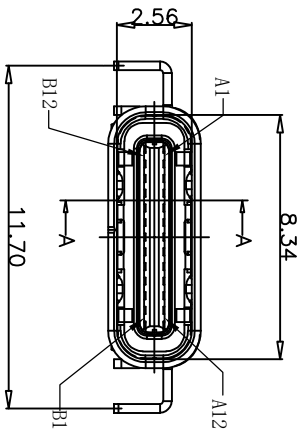


- 1: Au g/f
- 2: Au 3u"
- 4: Au 15u"
- 5: Au 30u"

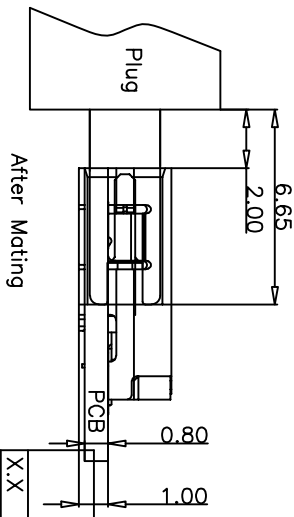


SECTION-A-A

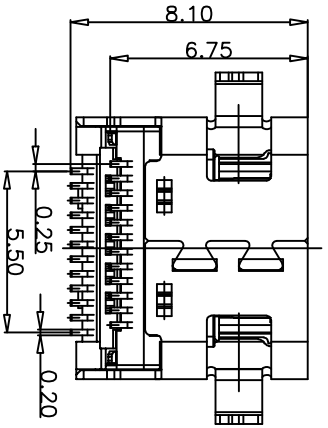

TOLERANCE		NAME(INTENDED USE) CUSTOMER DRAWING		TITLE:	
X.X	±0.30	X.X	±10°	PART NO.	CF 24P沉板1.0 40G
.XX	±0.20	.X	± 8°	DESIGN: ZXM	
.XXX	±0.10	.XX	± 5°		
UNITS	mm				
MATERILA	----				
FINISH	----				

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

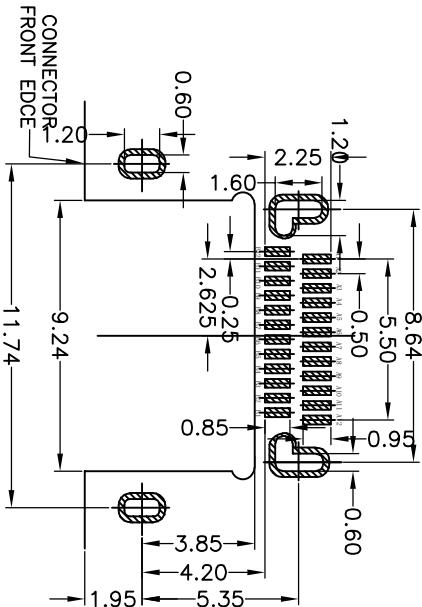



- NOTE:
- ELECTRICAL PERFORMANCE:
 - CONTACT CURRENT RATING:
 - 3.0A FOR VBUS AND GND.VOLTAGE RATING:20V MAX.
 - (ie., Pins A4,A9,B4,B9)
 - 1.25A FOR Vconn AND GND.
 - (ie., Pins B5,A1,A12,B1,B12)
 - INSULATION RESISTANCE:
 - 100MΩ MIN.AT 100VDC
 - DIELECTRIC WITHSTAND VOLTAGE:
 - 100VAC(MIN.) FOR 1 MINUTE.
 - LOW LEVEL CONTACT RESISTANCE:
 - INITIAL 40mΩ MAX.
 - AFTER 50mΩ MAX.
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE:
 - 5N~20N
 - EXTRACTION FORCE:
 - 8N~20N FROM 1 TO 1000 CYCLES
 - 6N~20N FROM 1001 TO 10000 CYCLE.
 - DURABILITY: 10000 MATING CYCLES.
 - OPERATING TEMPERATURE:
 - 30°C TO +80°C.
 - SALT SPRAY TEST:24H

USB TYPE-C FULL-FEATURED RECEPTACLE INTERFACE PIN ASSIGNMENTS



Pin	Signal Name	Description	Mating Sequence	Pin	Signal Name	Description	Mating Sequence
A1,A12 B1,B12 shell	GND	Ground return	First				
A2	SSTxp1	Positive half of first SuperSpeed TX differential pair	Second	B11	SSRxp1	Positive half of first SuperSpeed RX differential pair	Second
A3	SSTxm1	Negative half of first SuperSpeed TX differential pair	Second	B10	SSRkm1	Negative half of first SuperSpeed RX differential pair	Second
A4	Vbus	Bus Power	First	B9	Vbus	Bus Power	First
A5	CC1	Configuration Channel	Second	B8	SR02	Sideband Use (SBU)	Second
A6	Dp1	Positive half of the USB 2.0 differential pair-Position 1	Second	B7	Dm2	Negative half of the USB 2.0 differential pair-Position 2	Second
A7	Dn1	Negative half of the USB 2.0 differential pair-Position 1	Second	B6	Dp2	Positive half of the USB 2.0 differential pair-Position 2	Second
A8	SR01	Sideband Use(SBU)	Second	B5	CC2	Configuration Channel	Second
A9	Vbus	Bus Power	First	B4	Vbus	Bus Power	First
A10	SSRkm2	Negative half of second SuperSpeed RX differential pair	Second	B3	SSTxm2	Negative half of second SuperSpeed TX differential pair	Second
A11	SSRkp2	Positive half of second SuperSpeed RX differential pair	Second	B2	SSTxp2	Positive half of second SuperSpeed TX differential pair	Second

TOLERANCE		NAME(INTENDED USE) CUSTOMER DRAWING		TITLE: CF 24P沉板1.0 40G	
X.X	±0.30 X' ±10'	PART NO.	F723-68TC24F279-10-40	DRAWG NO. F723-68TC24F279-10-40	
.XX	±0.20 .X' ± 8'				
.XXX	±0.10 .XX' ± 5'				
UNITS	mm	DESIGN:	ZXM		
MATERILA	----	CHED:			
FINISH	-----	APPD:		SCALE	SHEET REV.
				1:1	1/2 A

一：包裝開始，載帶及蓋帶需預留27PCS空口袋，並用膠帶將其貼緊於REEL軸心；
將成品接地片朝下，方向一致，依次放入口袋。載帶不能有斷帶；如圖所示：

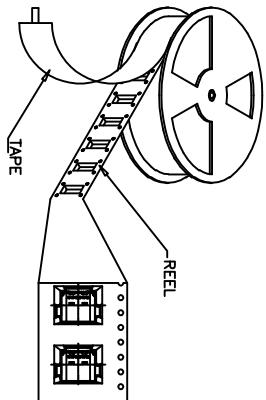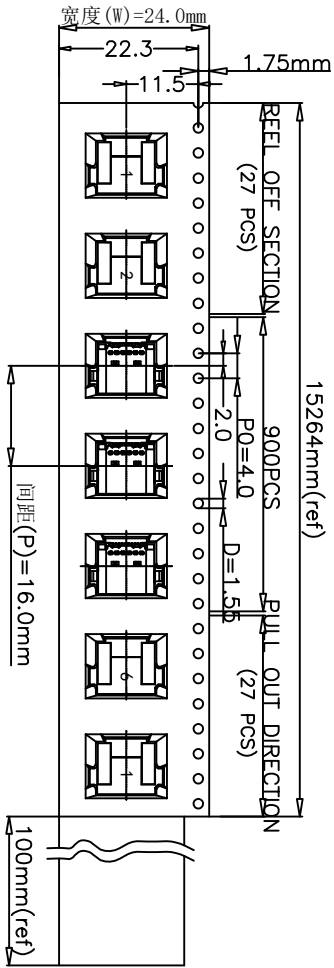

二：蓋帶的長度須比載帶CARRIER至少長100mm，且用膠紙固定在載帶上；
叶轮正面貼成品物料标签及环保标签，盖带剥落力10克-71.5克；

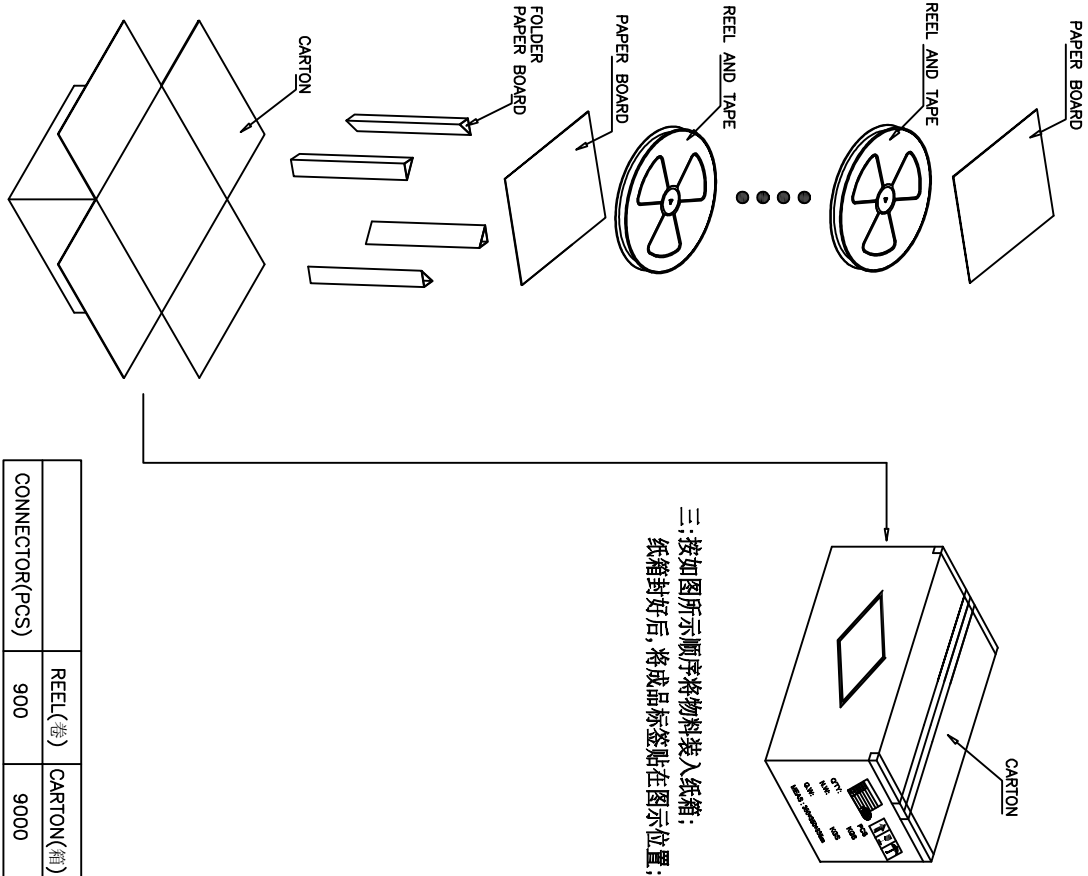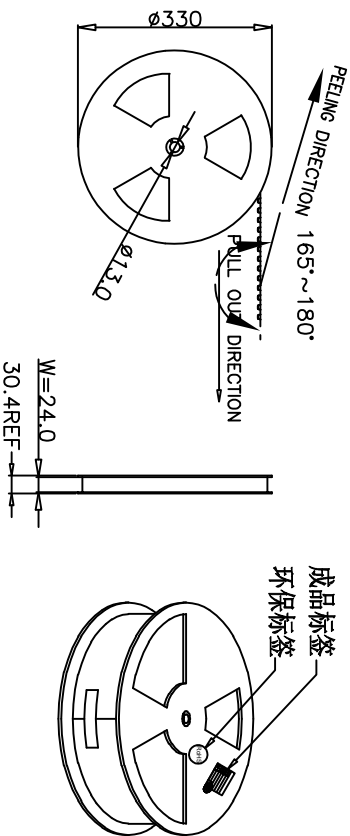

三：按如图所示顺序将物料装入纸箱；
纸箱封好后，将成品标签贴在图示位置；

CONNECTOR(PCS)	900	CARTON(箱)	9000
----------------	-----	-----------	------

TOLERANCE		NAME(INTENDED USE)		TITLE:	
X.X	±0.30 X' ±10'	CUSTOMER DRAWING		CF 24P沉板1.0 40G	
.XX	±0.20 .X' ±8'	PART NO.		F723-68TC24F79-10-40	
.XXX	±0.10 .XX' ±5'	DESIGN: ZXM		DRAWG NO. F723-68TC24F79-10-40	
UNITS	mm	CHED:		SCALE SHEET REV.	
MATERILA	----	APPD:		1:1 1/2 A	
FINISH	-----				