

Product Summary

- V_{DS} -40 V
- I_{DS} (at $V_{GS}=-10V$) -40A
- $R_{DS(ON)}$ (at $V_{GS}=-10V$) $\leq 10m\Omega$ (TYP)

Application


- Reverse Battery protection
- Load switch
- Power management
- PWM Application

Package and Pin Configuration



PDFN5X6-8

Circuit diagram



Equivalent Circuit

Absolute Maximum Ratings (T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNIT
Drain-Source Voltage	V_{DS}	-40	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	I_D	-40	A
		-26	
Pulsed Drain Current	I_{DM}	-160	A
Single Pulse Avalanche Energy	EAS	144	mJ
Total Power Dissipation	P_{DTOT}	41.6	W
Operating Junction Temperature Range	T_J	-55 to +150	°C
Storage Temperature Range	T_{stg}	-55 to +150	°C

Thermal Characteristic

Note : The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.

PARAMETER	Symbol	Value	Unit
Junction-to-Ambient Thermal Resistance	$R_{\theta JA}$	52	°C/W
Thermal Resistance Junction-Case	$R_{\theta JC}$	3.6	°C/W

Electrical Characteristics (T_A=25°C unless otherwise noted)

PARAMETER	CONDITIONS	SYMBOL	MIN	TYP	MAX	UNIT
Static						
Drain-Source Breakdown Voltage	$V_{GS}=0V, I_D=-250\mu A$	BV_{DSS}	-40	--	--	V
Gate-Source Threshold Voltage	$V_{DS}=V_{GS}, I_D=-250\mu A$	$V_{GS(th)}$	-1.0	-1.6	-2.5	V
Gate-Source Leakage	$V_{DS}=0V, V_{GS}= \pm 20V$	I_{GSS}	--	--	± 100	nA
Zero Gate Voltage Drain Current	$V_{DS}= -40V, V_{GS}=0V$	I_{DSS}	--	-0.1	-1.0	μA
	$V_{DS}=-40V, T_J=55^{\circ}C$		--	-1.0	-5.0	μA
Drain-Source On-State Resistance (Note 1)	$V_{GS}= -10V, I_D= -20A$	$R_{DS(on)}$	--	10	13	m Ω
	$V_{GS}=-4.5V, I_D= -10A$		--	15	22	
Gate Resistance	$V_{DS}=0V, V_{GS}=0V, f=1MHz$	R_g	--	2.1	--	Ω
Dynamic (Note 2)						
Total Gate Charge (Note 3)	$V_{DS}= -20V, I_D= -20A, V_{GS}= -10V$	Q_g	--	42	--	nC
Gate-Source Charge (Note 3)		Q_{gs}	--	7.3	--	
Gate-Drain Charge (Note 3)		Q_{gd}	--	8.5	--	
Input Capacitance	$V_{DS}= -20V, V_{GS}= 0V, F= 1.0MHz$	C_{iss}	--	2700	--	pF
Output Capacitance		C_{oss}	--	350	--	
Reverse Transfer Capacitance		C_{rss}	--	265	--	
Switching						
Turn-On Delay Time (Note 3)	$V_{DD}= -20V, I_D= -20A, V_{GS}= -10V, R_G= 3.3\Omega$	$t_{d(on)}$	--	10	--	nS
Rise Time (Note 3)		t_r	--	21	--	
Turn-Off Delay Time (Note 3)		$t_{d(off)}$	--	53	--	
Fall Time (Note 3)		t_f	--	29	--	
Source-Drain Diode Ratings and Characteristics (Note 2)						
Forward Voltage	$V_{GS}= 0V, I_F= -1A$	V_{SD}	--	-0.7	-1.2	V
Continuous Source Current	Integral reverse diode in the MOSFET	I_S	--	--	-40	A
Pulsed Current (Note 1)		I_{SM}	--	--	-160	A

Notes:

1. Pulse test; pulse width ≤ 300 μS, duty cycle ≤ 2%.
2. Guaranteed by design, not subject to production testing.
3. Independent of operating temperature

Typical Electrical and Thermal Characteristics (Curves)

Figure 1: Output Characteristics

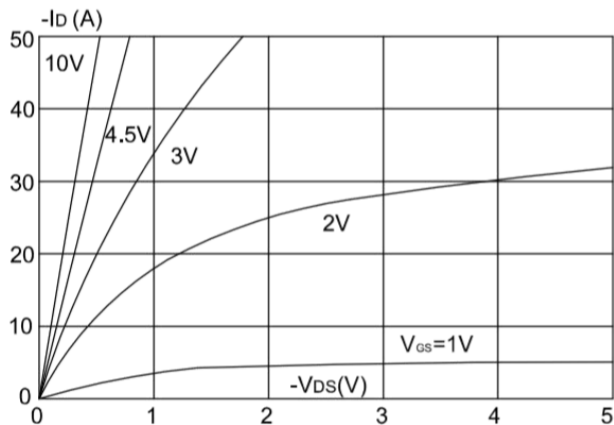


Figure 2: Typical Transfer Characteristics

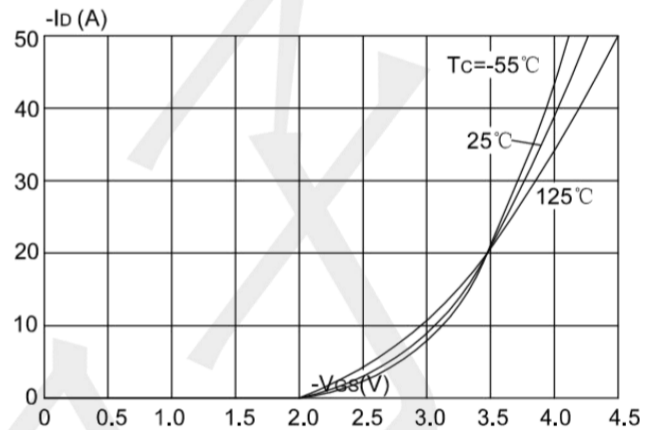


Figure 3: On-resistance vs. Drain Current

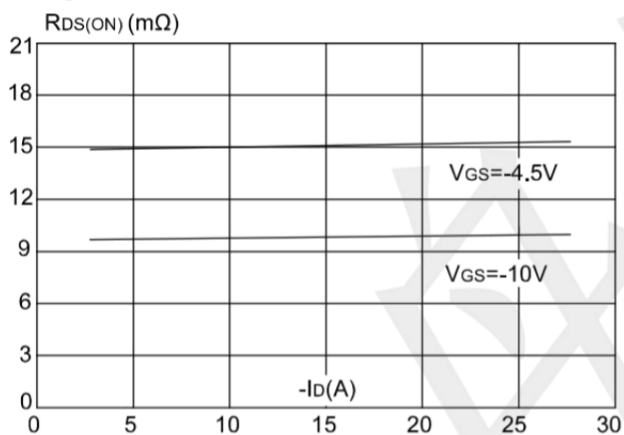


Figure 4: Body Diode Characteristics

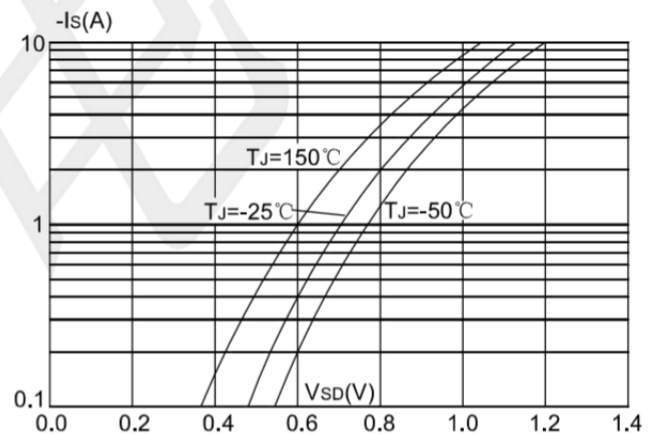


Figure 5: Gate Charge Characteristics


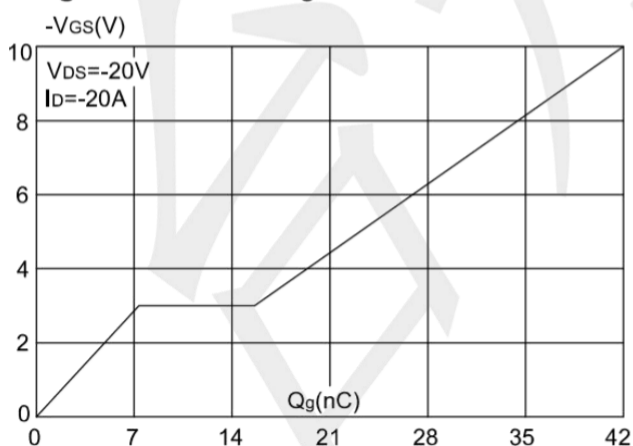


Figure 6: Capacitance Characteristics

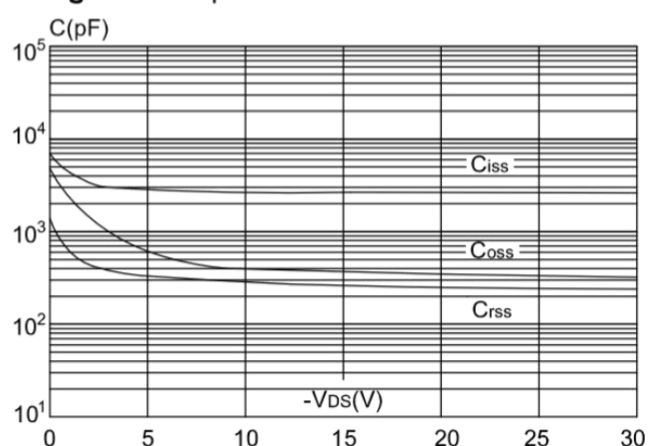

Typical Performance Characteristics

Figure 7: Normalized Breakdown Voltage vs. Junction Temperature

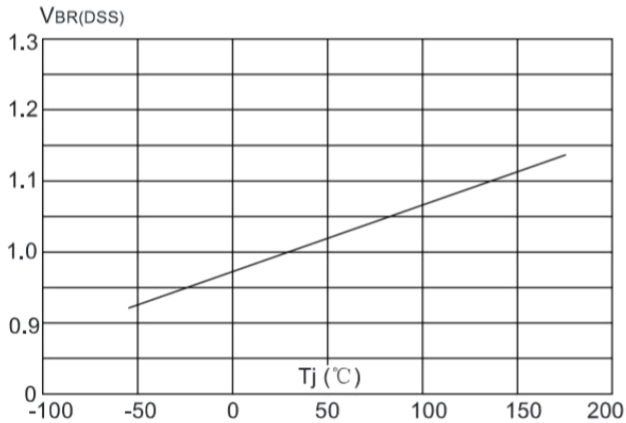


Figure 8: Normalized on Resistance vs. Junction Temperature

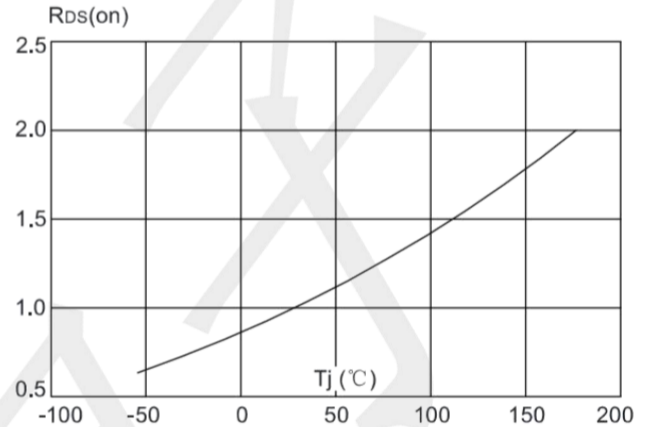


Figure 9: Maximum Safe Operating Area

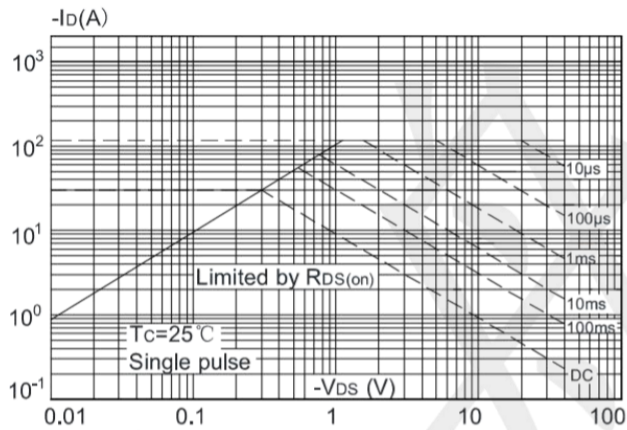


Figure 10: Maximum Continuous Drain Current vs. Case Temperature



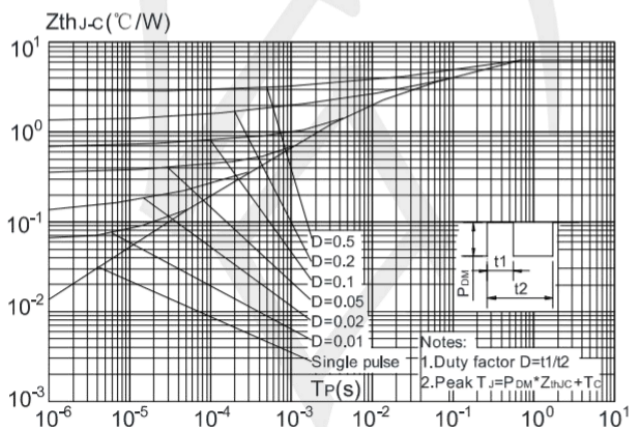


Figure.11: Maximum Effective Transient Thermal Impedance, Junction-to-Case

Package Information

PDFN5X6-8

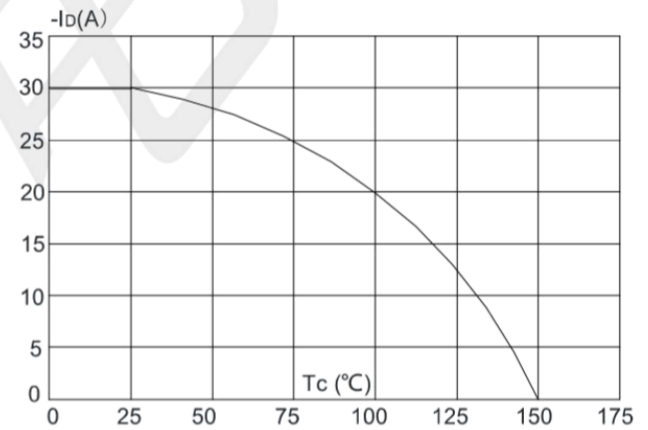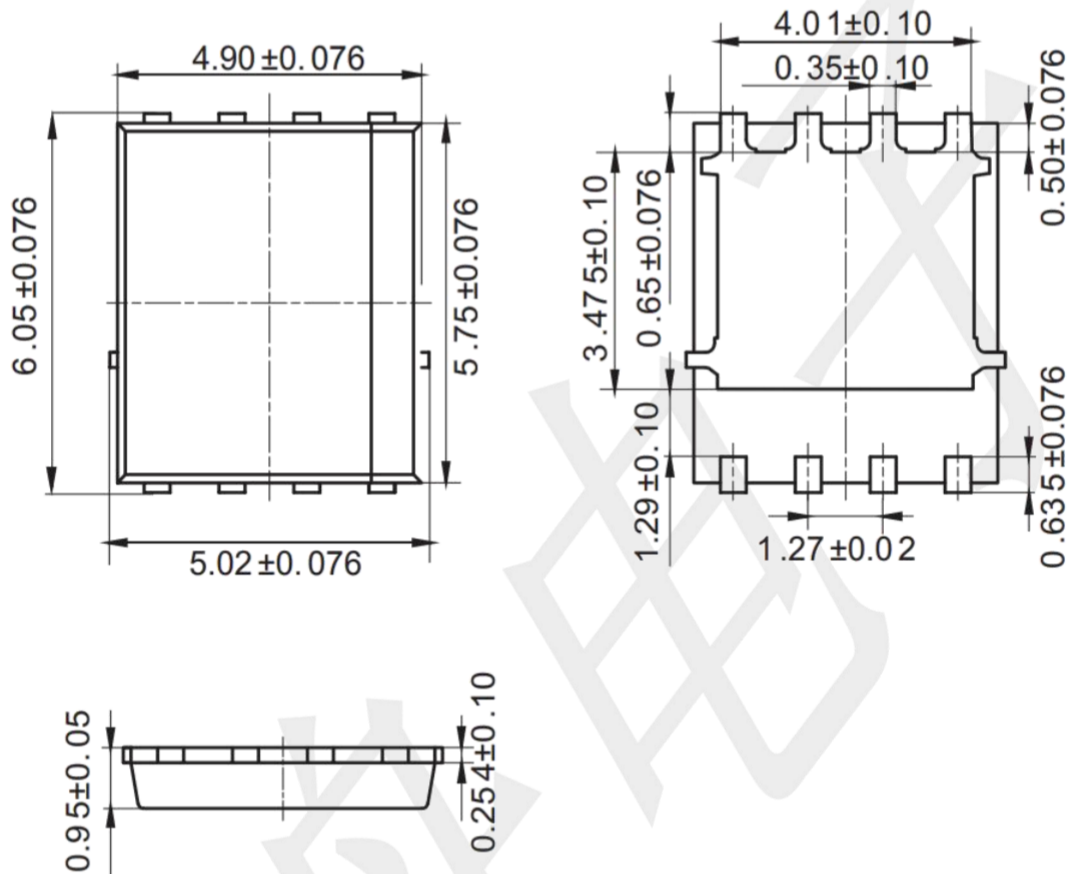

Mounting Pad Layout (unit: mm)

