

Features

- Wide supply voltage range from 0.8V to 3.6V
- Inputs accept voltages up to 3.6V
- I_{OFF} supports partial-power-down mode
- Low static power consumption; $I_{CC}=0.5\mu A$ (Max.)
- ESD Protection Exceeds JESD 22
 -2000-V Human-Body Model (A114-A)
 -200-V Machine Model (A115-A)
 -1000-V Charged-Device Model (C101)


General Description

The SN74AUP2G17DCKR-TP provides the dual non-inverting buffer with open-drain output. The output of the device is an open drain and can be connected to other open-drain outputs to implement active-LOW wire-OR active-HIGH wire-AND functions.

Ordering Information

ORDER NUMBER	PACKAGE DESCRIPTION	PACKAGE OPTION
SN74AUP2G17DCKR-TP	SOT363	Tape and Reel,3000

Pin Configuration (TOP VIEW)

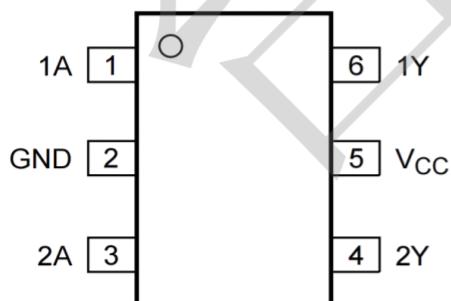


SOT363

Applications

- AV Receiver
- Audio Dock:Portable
- Blu-ray Player and Home Theater
- Embedded PC
- Personal Digital Assistant(PDA)
- Power:Telecom/Server AC/DC Supply:Single Controller:Analog and Digital
- Solid State Drive(SSD):Client and Enterprise
- Wireless Headset,Keyboard, and Mouse

Logic Diagram

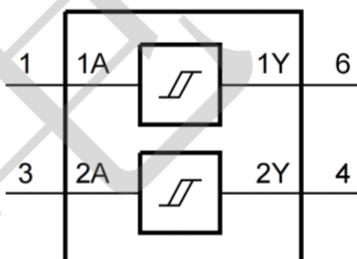

Function Table

INPUT(nA)	OUTPUT(nY)
L	L
H	H

Note:H: HIGH voltage level;L: LOW voltage level.

Absolute Maximum Ratings

PARAMETER	SYMBOL	CONDITIONS	RATINGS	UNIT
Supply Voltage	V _{CC}		-0.5 ~ +4.6	V
Input Voltage	V _{IN}		-0.5 ~ +4.6	V
Output Voltage	V _{OUT}	Output in the high or low state	-0.5 ~ +V _{CC} +0.5V	V
		Output in the power-off state	-0.5 ~ +4.6	V
VCC or GND Current	I _{CC}		±50	mA
Continuous Output Current	I _{OUT}	V _{OUT} =0~V _{CC}	±20	mA
Input Clamp Current	I _{IK}	V _{IN} <0	-50	mA
Output Clamp Current	I _{OK}	V _{OUT} <0	-50	mA
Storage Temperature Range	T _{TSG}		-65 ~ +150	°C
Junction to Ambient	θ _{JA}	SOT363	280	°C/W

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

Recommended Operating Conditions

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V _{CC}	Operating	0.8	--	3.6	V
Input Voltage	V _{IN}		0	--	3.6	V
Output Voltage	V _{OUT}	High or low state	0	--	3.6	V
Input Transition Rise or Fall Rate	Δt/Δv	V _{CC} =0.8V ~ 3.6V	--	--	200	ns/V
Operating Temperature	T _A		-40	--	+125	°C

Electrical Characteristics ($T_A=25^\circ C$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High-level Input Voltage	V_{IH}	$V_{CC}=0.8V$	0.7× V_{CC}	--	--	V
		$V_{CC}=0.9V \sim 1.95V$	0.65× V_{CC}	--	--	V
		$V_{CC}=2.3V \sim 2.7V$	1.6	--	--	V
		$V_{CC}=3V \sim 3.6V$	2	--	--	V
Low-level Input Voltage	V_{IL}	$V_{CC}=0.8V$	--	--	0.3× V_{CC}	V
		$V_{CC}=1.1V \sim 1.95V$	--	--	0.35× V_{CC}	V
		$V_{CC}=2.3V \sim 2.7V$	--	--	0.7	V
		$V_{CC}=3V \sim 3.6V$	--	--	0.9	V
Low-Level Output Voltage	V_{OL}	$V_{CC}=0.8 \sim 3.6V, I_{OL}=20\mu A$	--	--	0.1	V
		$V_{CC}=1.1V, I_{OL}=1.1mA$	--	--	0.3× V_{CC}	V
		$V_{CC}=1.4V, I_{OL}=1.7mA$	--	--	0.31	V
		$V_{CC}=1.65V, I_{OL}=1.9mA$	--	--	0.31	V
		$V_{CC}=2.3V$ $I_{OL}=2.3mA$	--	--	0.31	V
		$I_{OL}=3.1mA$	--	--	0.44	V
		$V_{CC}=3V$ $I_{OL}=2.7mA$	--	--	0.31	V
		$I_{OL}=4mA$	--	--	0.44	V
Input Leakage Current	$I_{I(LEAK)}$	$V_{CC}=0 \sim 3.6V, V_{IN}=GND \sim 3.6V$	--	--	± 0.1	μA
Power OFF Leakage Current	I_{off}	$V_{CC}=0 V, V_{IN}$ or $V_{OUT}=0 \sim 3.6V$	--	--	± 0.2	μA
Additional Power OFF Leakage Current	ΔI_{off}	$V_{CC}=0 V \sim 0.2V, V_{IN}$ or $V_{OUT}=0 \sim 3.6V$	--	--	± 0.2	μA
Quiescent Supply Current	I_{CC}	$V_{CC}=0.8 \sim 3.6V, V_{IN}=V_{CC}$ or $GND, I_{OUT}=0$	--	--	0.5	μA
Additional Quiescent Supply Current Per Input Pin	ΔI_{CC}	$V_{CC}=3.3 V, V_{IN}=V_{CC}-0.6V, I_{OUT}=0$	--	--	40	μA
Input Capacitance	C_I	$V_{CC}=0V-3.6V, V_{IN}=V_{CC}$ or GND	--	1.1	--	pF
Output Capacitance	C_{OUT}	$V_{CC}=0V, V_{OUT}=GND$	--	1.7	--	pF


OPERATING CHARACTERISTICS (f=10MHz, TA =25°C , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	C _{PD}	V _{CC} =0.8V	--	2.5	--	pF
		V _{CC} =1.2±0.1V	--	2.7	--	pF
		V _{CC} =1.5±0.1V	--	2.8	--	pF
		V _{CC} =1.8±0.15V	--	3.0	--	pF
		V _{CC} =2.5±0.2V	--	3.5	--	pF
		V _{CC} =3.3±0.3V	--	4.0	--	pF

SWITCHING CHARACTERISTICS (TA =25°C, unless otherwise specified)



PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation delay from inputs (A) to output(Y)	t _{PD}	CL=5pF, RL=5KΩ V _{CC} =0.8V	--	19	--	ns
		V _{CC} =1.2V±0.1V	2.6	5.7	--	ns
		V _{CC} =1.5V±0.1V	2.4	4.2	--	ns
		V _{CC} =1.8V±0.15V	2.0	3.6	--	ns
		V _{CC} =2.5V±0.2V	1.9	3.0	--	ns
		V _{CC} =3.3V±0.3V	1.8	2.7	--	ns
	t _{PD}	CL=10pF, RL=5KΩ V _{CC} =0.8V	--	22.5	--	ns
		V _{CC} =1.2V±0.1V	2.9	6.6	--	ns
		V _{CC} =1.5V±0.1V	2.6	4.8	--	ns
		V _{CC} =1.8V±0.15V	2.5	4.2	--	ns
		V _{CC} =2.5V±0.2V	2.3	3.5	--	ns
		V _{CC} =3.3V±0.3V	2.1	3.3	--	ns
	t _{PD}	CL=15pF, RL=5KΩ V _{CC} =0.8V	--	26	--	ns
		V _{CC} =1.2V±0.1V	3.2	7.4	--	ns
		V _{CC} =1.5V±0.1V	3.1	5.4	--	ns
		V _{CC} =1.8V±0.15V	2.7	4.7	--	ns
		V _{CC} =2.5V±0.2V	2.6	4.0	--	ns
		V _{CC} =3.3V±0.3V	2.5	3.7	--	ns
	t _{PD}	CL=30pF, RL=5KΩ V _{CC} =0.8V	--	36.3	--	ns
		V _{CC} =1.2V±0.1V	3.9	9.7	--	ns
		V _{CC} =1.5V±0.1V	3.5	7.0	--	ns
		V _{CC} =1.8V±0.15V	3.5	6.0	--	ns
		V _{CC} =2.5V±0.2V	3.4	5.1	--	ns
		V _{CC} =3.3V±0.3V	3.3	4.8	--	ns

TEST CIRCUIT AND WAVEFORMS

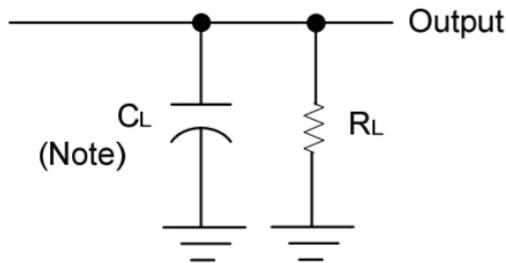


Note: C_L includes probe and jig capacitance.

	$V_{CC} = 0.8 \text{ V}$	$V_{CC} = 1.2 \text{ V} \pm 0.1 \text{ V}$	$V_{CC} = 1.5 \text{ V} \pm 0.1 \text{ V}$	$V_{CC} = 1.8 \text{ V} \pm 0.15 \text{ V}$	$V_{CC} = 2.5 \text{ V} \pm 0.2 \text{ V}$	$V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$
C_L V_M V_I	5, 10, 15, 30 pF $V_{CC}/2$ V_{CC}	5, 10, 15, 30 pF $V_{CC}/2$ V_{CC}	5, 10, 15, 30 pF $V_{CC}/2$ V_{CC}			

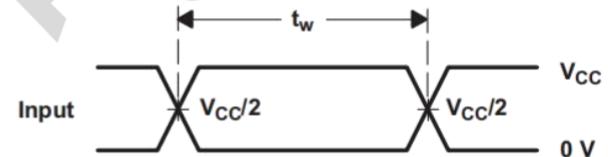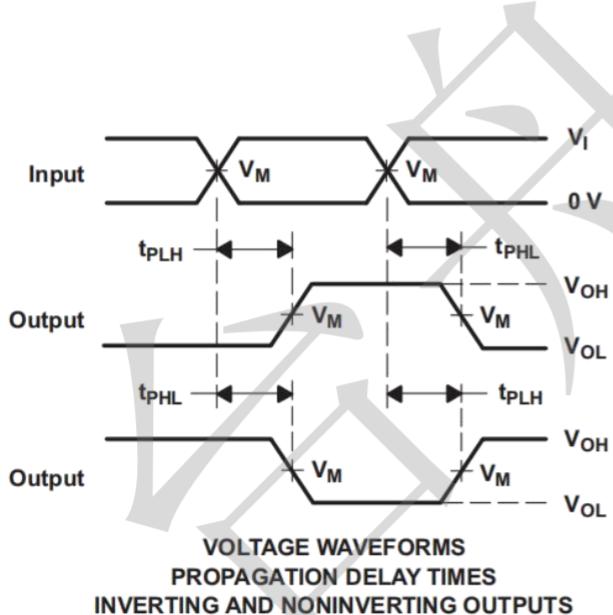

**VOLTAGE WAVEFORMS
PULSE DURATION**

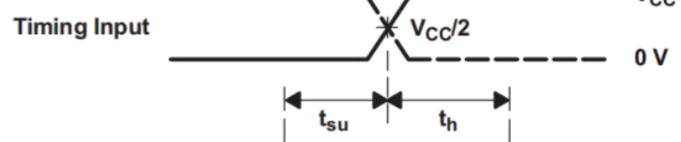


**VOLTAGE WAVEFORMS
SETUP AND HOLD TIMES**

NOTES:

- C_L includes probe and jig capacitance.
- All input pulses are supplied by generators having the following characteristics: $\text{PRR} \leq 10 \text{ MHz}$, $Z_O = 50 \text{ W}$, $\text{tr}/\text{tf} = 3 \text{ ns}$.
- The outputs are measured one at a time, with one transition per measurement.
- t_{PLH} and t_{PHL} are the same as t_{PD} .
- All parameters and waveforms are not applicable to all devices.

Package information (Unit: mm)

SOT363

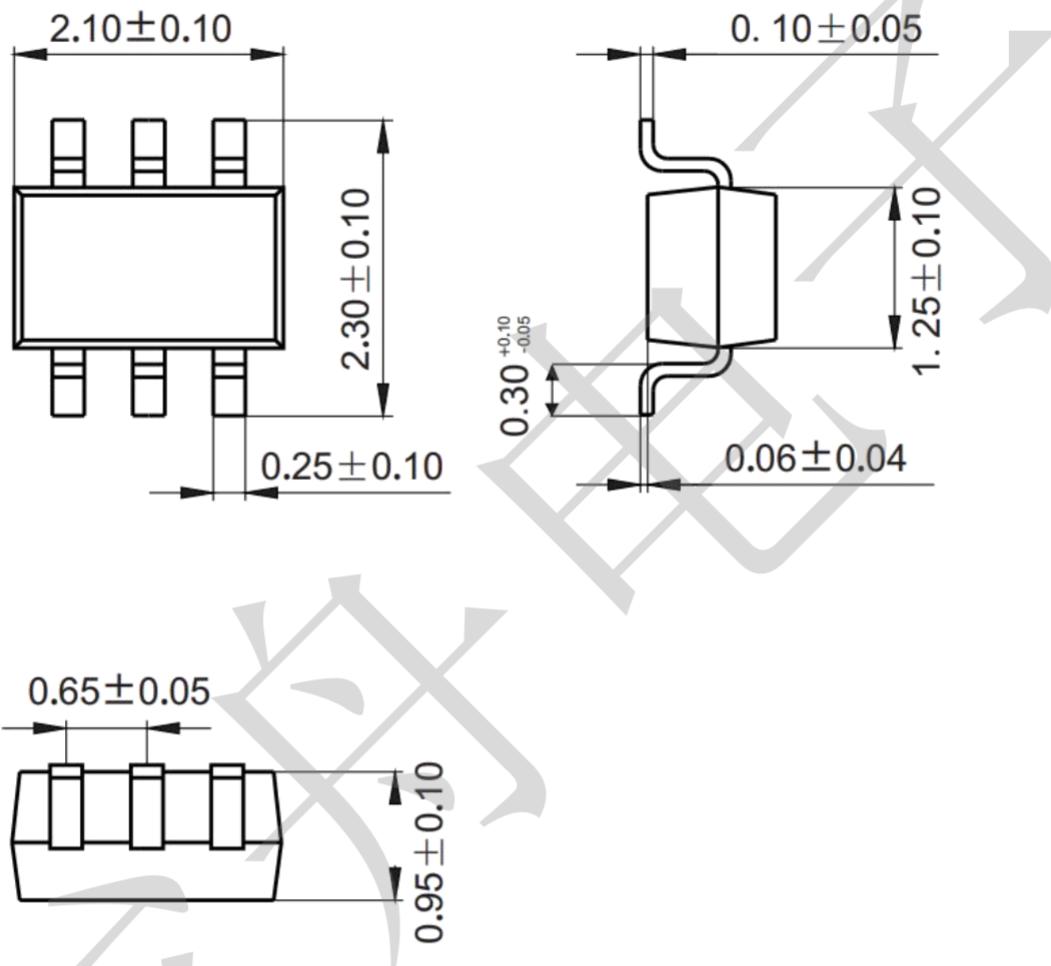

Mounting Pad Layout (unit: mm)

