PESD1CAN-U

2-Line Bi-directional TVS Diode Array

Features

- Ultra low leakage: nA level
- Operating voltage: 24V
- Low clamping voltage
- Complies with following standards:
  – IEC 61000-4-2 (ESD) immunity test
  Air discharge: ±30kV
  Contact discharge: ±30kV
  – IEC61000-4-4 (EFT) 40A (5/50ns)
  – IEC61000-4-5 (Lightning) 3A (8/20 μs)
- RoHS Compliant



SOT- 323



Applications

- Cell Phone Handsets andAccessories
- Microprocessor based equipment
- Personal DigitalAssistants(PDA 's)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Networking and Telecom
- Serial and Parallel Ports
- Peripherals

Mechanical Characteristics

- Package: SOT-323
- Lead Finish: Lead Free
- UL Flammability Classification Rating 94V-0
- Quantity Per Reel:3000pcs
- Reel Size:7 inch

SOT-323

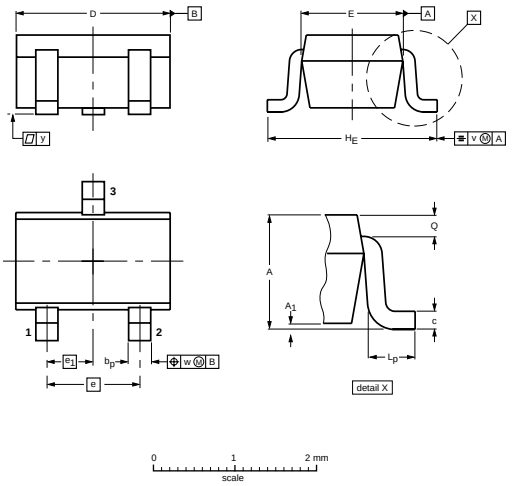

DIMENSIONS (mm are the original dimensions)

UNIT	A	A_1 max	b_p	c	D	E	e	e_1	H_E	L_p	Q	v	w
mm	1.1 0.8	0.1	0.4 0.3	0.25 0.10	2.2 1.8	1.35 1.15	1.3	0.65	2.2 2.0	0.45 0.15	0.23 0.13	0.2	0.2

Absolute Maximum Ratings(Tamb=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20μs)	Ppp	150	W
ESD per IEC 61000−4−2 (Air)	V_{ESD}	± 30	kV
ESD per IEC 61000−4−2 (Contact)		± 30	
Operating Temperature Range	T_J	-55 to +125	℃
Storage Temperature Range	T_{STJ}	-55 to +150	℃

PESD1CAN-U

Electrical Characteristics(TA=25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Working Voltage	V_{RWM}				24	V
Breakdown Voltage	V_{BR}	I_T = 1mA	27			V
Reverse Leakage Current	I_R	V_{RWM} = 24V			0.2	μA
Clamping Voltage	V_C	I_{PP} = 1A (8 x 20 μs pulse)			36	V
Clamping Voltage	V_C	I_{PP} = 3A (8 x 20 μs pulse)			50	V
Junction Capacitance	C_J	VR = 0V, f = 1MHz, Pin 1 to Pin 3 or Pin 2 to Pin 3		10		pF
Junction Capacitance	C_J	VR = 0V, f = 1MHz, Pin 1 to Pin 2		5		pF

RATING AND CHARACTERISTIC CURVES (PESD1CAN-U)

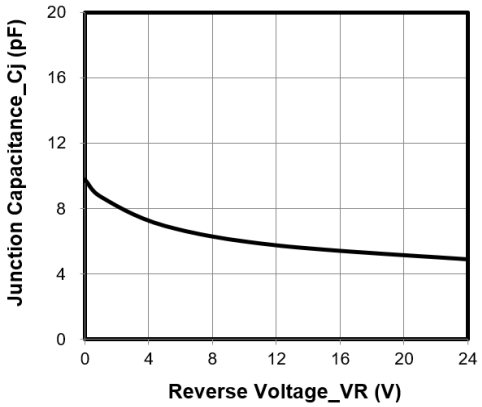

Junction Capacitance vs. Reverse Voltage

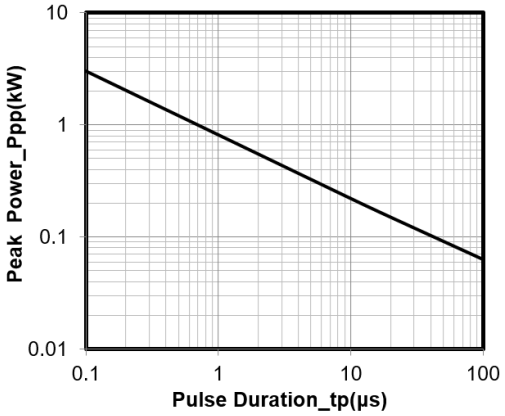

Peak Pulse Power vs. Pulse Time

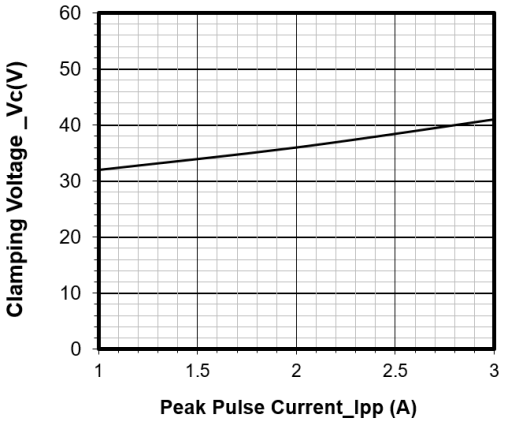

Clamping Voltage vs. Peak Pulse Current

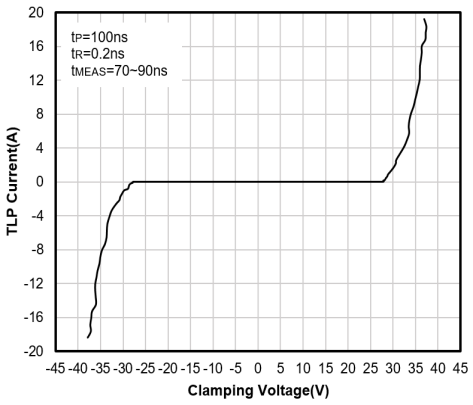

TLP Curve

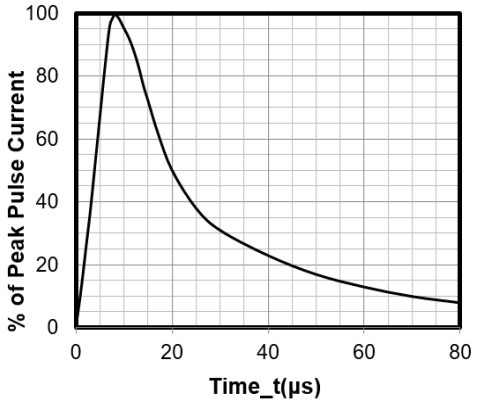

8 X 20μs Pulse Waveform

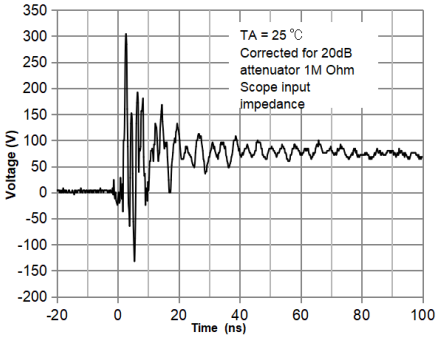

Note：Data is taken with a 10x attenuator

ESD Clamping Voltage
8 kV Contact per IEC61000−4−2